

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251685

Luminaire Tested: P3AS09R559030DE010 E3CB1MB

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1251685  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-36)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R559030DE010 E3CB1MB  
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 90CRI , E3CB1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 974.0 lumens  
Efficiency: N/A  
Efficacy: 87.7 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.82  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1251685

CATALOG NUMBER: P3AS09R559030DE010 E3CB1MB

### Luminous Intensity Polar Plot

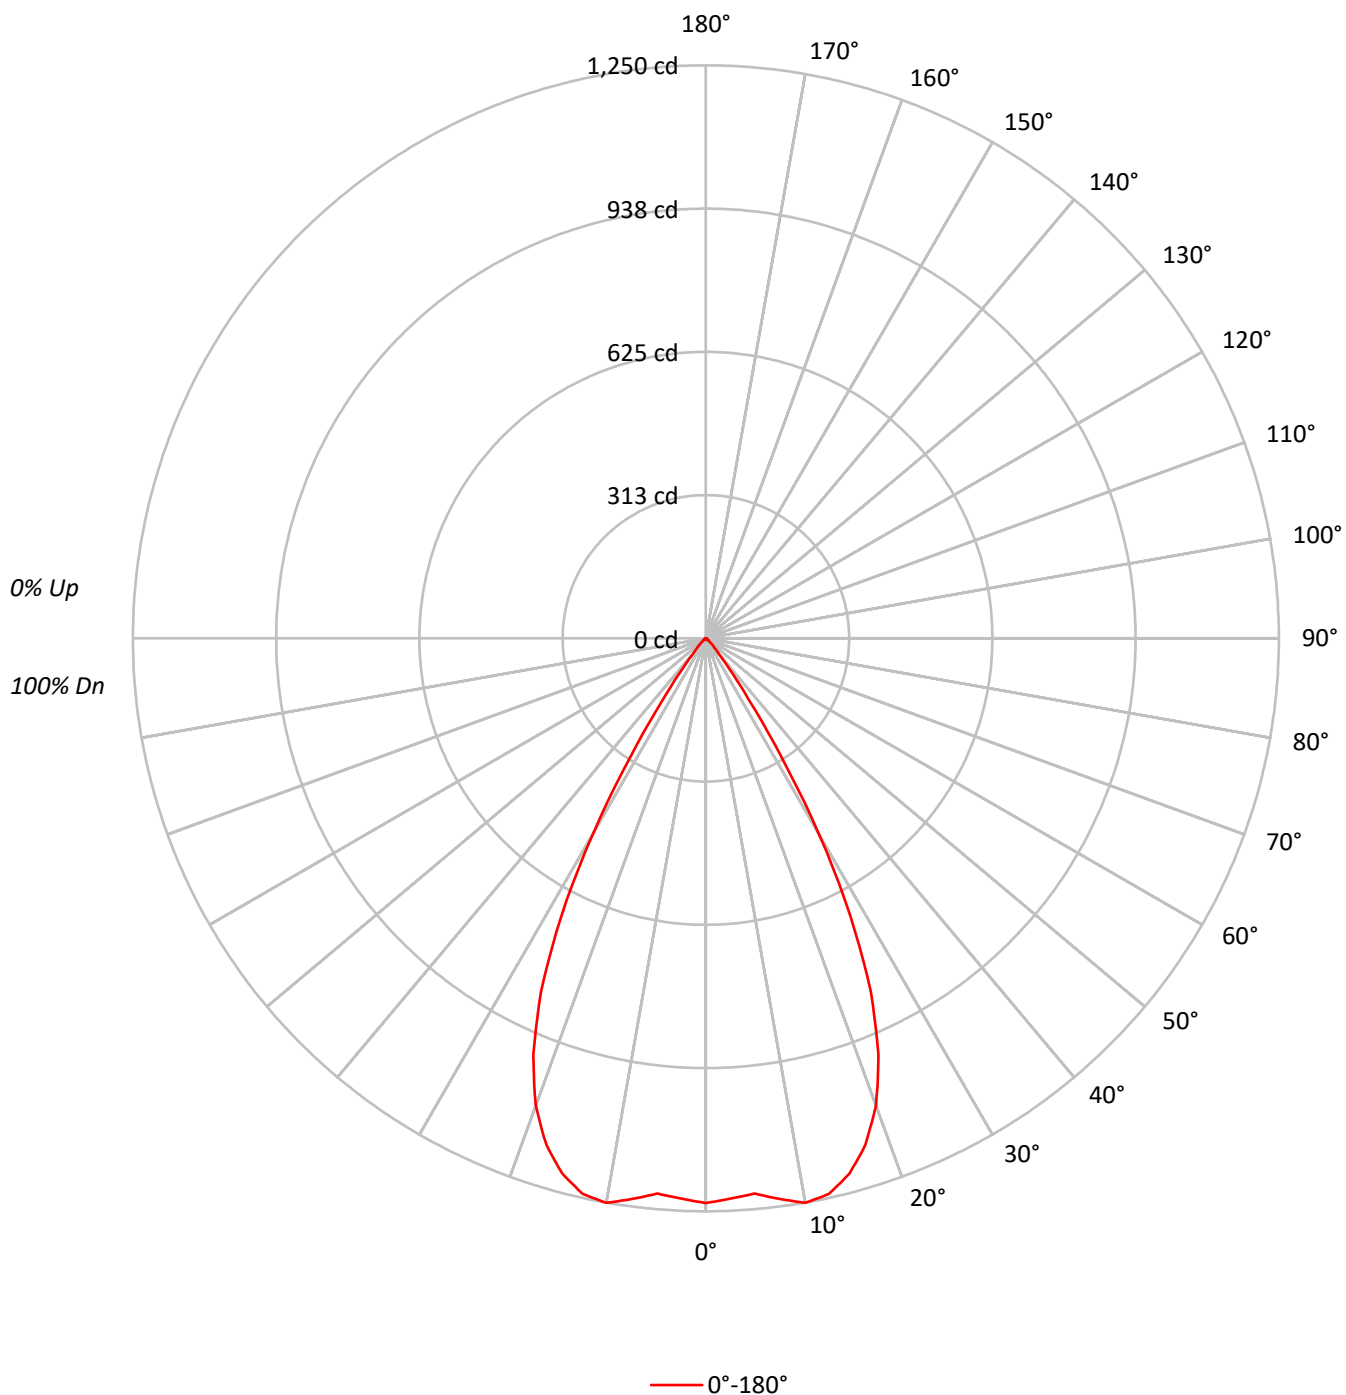

TEST NUMBER: P1251685

CATALOG NUMBER: P3AS09R559030DE010 E3CB1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 114 | 111 | 109 | 107 | 112 | 109 | 107 | 105 | 105 | 104 | 102 |  | 101 | 100 | 99  |  | 98  |
| 2   | 109 | 104 | 101 | 98  | 107 | 103 | 99  | 96  | 100 | 97  | 94  |  | 97  | 94  | 92  |  | 94  |
| 3   | 104 | 98  | 94  | 90  | 102 | 97  | 93  | 89  | 94  | 91  | 88  |  | 92  | 89  | 86  |  | 90  |
| 4   | 99  | 92  | 87  | 84  | 98  | 91  | 87  | 83  | 89  | 85  | 82  |  | 87  | 84  | 81  |  | 86  |
| 5   | 95  | 87  | 82  | 78  | 93  | 86  | 81  | 78  | 85  | 80  | 77  |  | 83  | 79  | 76  |  | 82  |
| 6   | 91  | 83  | 77  | 73  | 89  | 82  | 77  | 73  | 80  | 76  | 72  |  | 79  | 75  | 72  |  | 78  |
| 7   | 87  | 78  | 73  | 69  | 85  | 78  | 72  | 69  | 76  | 72  | 68  |  | 75  | 71  | 68  |  | 74  |
| 8   | 83  | 74  | 69  | 65  | 82  | 74  | 69  | 65  | 73  | 68  | 65  |  | 72  | 67  | 64  |  | 71  |
| 9   | 79  | 71  | 65  | 61  | 78  | 70  | 65  | 61  | 69  | 64  | 61  |  | 68  | 64  | 61  |  | 68  |
| 10  | 76  | 67  | 62  | 58  | 75  | 67  | 62  | 58  | 66  | 61  | 58  |  | 65  | 61  | 58  |  | 65  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 270154 |
| 5°  | 267642 |
| 10° | 278396 |
| 15° | 274531 |
| 20° | 253142 |
| 25° | 205972 |
| 30° | 125108 |
| 35° | 43313  |
| 40° | 12366  |
| 45° | 5892   |
| 50° | 2490   |
| 55° | 1109   |
| 60° | 1272   |
| 65° | 1141   |
| 70° | 962    |
| 75° | 1271   |
| 80° | 884    |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5892 cd/sqm

TEST NUMBER: P1251685

CATALOG NUMBER: P3AS09R559030DE010 E3CB1MB

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 117.5  | 12.1      |
| 10°-20°   | 336.1  | 34.5      |
| 20°-30°   | 374.7  | 38.5      |
| 30°-40°   | 122.6  | 12.6      |
| 40°-50°   | 16.2   | 1.7       |
| 50°-60°   | 3.4    | 0.3       |
| 60°-70°   | 2.0    | 0.2       |
| 70°-80°   | 1.3    | 0.1       |
| 80°-90°   | 0.3    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 828.3  | 85.0      |
| 0°-40°    | 950.9  | 97.6      |
| 0°-60°    | 970.4  | 99.6      |
| 0°-90°    | 974.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 974.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1232 |      |
| 5°  | 1216 | 118  |
| 15° | 1209 | 336  |
| 25° | 851  | 375  |
| 35° | 162  | 123  |
| 45° | 19   | 16   |
| 55° | 3    | 3    |
| 65° | 2    | 2    |
| 75° | 2    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1251685

CATALOG NUMBER: P3AS09R559030DE010 E3CB1MB

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1232.0 |
| 2.5°  | 1223.2 |
| 5°    | 1215.9 |
| 7.5°  | 1233.4 |
| 10°   | 1250.3 |
| 12.5° | 1241.5 |
| 15°   | 1209.3 |
| 17.5° | 1158.0 |
| 20°   | 1084.8 |
| 22.5° | 983.8  |
| 25°   | 851.3  |
| 27.5° | 683.0  |
| 30°   | 494.1  |
| 32.5° | 303.0  |
| 35°   | 161.8  |
| 37.5° | 82.0   |
| 40°   | 43.2   |
| 42.5° | 27.8   |
| 45°   | 19.0   |
| 47.5° | 13.2   |
| 50°   | 7.3    |
| 52.5° | 4.4    |
| 55°   | 2.9    |
| 57.5° | 2.9    |
| 60°   | 2.9    |
| 62.5° | 2.2    |
| 65°   | 2.2    |
| 67.5° | 1.5    |
| 70°   | 1.5    |
| 72.5° | 1.5    |
| 75°   | 1.5    |
| 77.5° | 0.7    |
| 80°   | 0.7    |
| 82.5° | 0.7    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)