

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251757

Luminaire Tested: P3AS09R659030DE010 E3DL1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251757
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R659030DE010 E3DL1MW
Description: 3in Adjustable LED luminaire with, R65 optic, 3000K CCT AND, 90CRI , E3DL1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 734.0 lumens
Efficiency: N/A
Efficacy: 66.1 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251757
CATALOG NUMBER: P3AS09R659030DE010 E3DL1MW

Luminous Intensity Polar Plot

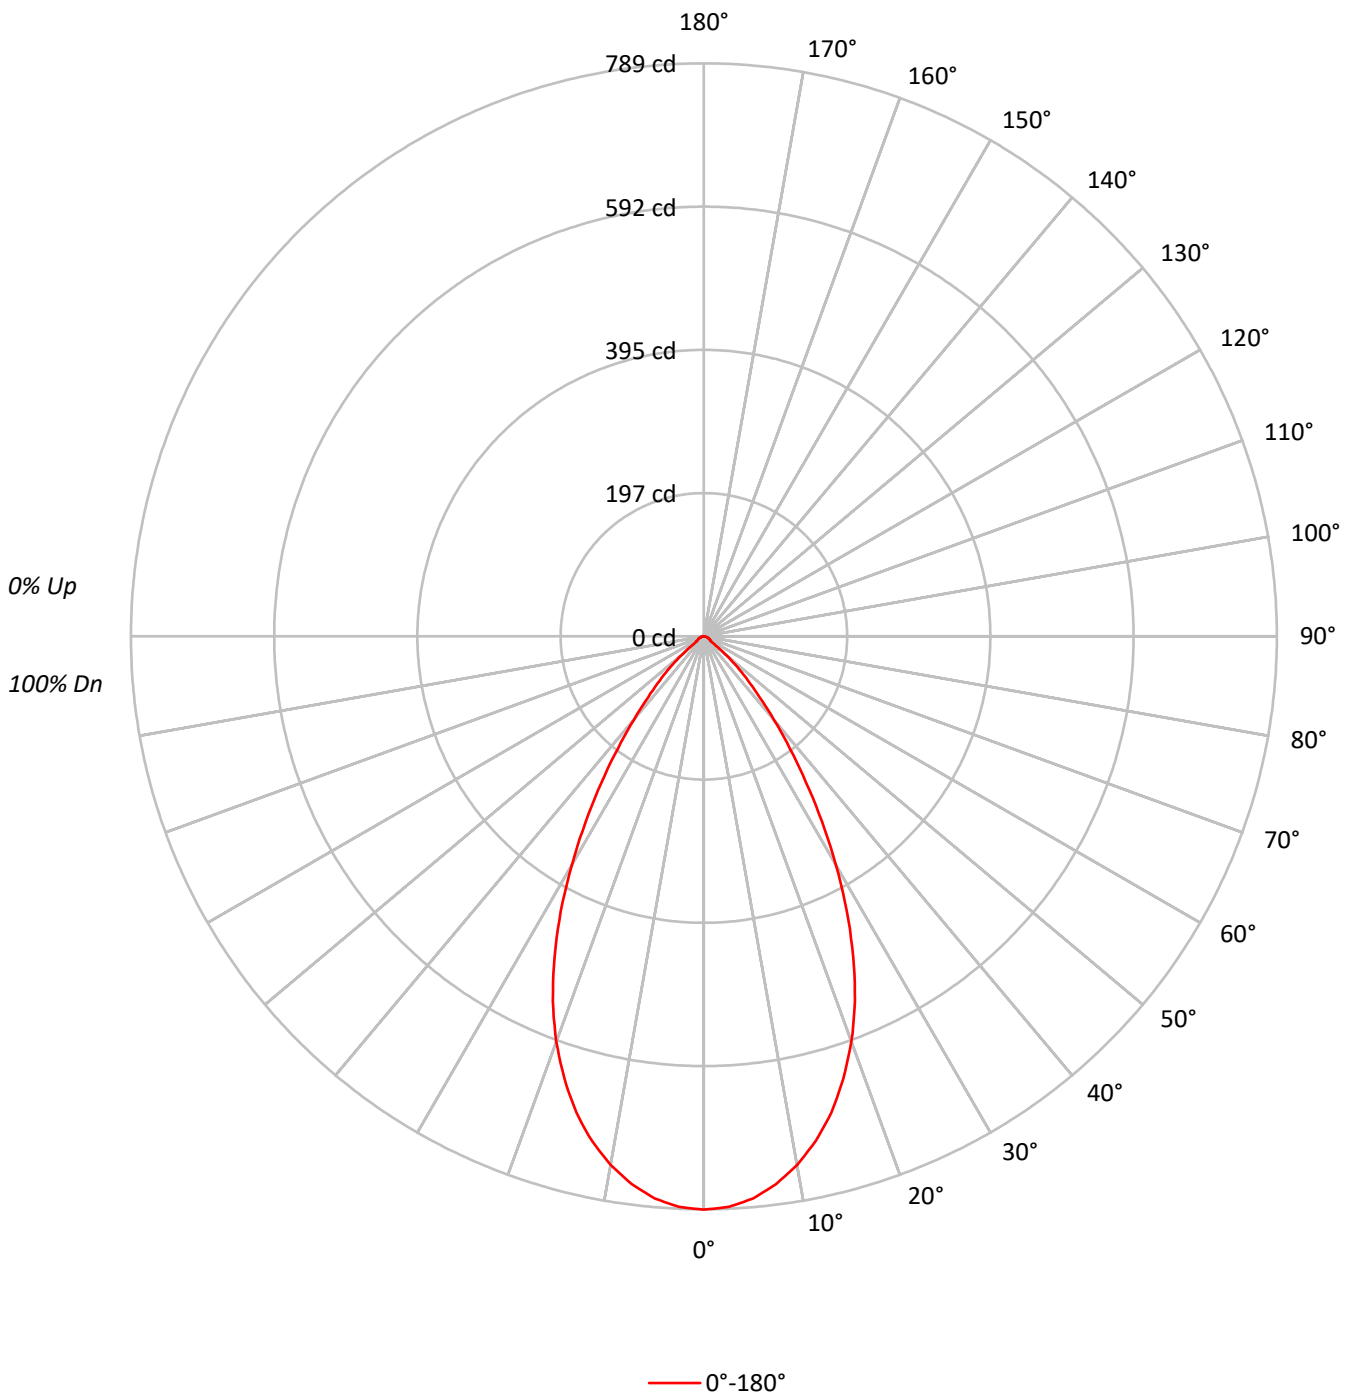



TEST NUMBER: P1251757
 CATALOG NUMBER: P3AS09R659030DE010 E3DL1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	96	94	93			
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			
3	101	95	89	85	99	93	88	84	90	86	83	88	85	82	86	83	80	79			
4	96	88	82	78	94	87	81	77	85	80	76	83	79	75	81	77	74	73			
5	91	82	76	71	89	81	75	71	79	74	70	77	73	70	76	72	69	68			
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	72	67	64	63			
7	82	72	66	61	80	71	65	61	70	64	61	69	64	60	67	63	60	58			
8	77	67	61	57	76	67	61	57	66	60	57	65	60	56	64	59	56	55			
9	74	64	57	53	72	63	57	53	62	57	53	61	56	53	60	56	53	51			
10	70	60	54	50	69	59	54	50	59	53	50	58	53	50	57	53	49	48			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	173100
5°	171032
10°	164526
15°	154121
20°	138635
25°	117708
30°	92065
35°	65611
40°	42938
45°	26545
50°	13475
55°	4741
60°	4166
65°	4151
70°	3783
75°	3728
80°	3662
85°	3774

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 26545 cd/sqm



TEST NUMBER: P1251757
 CATALOG NUMBER: P3AS09R659030DE010 E3DL1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	72.9	9.9
10°-20°	189.0	25.7
20°-30°	220.8	30.1
30°-40°	154.3	21.0
40°-50°	67.9	9.3
50°-60°	15.1	2.1
60°-70°	7.7	1.0
70°-80°	4.6	0.6
80°-90°	1.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	482.7	65.8
0°-40°	637.0	86.8
0°-60°	720.1	98.1
0°-90°	734.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	734.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	789	
5°	777	73
15°	679	189
25°	486	221
35°	245	154
45°	86	68
55°	12	15
65°	8	8
75°	4	5
85°	2	2
90°	0	



TEST NUMBER: P1251757
CATALOG NUMBER: P3AS09R659030DE010 E3DL1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	789.4
2.5°	786.5
5°	777.0
7.5°	760.9
10°	738.9
12.5°	711.8
15°	678.9
17.5°	638.7
20°	594.1
22.5°	543.6
25°	486.5
27.5°	426.5
30°	363.6
32.5°	302.9
35°	245.1
37.5°	194.6
40°	150.0
42.5°	113.4
45°	85.6
47.5°	62.9
50°	39.5
52.5°	20.5
55°	12.4
57.5°	11.0
60°	9.5
62.5°	8.8
65°	8.0
67.5°	6.6
70°	5.9
72.5°	5.1
75°	4.4
77.5°	3.7
80°	2.9
82.5°	2.2
85°	1.5
87.5°	0.7
90°	0.0

(END OF REPORT)