

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251773

Luminaire Tested: P3AS09R709030DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251773
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R709030DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R70 optic, 3000K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 915.0 lumens
Efficiency: N/A
Efficacy: 82.4 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251773

CATALOG NUMBER: P3AS09R709030DE010 E3CB1MMS

Luminous Intensity Polar Plot

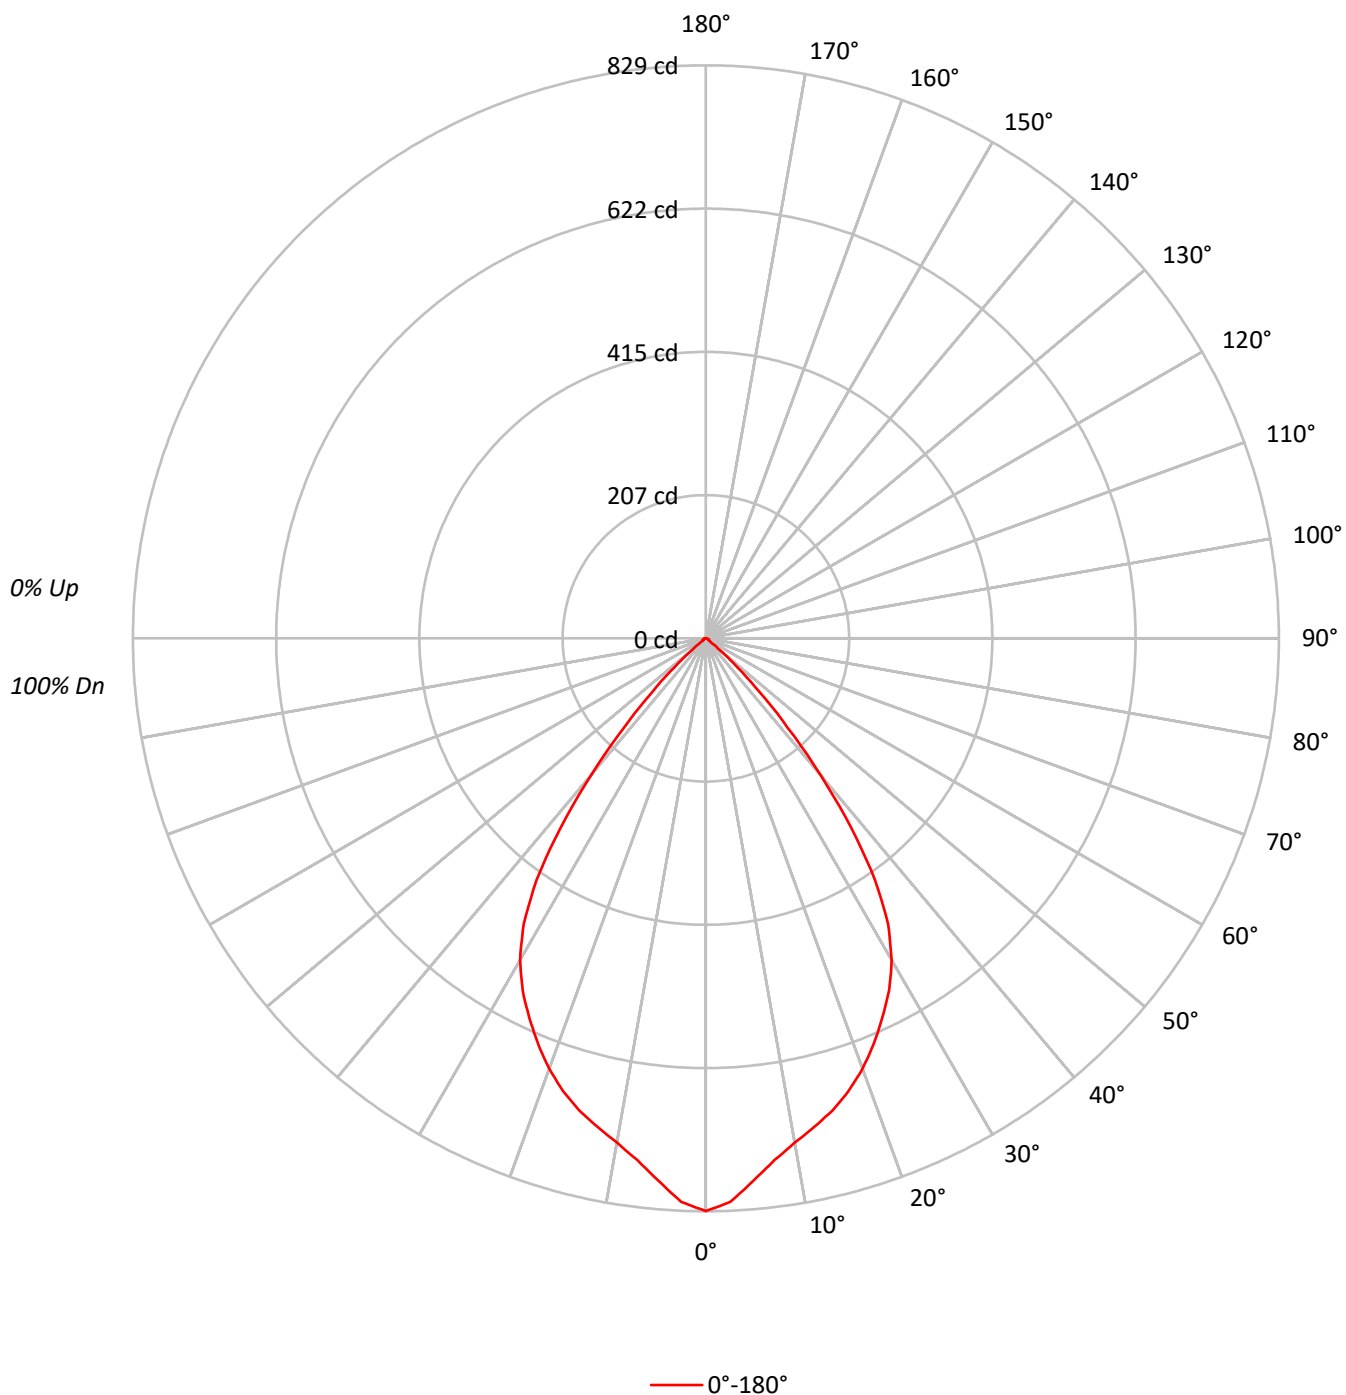

TEST NUMBER: P1251773

CATALOG NUMBER: P3AS09R709030DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	95	87	81	77	94	86	81	76	84	79	75		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	76	66	59	55	75	65	59	55	64	58	55		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	50		58
10	68	58	52	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	181696
5°	173365
10°	164949
15°	160546
20°	154620
25°	146331
30°	136097
35°	114331
40°	73681
45°	34236
50°	8972
55°	2256
60°	2237
65°	1920
70°	1859
75°	1864
80°	1894
85°	1761

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 34236 cd/sqm

TEST NUMBER: P1251773

CATALOG NUMBER: P3AS09R709030DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.7	8.1
10°-20°	198.7	21.7
20°-30°	277.6	30.3
30°-40°	257.4	28.1
40°-50°	92.3	10.1
50°-60°	7.8	0.9
60°-70°	3.9	0.4
70°-80°	2.5	0.3
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	550.1	60.1
0°-40°	807.5	88.3
0°-60°	907.6	99.2
0°-90°	915.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	915.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	829	
5°	788	74
15°	707	199
25°	605	278
35°	427	257
45°	110	92
55°	6	8
65°	4	4
75°	2	3
85°	1	1
90°	0	

TEST NUMBER: P1251773

CATALOG NUMBER: P3AS09R709030DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	828.6
2.5°	816.2
5°	787.6
7.5°	761.3
10°	740.8
12.5°	724.0
15°	707.2
17.5°	686.7
20°	662.6
22.5°	634.8
25°	604.8
27.5°	574.1
30°	537.5
32.5°	490.7
35°	427.1
37.5°	345.9
40°	257.4
42.5°	175.5
45°	110.4
47.5°	61.4
50°	26.3
52.5°	8.8
55°	5.9
57.5°	5.1
60°	5.1
62.5°	4.4
65°	3.7
67.5°	3.7
70°	2.9
72.5°	2.9
75°	2.2
77.5°	2.2
80°	1.5
82.5°	1.5
85°	0.7
87.5°	0.7
90°	0.0

(END OF REPORT)