

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1251944

Luminaire Tested: P3AS13R259030DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1251944
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-11)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R259030DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1017.0 lumens
Efficiency: N/A
Efficacy: 69.7 lumens/watt
Spacing Criteria (0/90/45): 0.49 / 0.49 / 0.51
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1251944
CATALOG NUMBER: P3AS13R259030DE010 E3DLP1WH

Luminous Intensity Polar Plot

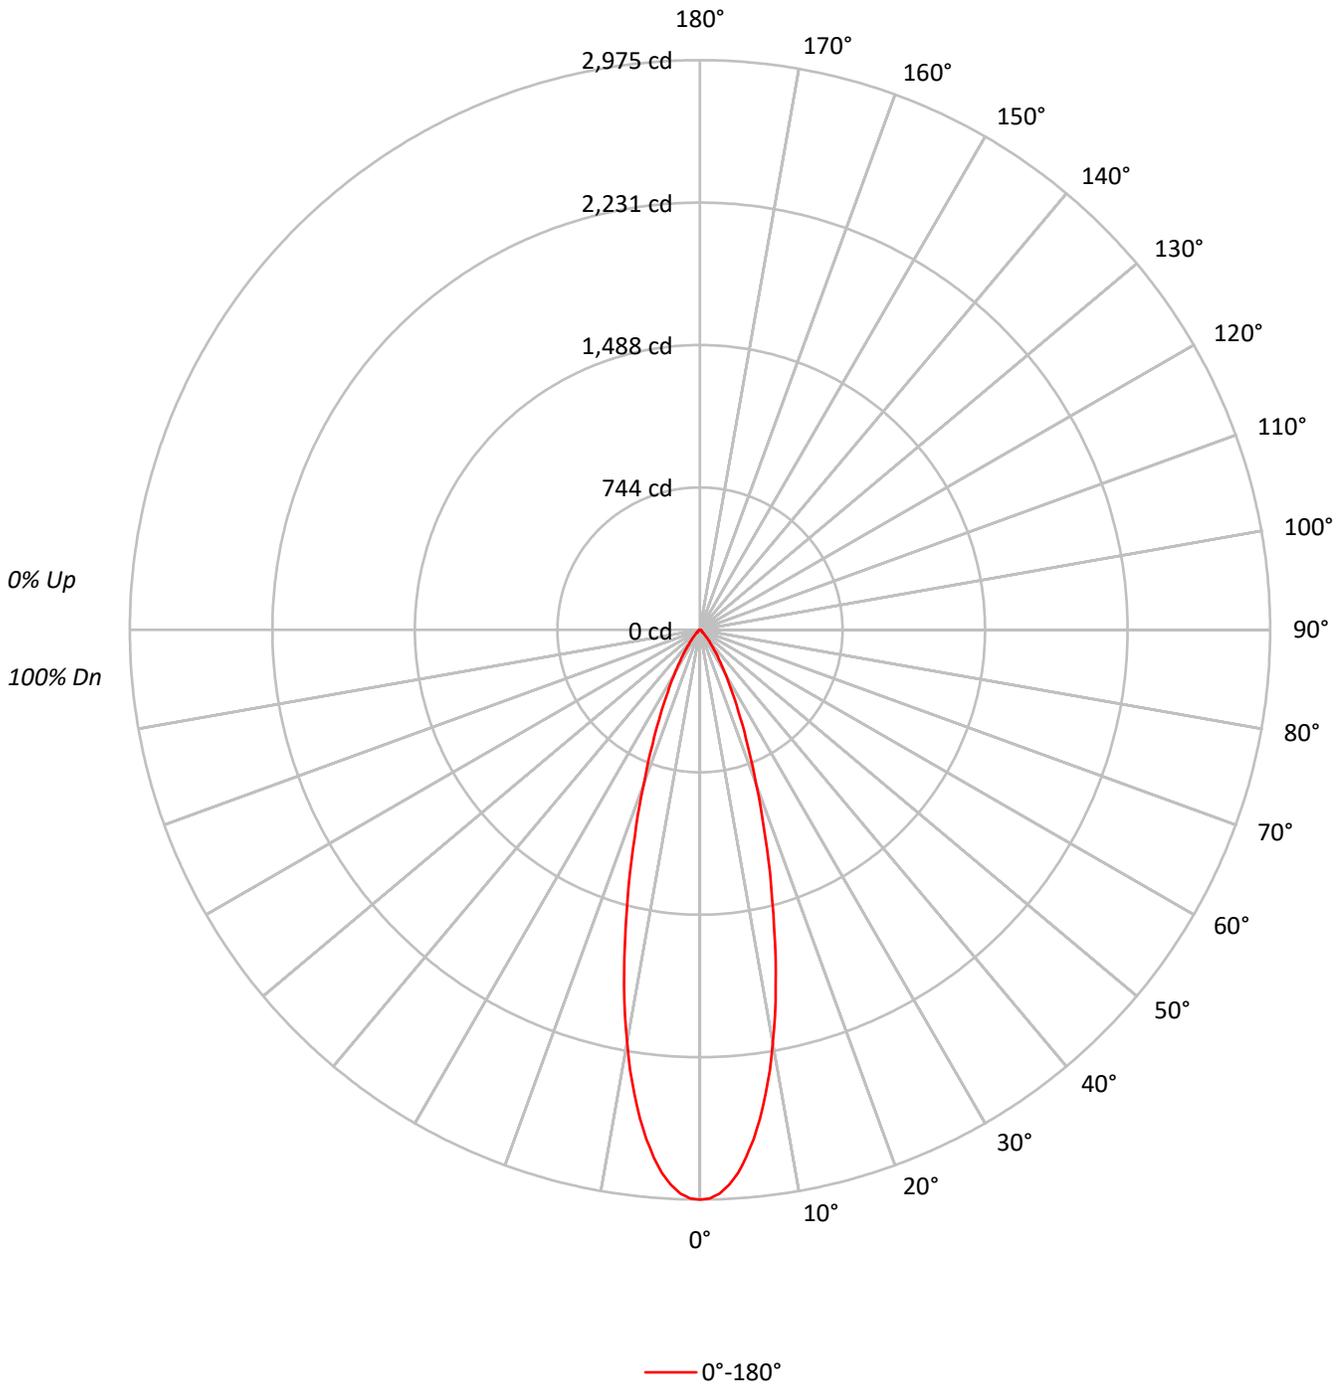



TEST NUMBER: P1251944
 CATALOG NUMBER: P3AS13R259030DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	110	105	102	99	107	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90
3	105	100	96	92	103	98	95	91	96	93	90	94	91	89	91	89	87	86	86	86	86
4	101	95	90	87	99	94	89	86	92	88	85	90	87	84	88	85	83	82	82	82	82
5	97	90	85	82	96	89	85	81	88	84	81	86	83	80	85	82	79	78	78	78	78
6	94	86	81	78	92	86	81	78	84	80	77	83	79	77	82	78	76	75	75	75	75
7	90	83	78	74	89	82	77	74	81	77	74	80	76	73	79	75	73	72	72	72	72
8	87	79	74	71	86	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
9	84	76	71	68	83	76	71	68	75	71	68	74	70	68	73	70	67	66	66	66	66
10	81	73	69	65	80	73	68	65	72	68	65	72	68	65	71	67	65	64	64	64	64

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	652360
5°	608649
10°	487566
15°	330967
20°	200264
25°	117104
30°	66694
35°	36674
40°	19465
45°	10234
50°	5970
55°	4473
60°	3815
65°	4047
70°	3719
75°	3304
80°	2399
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10234 cd/sqm



TEST NUMBER: P1251944
 CATALOG NUMBER: P3AS13R259030DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	245.4	24.1
10°-20°	400.8	39.4
20°-30°	229.0	22.5
30°-40°	90.4	8.9
40°-50°	27.7	2.7
50°-60°	10.9	1.1
60°-70°	7.3	0.7
70°-80°	4.1	0.4
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	875.2	86.1
0°-40°	965.6	94.9
0°-60°	1004.2	98.7
0°-90°	1017.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1017.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2975	
5°	2765	245
15°	1458	401
25°	484	229
35°	137	90
45°	33	28
55°	12	11
65°	8	7
75°	4	4
85°	1	1
90°	0	



TEST NUMBER: P1251944
CATALOG NUMBER: P3AS13R259030DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	2975.0
1°	2969.2
2°	2944.9
3°	2902.1
4°	2842.9
5°	2765.1
6°	2673.7
7°	2570.7
8°	2451.2
9°	2328.7
10°	2189.7
11°	2052.7
12°	1902.0
13°	1753.3
14°	1600.7
15°	1457.9
17.5°	1130.3
20°	858.2
22.5°	644.4
25°	484.0
27.5°	358.6
30°	263.4
32.5°	190.5
35°	137.0
37.5°	97.2
40°	68.0
42.5°	46.7
45°	33.0
47.5°	23.3
50°	17.5
52.5°	13.6
55°	11.7
57.5°	10.7
60°	8.7
62.5°	7.8
65°	7.8
67.5°	6.8
70°	5.8
72.5°	4.9
75°	3.9
77.5°	2.9
80°	1.9
82.5°	1.9
85°	1.0
87.5°	1.0



TEST NUMBER: P1251944
CATALOG NUMBER: P3AS13R259030DE010 E3DLP1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)