

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252005

Luminaire Tested: P3AS13R359030DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252005
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R359030DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 630.0 lumens
Efficiency: N/A
Efficacy: 43.2 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252005

CATALOG NUMBER: P3AS13R359030DE010 E3DLP1WMH

Luminous Intensity Polar Plot

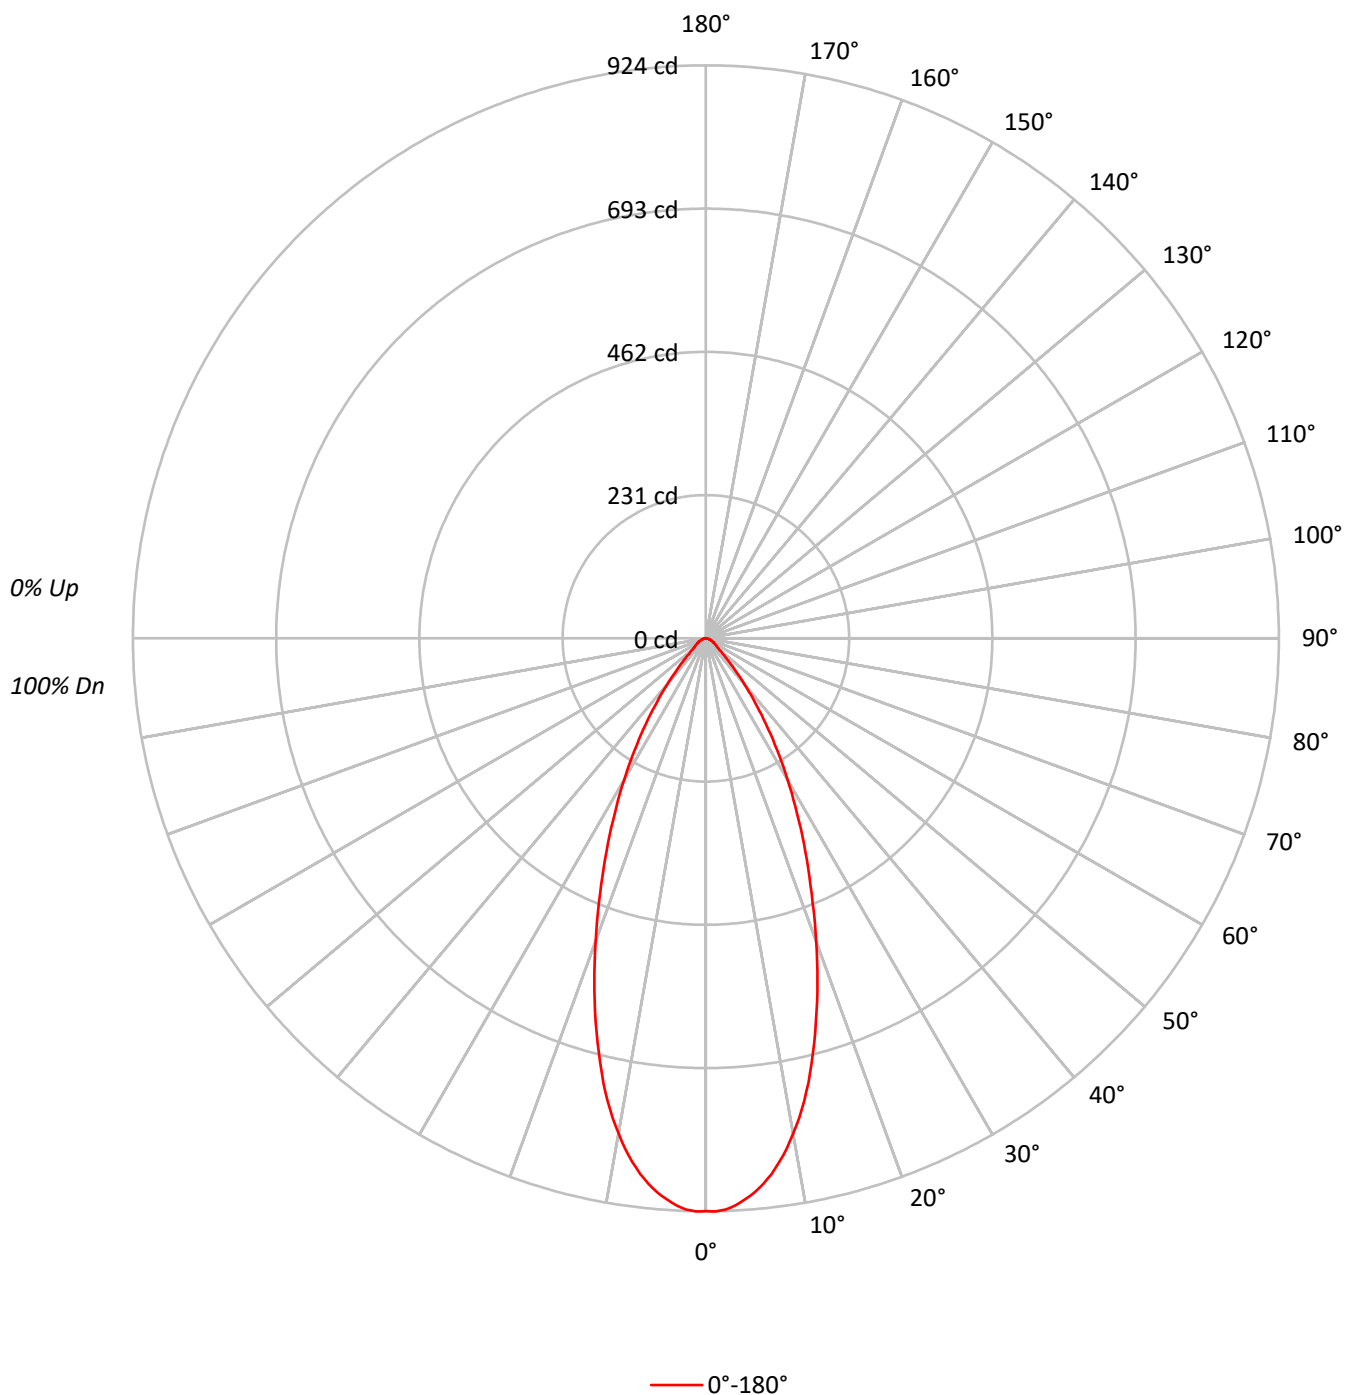

TEST NUMBER: P1252005

CATALOG NUMBER: P3AS13R359030DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	202506
5°	197512
10°	180558
15°	153259
20°	121321
25°	91771
30°	66795
35°	45186
40°	27766
45°	15940
50°	9586
55°	7799
60°	6798
65°	6019
70°	5001
75°	4914
80°	4925
85°	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 15940 cd/sqm

TEST NUMBER: P1252005

CATALOG NUMBER: P3AS13R359030DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	82.9	13.2
10°-20°	186.1	29.5
20°-30°	174.1	27.6
30°-40°	106.6	16.9
40°-50°	42.0	6.7
50°-60°	18.5	2.9
60°-70°	11.5	1.8
70°-80°	6.2	1.0
80°-90°	2.1	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	443.2	70.3
0°-40°	549.7	87.3
0°-60°	610.2	96.9
0°-90°	630.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	630.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	924	
5°	897	83
15°	675	186
25°	379	174
35°	169	107
45°	51	42
55°	20	19
65°	12	12
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1252005

CATALOG NUMBER: P3AS13R359030DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	923.5
1°	924.4
2°	921.5
3°	915.7
4°	907.0
5°	897.3
6°	884.7
7°	870.1
8°	852.7
9°	833.3
10°	810.9
11°	787.7
12°	762.4
13°	735.3
14°	705.2
15°	675.1
17.5°	597.5
20°	519.9
22.5°	445.2
25°	379.3
27.5°	318.2
30°	263.8
32.5°	213.4
35°	168.8
37.5°	129.0
40°	97.0
42.5°	69.8
45°	51.4
47.5°	36.9
50°	28.1
52.5°	23.3
55°	20.4
57.5°	17.5
60°	15.5
62.5°	13.6
65°	11.6
67.5°	9.7
70°	7.8
72.5°	6.8
75°	5.8
77.5°	4.9
80°	3.9
82.5°	2.9
85°	1.9
87.5°	1.0



TEST NUMBER: P1252005

CATALOG NUMBER: P3AS13R359030DE010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)