

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252020

Luminaire Tested: P3AS13R409030DE010 E3DL1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1252020  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R409030DE010 E3DL1GPH  
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 90CRI , E3DL1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 555.0 lumens  
Efficiency: N/A  
Efficacy: 38.0 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1252020  
CATALOG NUMBER: P3AS13R409030DE010 E3DL1GPH

### Luminous Intensity Polar Plot

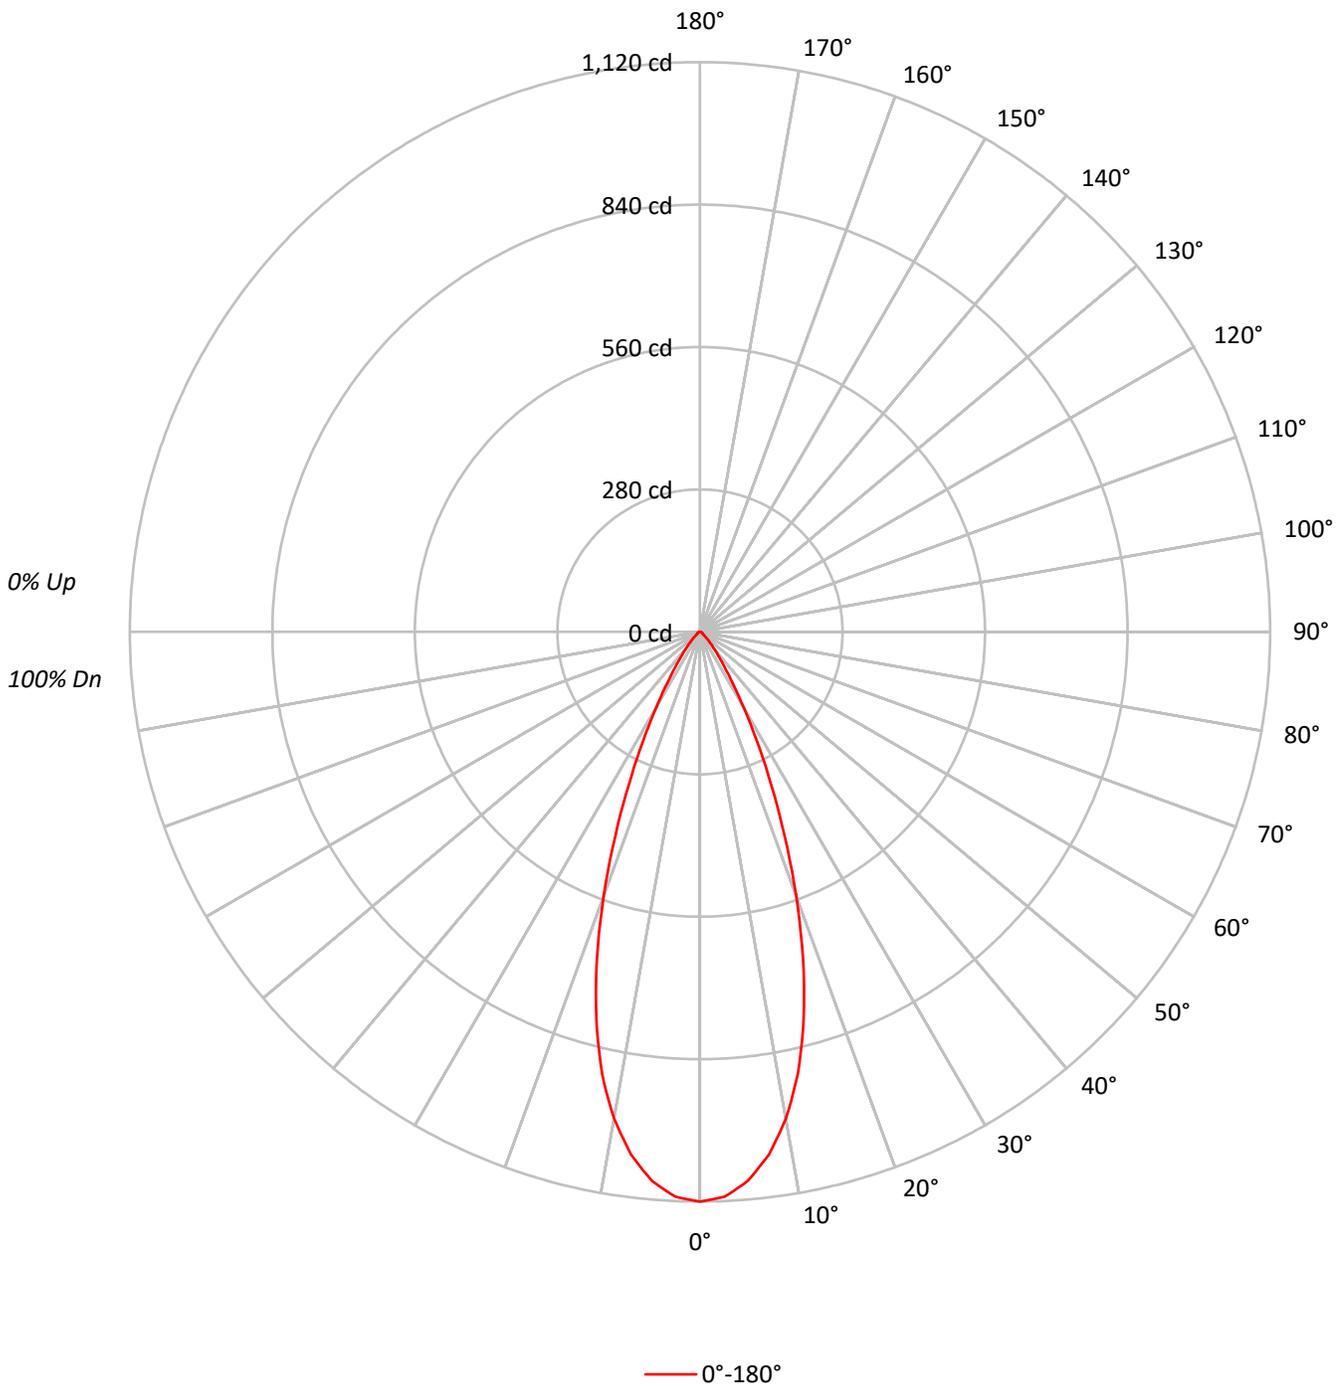



TEST NUMBER: P1252020

CATALOG NUMBER: P3AS13R409030DE010 E3DL1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	94	94	94	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89	89	89	89
3	104	99	94	91	102	97	93	90	95	91	88	92	89	87	90	88	86	84	84	84	84
4	100	93	88	85	98	92	88	84	90	86	83	88	85	82	86	84	81	80	80	80	80
5	96	88	83	79	94	88	83	79	86	82	78	84	81	78	83	80	77	76	76	76	76
6	92	84	79	75	91	83	78	75	82	78	74	81	77	74	79	76	73	72	72	72	72
7	88	80	75	71	87	79	74	71	78	74	71	77	73	70	76	73	70	69	69	69	69
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65	65	65	65
9	82	73	68	64	81	73	68	64	72	67	64	71	67	64	70	66	64	63	63	63	63
10	78	70	65	62	78	70	65	61	69	64	61	68	64	61	67	64	61	60	60	60	60

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	245594
5°	238454
10°	216384
15°	178752
20°	128951
25°	79747
30°	43171
35°	22326
40°	12137
45°	6791
50°	3411
55°	2561
60°	2281
65°	2231
70°	2116
75°	2033
80°	1768
85°	1258

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6791 cd/sqm



TEST NUMBER: P1252020  
 CATALOG NUMBER: P3AS13R409030DE010 E3DL1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	99.9	18.0
10°-20°	214.4	38.6
20°-30°	153.0	27.6
30°-40°	56.3	10.2
40°-50°	17.7	3.2
50°-60°	6.2	1.1
60°-70°	4.2	0.8
70°-80°	2.5	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	467.3	84.2
0°-40°	523.6	94.3
0°-60°	547.5	98.6
0°-90°	555.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	555.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1120	
5°	1083	100
15°	787	214
25°	330	153
35°	83	56
45°	22	18
55°	7	6
65°	4	4
75°	2	3
85°	0	1
90°	0	



TEST NUMBER: P1252020  
CATALOG NUMBER: P3AS13R409030DE010 E3DL1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1120.0
2.5°	1111.4
5°	1083.3
7.5°	1036.6
10°	971.8
12.5°	889.4
15°	787.4
17.5°	673.1
20°	552.6
22.5°	434.0
25°	329.6
27.5°	242.0
30°	170.5
32.5°	119.6
35°	83.4
37.5°	59.1
40°	42.4
42.5°	30.5
45°	21.9
47.5°	14.8
50°	10.0
52.5°	7.1
55°	6.7
57.5°	6.2
60°	5.2
62.5°	4.8
65°	4.3
67.5°	3.8
70°	3.3
72.5°	2.9
75°	2.4
77.5°	1.9
80°	1.4
82.5°	1.0
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)