

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252079

Luminaire Tested: P3AS13R509030DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252079
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R509030DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R50 optic, 3000K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1093.0 lumens
Efficiency: N/A
Efficacy: 74.9 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252079

CATALOG NUMBER: P3AS13R509030DE010 E3DL1WMH

Luminous Intensity Polar Plot

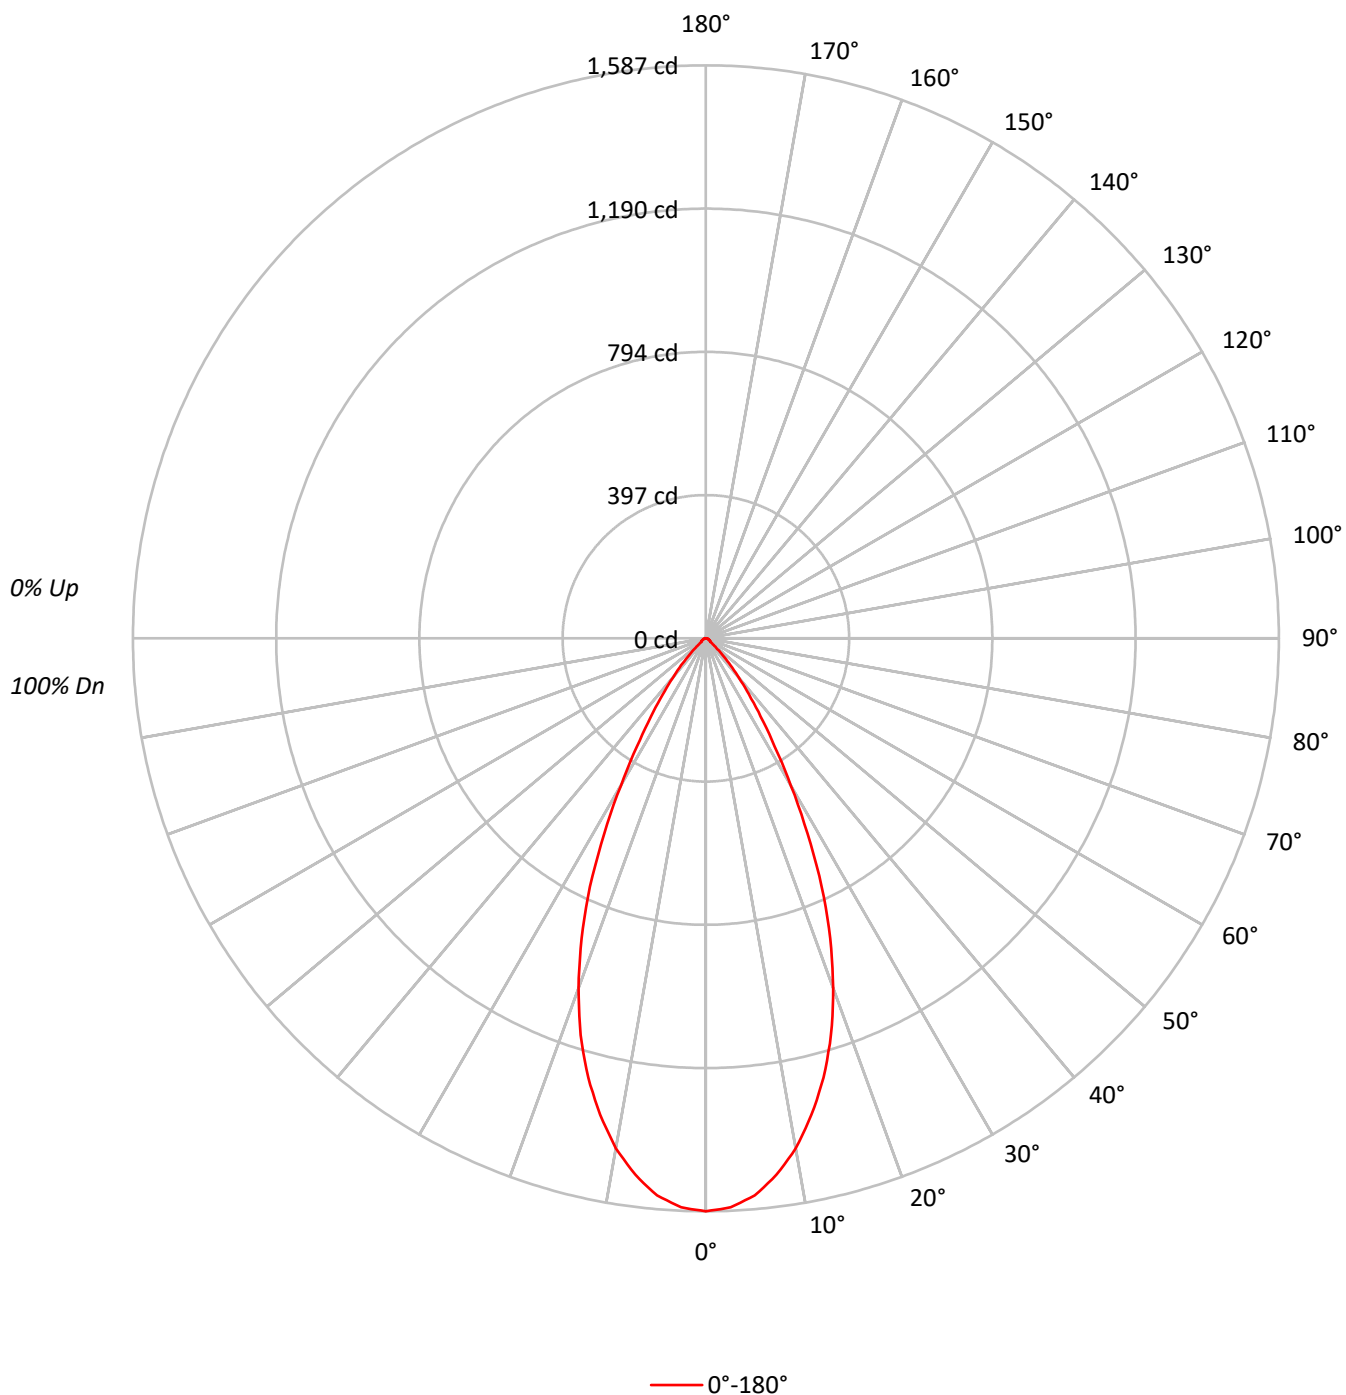

TEST NUMBER: P1252079

CATALOG NUMBER: P3AS13R509030DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	108	106	111	109	106	104	105	103	101		101	99	98		97
2	108	103	99	96	106	102	98	95	98	95	93		95	93	91		93
3	103	97	92	88	101	95	91	87	93	89	86		90	87	84		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	80	75	92	84	79	75	83	78	74		81	77	74		79
6	89	80	75	71	88	80	74	70	78	73	70		77	73	69		75
7	85	76	70	66	84	75	70	66	74	69	66		73	69	65		72
8	81	72	66	62	80	71	66	62	70	65	62		69	65	62		68
9	78	68	63	59	76	68	62	59	67	62	59		66	62	58		65
10	74	65	59	56	73	65	59	56	64	59	55		63	58	55		62

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	347998
5°	340985
10°	319388
15°	285927
20°	240611
25°	183640
30°	119335
35°	70751
40°	40905
45°	20498
50°	7642
55°	5926
60°	5526
65°	5033
70°	5001
75°	4914
80°	4925
85°	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 20498 cd/sqm

TEST NUMBER: P1252079

CATALOG NUMBER: P3AS13R509030DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.1	13.2
10°-20°	348.3	31.9
20°-30°	341.7	31.3
30°-40°	172.1	15.7
40°-50°	54.4	5.0
50°-60°	14.1	1.3
60°-70°	10.0	0.9
70°-80°	6.2	0.6
80°-90°	2.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	834.1	76.3
0°-40°	1006.3	92.1
0°-60°	1074.8	98.3
0°-90°	1093.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1093.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1587	
5°	1549	144
15°	1260	348
25°	759	342
35°	264	172
45°	66	54
55°	16	14
65°	10	10
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1252079

CATALOG NUMBER: P3AS13R509030DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1587.0
2.5°	1577.3
5°	1549.1
7.5°	1498.5
10°	1434.4
12.5°	1351.8
15°	1259.5
17.5°	1152.6
20°	1031.1
22.5°	899.9
25°	759.0
27.5°	609.3
30°	471.3
32.5°	354.7
35°	264.3
37.5°	195.3
40°	142.9
42.5°	101.1
45°	66.1
47.5°	37.9
50°	22.4
52.5°	16.5
55°	15.5
57.5°	13.6
60°	12.6
62.5°	11.7
65°	9.7
67.5°	8.7
70°	7.8
72.5°	6.8
75°	5.8
77.5°	4.9
80°	3.9
82.5°	2.9
85°	1.9
87.5°	1.0
90°	0.0

(END OF REPORT)