

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252134

Luminaire Tested: P3AS13R609030DE010 E3DL1LI

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252134
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-39)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R609030DE010 E3DL1LI
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 90CRI , E3DL1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1022.0 lumens
Efficiency: N/A
Efficacy: 70.0 lumens/watt
Spacing Criteria (0/90/45): 0.87 / 0.87 / 0.87
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252134

CATALOG NUMBER: P3AS13R609030DE010 E3DL1LI

Luminous Intensity Polar Plot

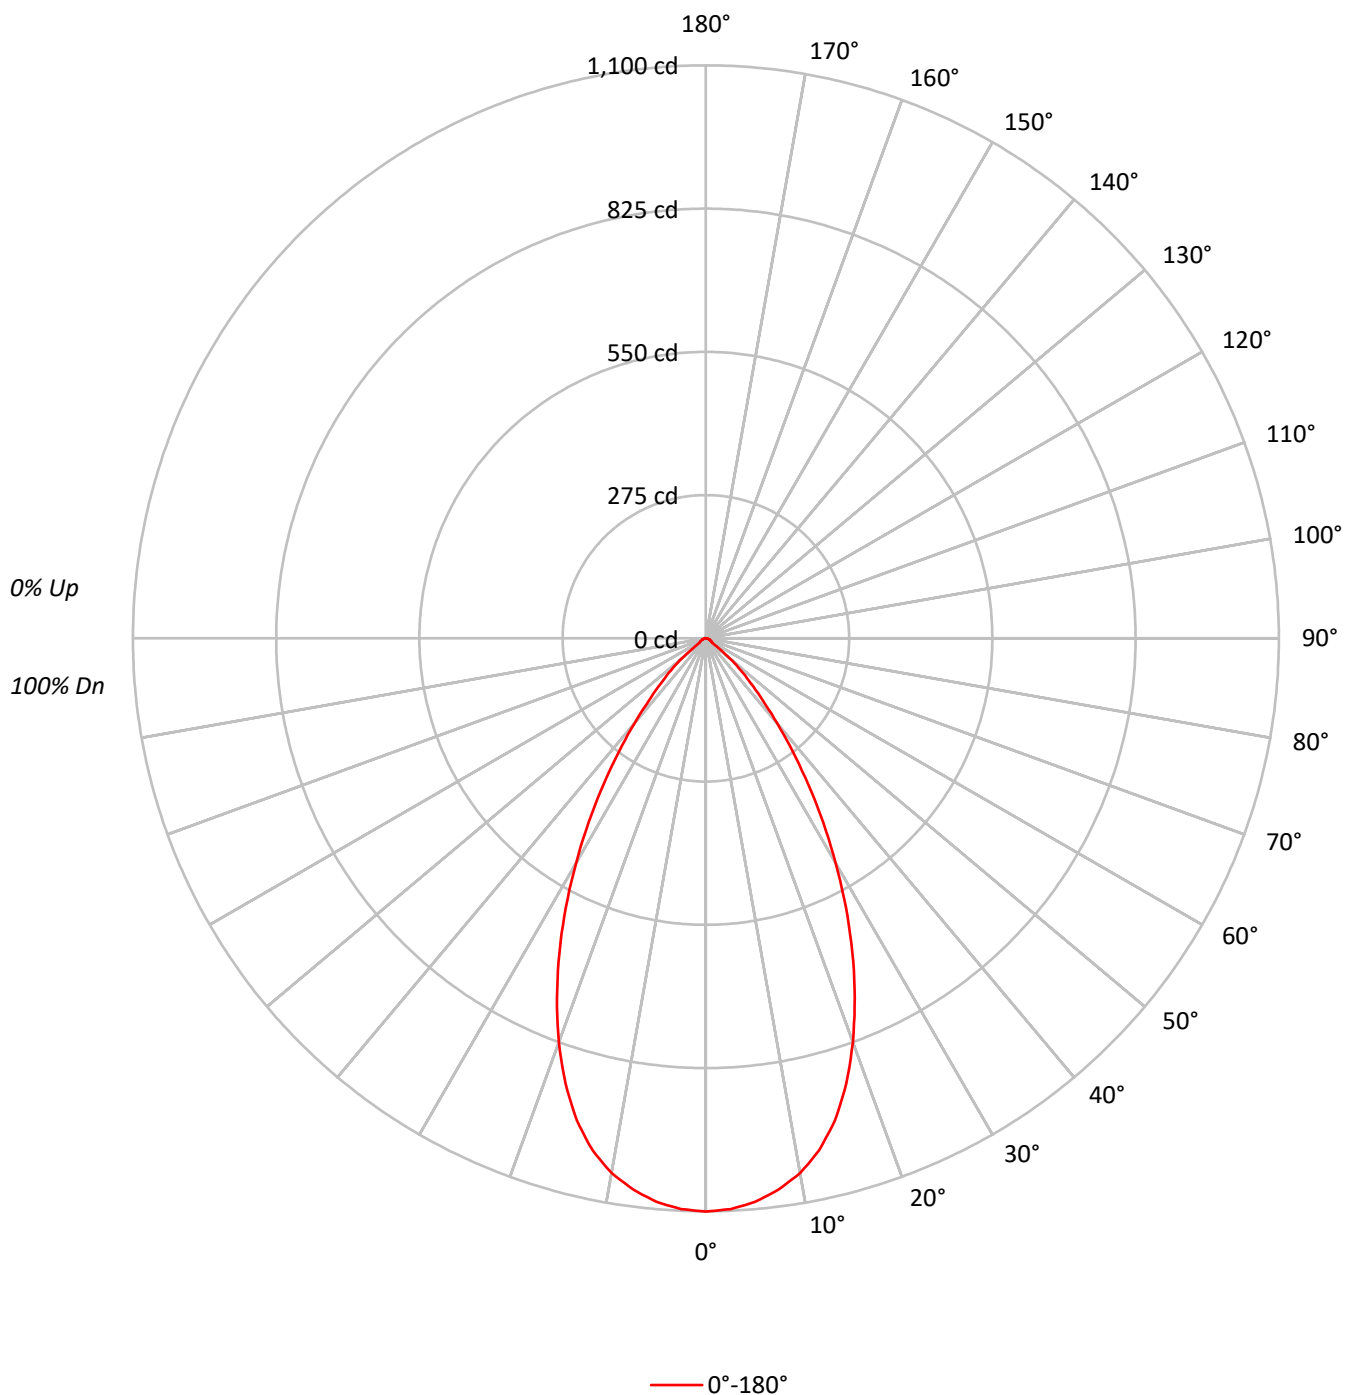

TEST NUMBER: P1252134

CATALOG NUMBER: P3AS13R609030DE010 E3DL1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	84	91	86	83		88	85	82		86
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81
5	91	82	76	71	89	81	75	71	79	74	70		78	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	65	61		69	64	60		68
8	77	68	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	60	54	50	59	53	50		58	53	50		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	241318
5°	239048
10°	232082
15°	217436
20°	192447
25°	160993
30°	126171
35°	91524
40°	60886
45°	37957
50°	20537
55°	5926
60°	5526
65°	5033
70°	5001
75°	4914
80°	4925
85°	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 37957 cd/sqm

TEST NUMBER: P1252134

CATALOG NUMBER: P3AS13R609030DE010 E3DL1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.3	10.0
10°-20°	265.7	26.0
20°-30°	302.9	29.6
30°-40°	214.8	21.0
40°-50°	97.4	9.5
50°-60°	20.7	2.0
60°-70°	10.0	1.0
70°-80°	6.2	0.6
80°-90°	2.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	670.9	65.6
0°-40°	885.6	86.7
0°-60°	1003.8	98.2
0°-90°	1022.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1022.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1100	
5°	1086	102
15°	958	266
25°	665	303
35°	342	215
45°	122	97
55°	16	21
65°	10	10
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1252134

CATALOG NUMBER: P3AS13R609030DE010 E3DL1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1100.5
2.5°	1096.7
5°	1086.0
7.5°	1067.5
10°	1042.3
12.5°	1006.3
15°	957.8
17.5°	896.6
20°	824.7
22.5°	747.0
25°	665.4
27.5°	581.8
30°	498.3
32.5°	418.7
35°	341.9
37.5°	273.9
40°	212.7
42.5°	161.2
45°	122.4
47.5°	91.3
50°	60.2
52.5°	28.2
55°	15.5
57.5°	13.6
60°	12.6
62.5°	11.7
65°	9.7
67.5°	8.7
70°	7.8
72.5°	6.8
75°	5.8
77.5°	4.9
80°	3.9
82.5°	2.9
85°	1.9
87.5°	1.0
90°	0.0

(END OF REPORT)