

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252166

Luminaire Tested: P3AS13R659030DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252166
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-43)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R659030DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 3000K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 975.0 lumens
Efficiency: N/A
Efficacy: 66.8 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252166

CATALOG NUMBER: P3AS13R659030DE010 E3DL1WMH

Luminous Intensity Polar Plot

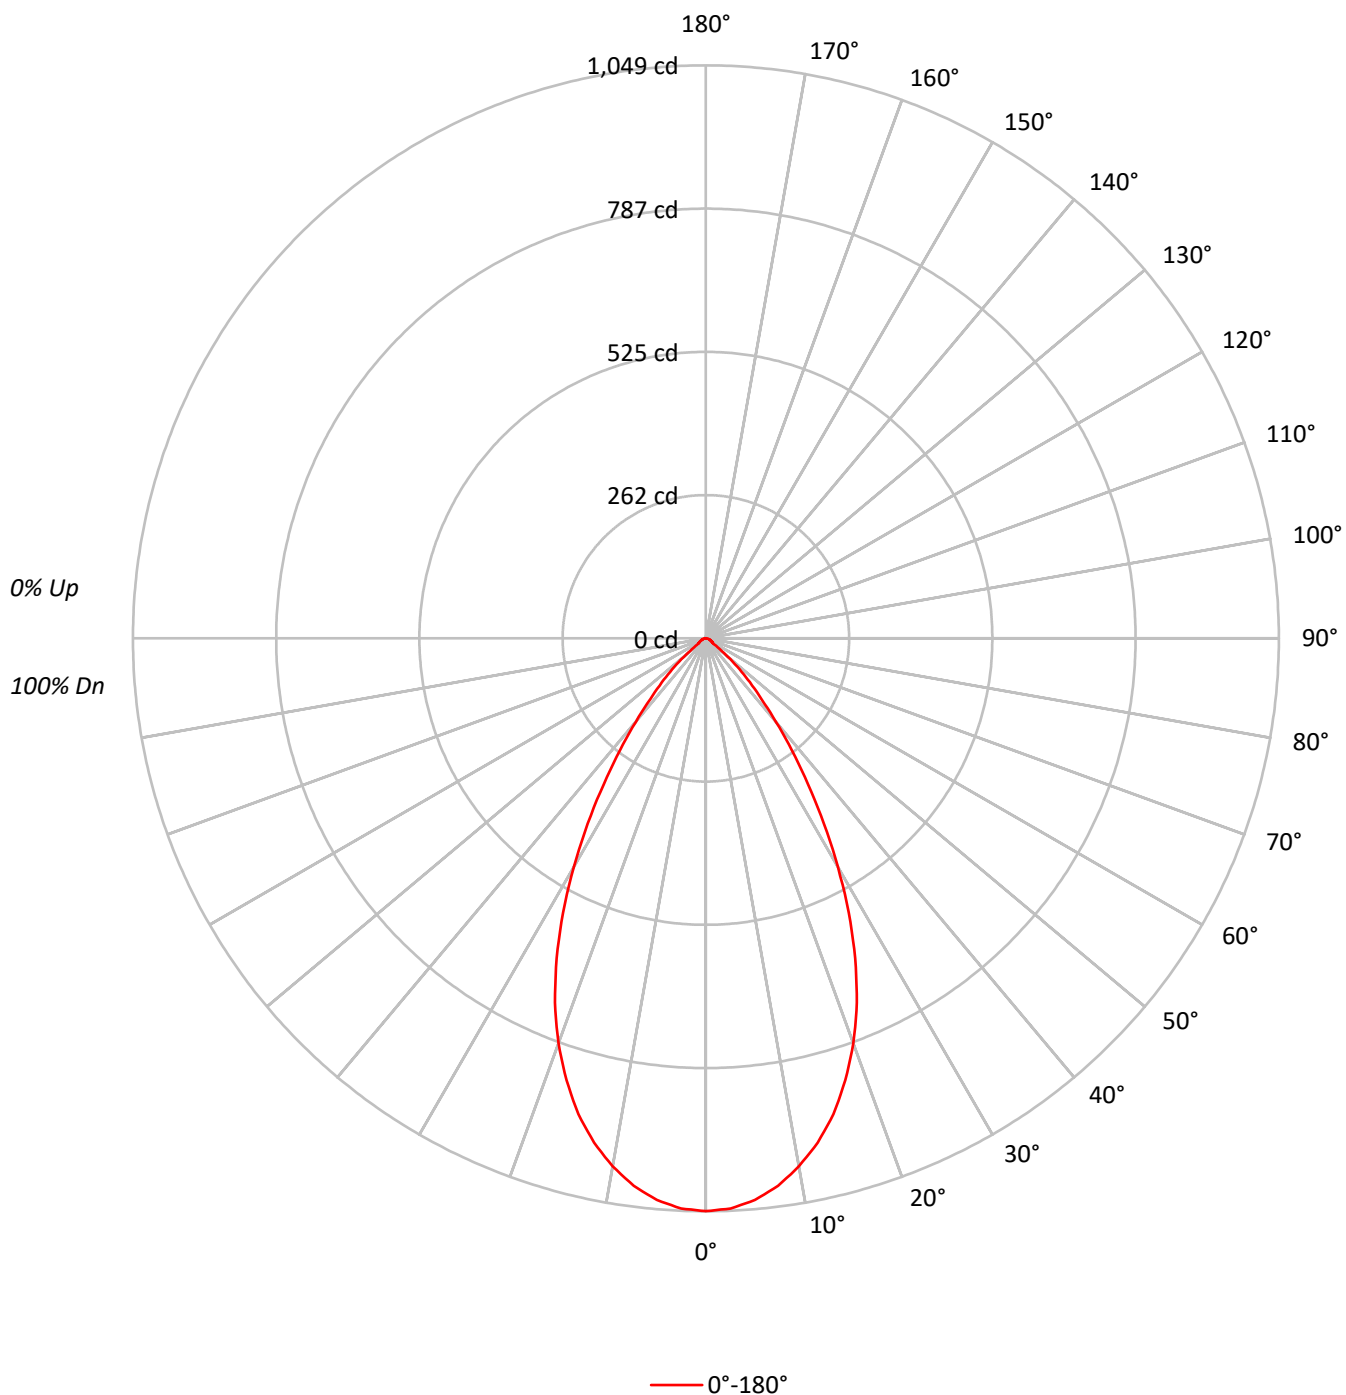

TEST NUMBER: P1252166

CATALOG NUMBER: P3AS13R659030DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	95	89	85	99	93	88	84	90	86	83		88	85	82		86
4	96	88	82	78	94	87	81	77	85	80	76		83	79	75		81
5	91	82	76	71	89	81	75	71	79	74	70		77	73	70		76
6	86	77	70	66	84	76	70	66	74	69	65		73	68	65		72
7	82	72	66	61	80	71	65	61	70	64	61		69	64	60		67
8	77	67	61	57	76	67	61	57	66	60	57		65	60	56		64
9	74	64	57	53	72	63	57	53	62	57	53		61	56	53		60
10	70	60	54	50	69	59	54	50	59	53	50		58	53	50		57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	229938
5°	227184
10°	218544
15°	204723
20°	184139
25°	156372
30°	122297
35°	87161
40°	57021
45°	35259
50°	17910
55°	6308
60°	5526
65°	5552
70°	5001
75°	4914
80°	4925
85°	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 35259 cd/sqm

TEST NUMBER: P1252166

CATALOG NUMBER: P3AS13R659030DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.9	9.9
10°-20°	251.0	25.7
20°-30°	293.3	30.1
30°-40°	205.0	21.0
40°-50°	90.2	9.3
50°-60°	20.1	2.1
60°-70°	10.2	1.0
70°-80°	6.2	0.6
80°-90°	2.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	641.2	65.8
0°-40°	846.2	86.8
0°-60°	956.5	98.1
0°-90°	975.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	975.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1049	
5°	1032	97
15°	902	251
25°	646	293
35°	326	205
45°	114	90
55°	16	20
65°	11	10
75°	6	6
85°	2	2
90°	0	

TEST NUMBER: P1252166

CATALOG NUMBER: P3AS13R659030DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1048.6
2.5°	1044.7
5°	1032.1
7.5°	1010.7
10°	981.5
12.5°	945.6
15°	901.8
17.5°	848.4
20°	789.1
22.5°	722.1
25°	646.3
27.5°	566.6
30°	483.0
32.5°	402.3
35°	325.6
37.5°	258.5
40°	199.2
42.5°	150.6
45°	113.7
47.5°	83.6
50°	52.5
52.5°	27.2
55°	16.5
57.5°	14.6
60°	12.6
62.5°	11.7
65°	10.7
67.5°	8.7
70°	7.8
72.5°	6.8
75°	5.8
77.5°	4.9
80°	3.9
82.5°	2.9
85°	1.9
87.5°	1.0
90°	0.0

(END OF REPORT)