

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252242

Luminaire Tested: P3AS17R159030DE010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252242
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R159030DE010 E3D1LI
Description: 3in Adjustable LED luminaire with, R15 optic, 3000K CCT AND, 90CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1664.0 lumens
Efficiency: N/A
Efficacy: 78.5 lumens/watt
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252242

CATALOG NUMBER: P3AS17R159030DE010 E3D1LI

Luminous Intensity Polar Plot

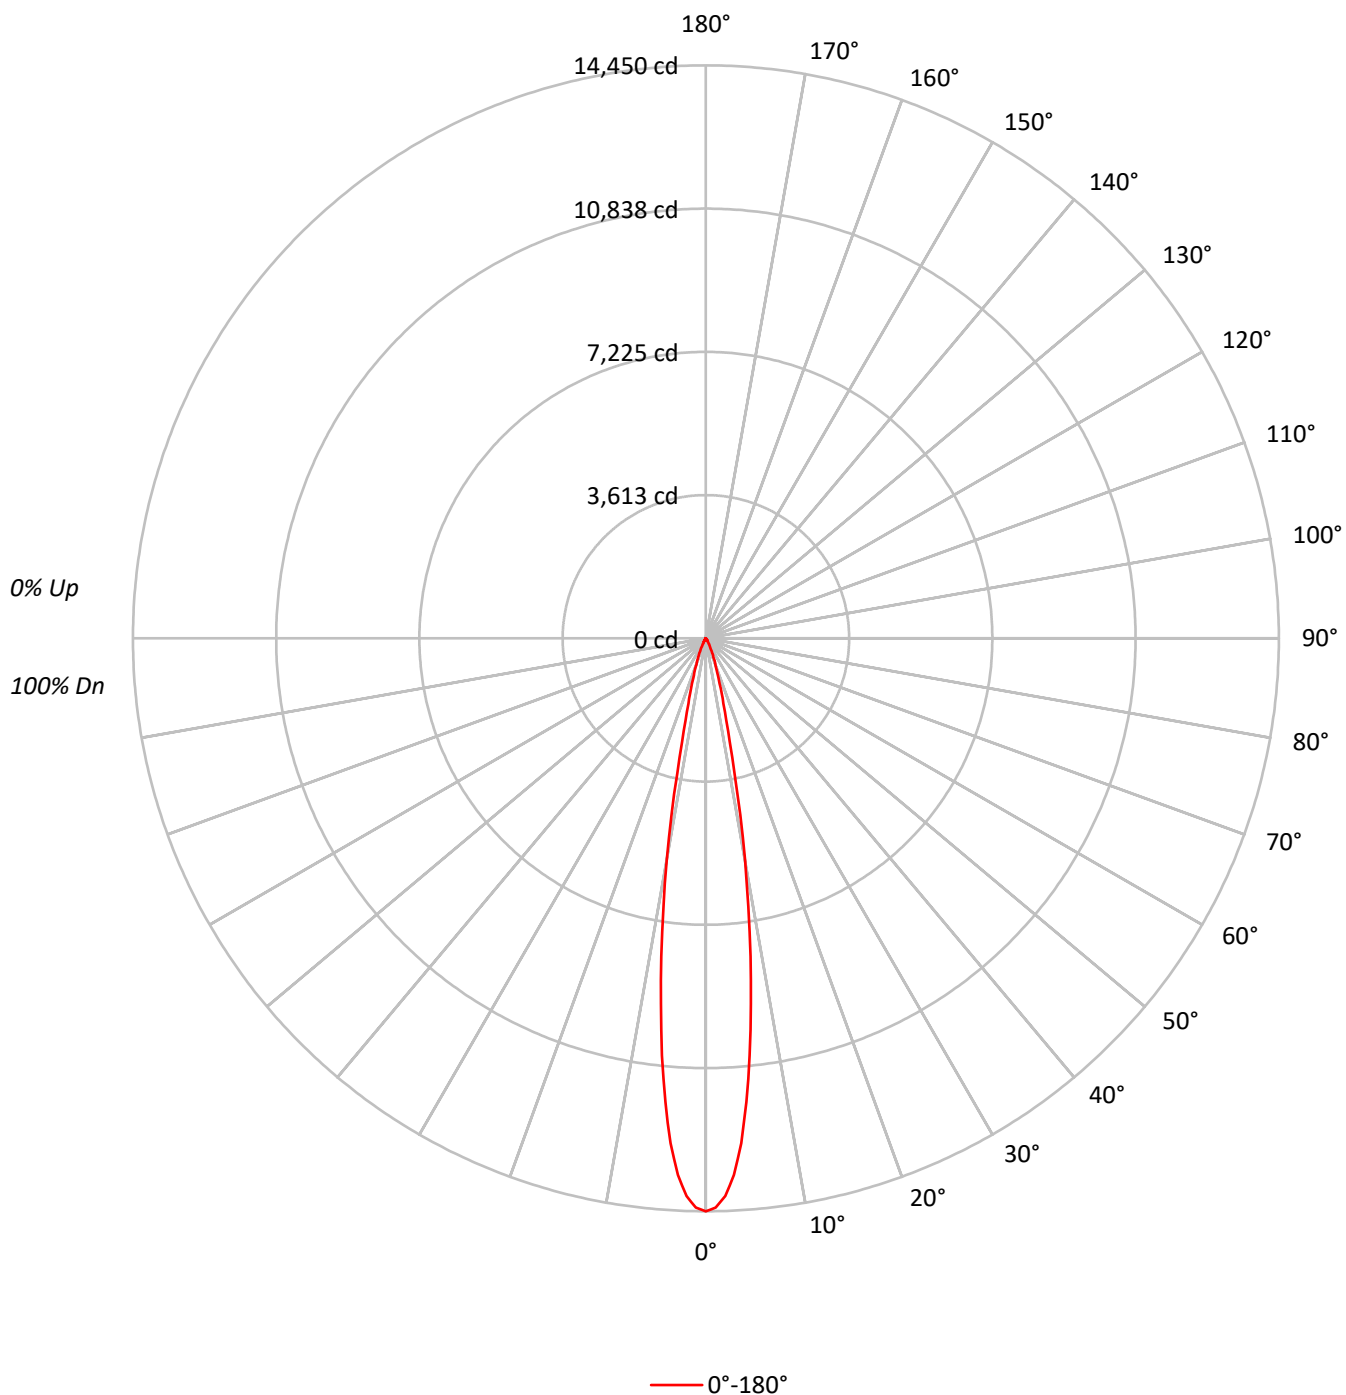

TEST NUMBER: P1252242

CATALOG NUMBER: P3AS17R159030DE010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	116	114	112	111	113	112	110	109	108	107	105	104	103	102	101	100	99	98		
2	112	109	107	105	110	108	105	103	105	103	101	102	100	99	99	98	97	96		
3	110	106	102	100	108	104	102	99	102	100	98	100	98	96	98	96	95	94		
4	107	102	99	96	106	101	98	96	99	97	95	98	96	94	96	94	93	92		
5	105	100	96	94	103	99	96	93	97	94	92	96	93	92	94	93	91	90		
6	102	97	94	91	101	96	93	91	95	92	90	94	92	90	93	91	89	88		
7	100	95	91	89	99	94	91	89	93	90	88	92	90	88	91	89	88	87		
8	98	93	89	87	97	92	89	87	91	89	87	91	88	86	90	88	86	85		
9	96	91	88	85	96	91	87	85	90	87	85	89	87	85	89	86	85	84		
10	95	89	86	84	94	89	86	84	88	85	83	88	85	83	87	85	83	82		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	3168693
5°	2583859
10°	1265419
15°	387312
20°	164024
25°	74182
30°	28916
35°	13331
40°	4151
45°	1551
50°	648
55°	229
60°	263
65°	311
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1551 cd/sqm

TEST NUMBER: P1252242

CATALOG NUMBER: P3AS17R159030DE010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	913.7	54.9
10°-20°	560.7	33.7
20°-30°	150.6	9.0
30°-40°	33.2	2.0
40°-50°	4.6	0.3
50°-60°	0.8	0.0
60°-70°	0.4	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1625.0	97.7
0°-40°	1658.1	99.6
0°-60°	1663.6	100.0
0°-90°	1664.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1664.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14450	
5°	11738	914
15°	1706	561
25°	307	151
35°	50	33
45°	5	5
55°	1	1
65°	1	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1252242

CATALOG NUMBER: P3AS17R159030DE010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	14450.4
1°	14360.1
2°	14070.5
3°	13548.7
4°	12763.2
5°	11738.5
6°	10579.4
7°	9288.4
8°	8102.2
9°	6844.7
10°	5683.1
11°	4533.5
12°	3488.0
13°	2682.9
14°	2123.8
15°	1706.1
17.5°	1057.5
20°	702.9
22.5°	473.2
25°	306.6
27.5°	181.7
30°	114.2
32.5°	77.0
35°	49.8
37.5°	27.8
40°	14.5
42.5°	8.2
45°	5.0
47.5°	3.2
50°	1.9
52.5°	1.3
55°	0.6
57.5°	0.6
60°	0.6
62.5°	0.6
65°	0.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1252242

CATALOG NUMBER: P3AS17R159030DE010 E3D1LI

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)