

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252384

Luminaire Tested: P3AS17R359030DE010 E3PHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252384
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2510-583-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R359030DE010 E3PHLP1MW
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 846.0 lumens
Efficiency: N/A
Efficacy: 39.9 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.68 / 0.73
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252384

CATALOG NUMBER: P3AS17R359030DE010 E3PHLP1MW

Luminous Intensity Polar Plot

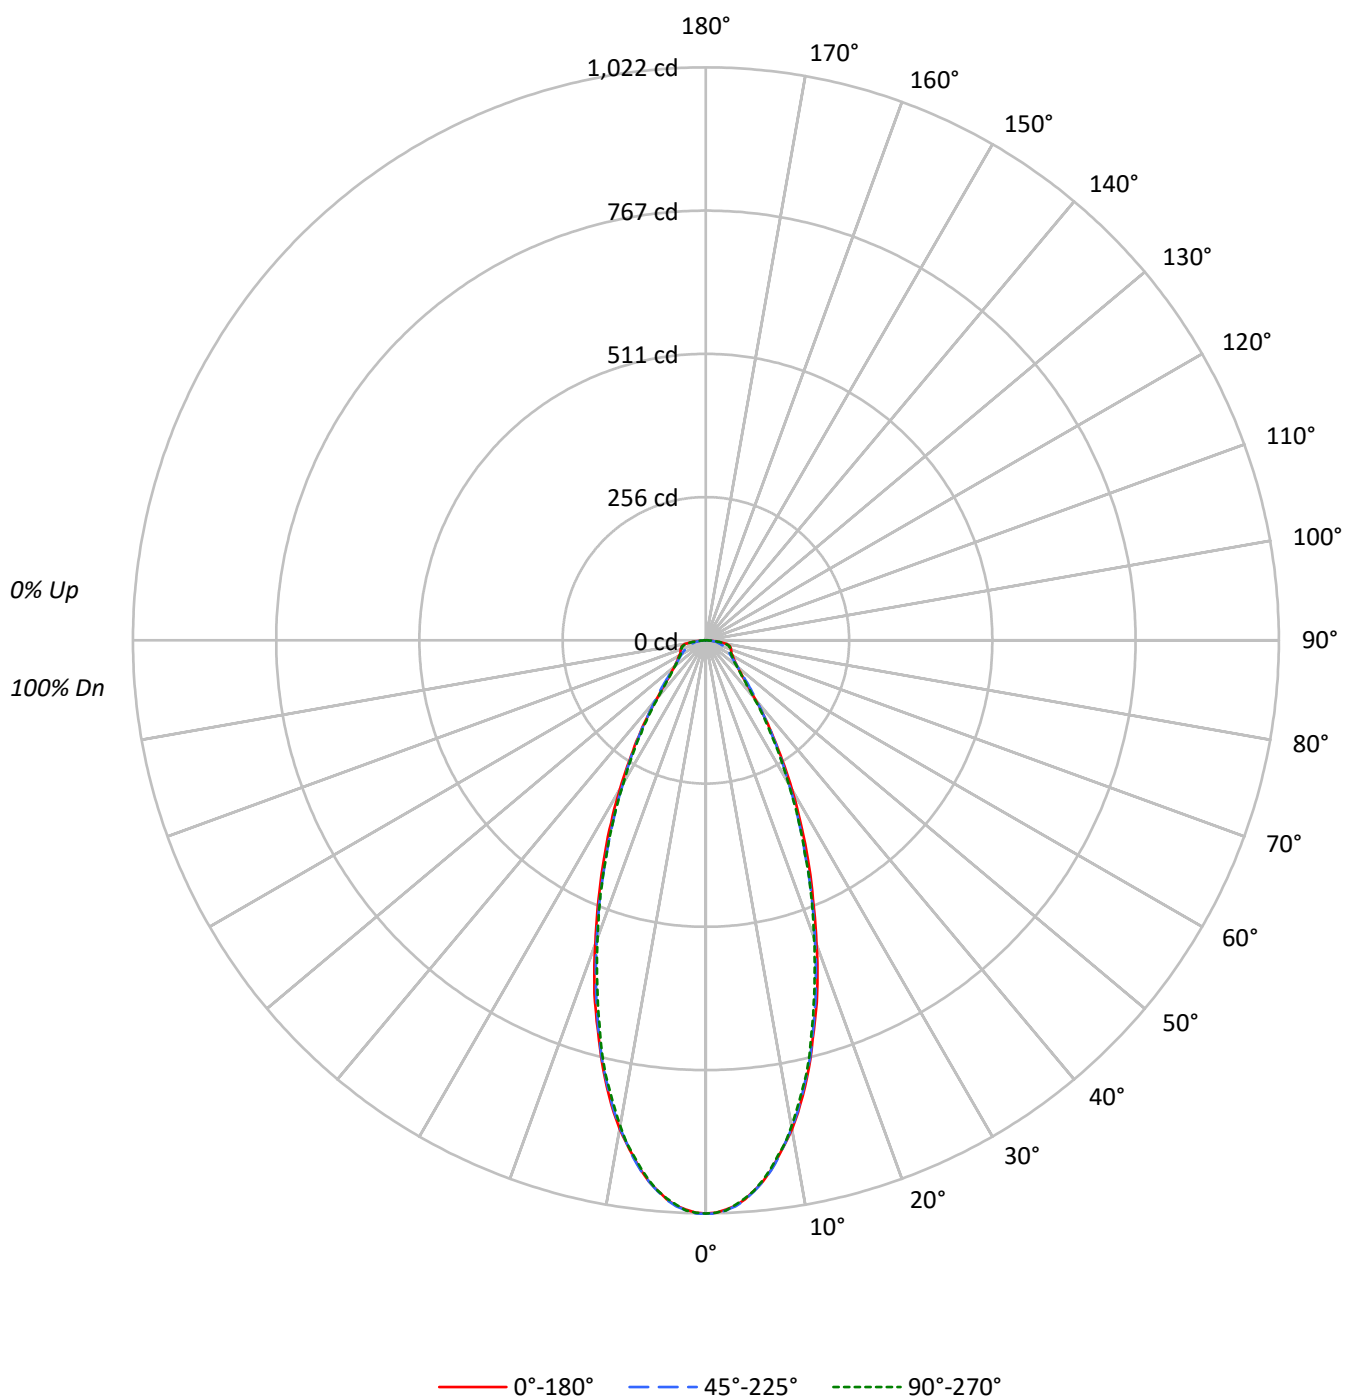

TEST NUMBER: P1252384

CATALOG NUMBER: P3AS17R359030DE010 E3PHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	111	107	104	101	109	105	102	99	101	99	96		97	95	93		94
2	104	98	92	88	101	96	91	87	92	88	85		89	86	83		86
3	97	89	83	78	95	88	82	77	85	80	76		82	78	75		80
4	92	82	75	70	90	81	75	70	79	73	69		77	72	68		75
5	86	76	69	64	84	75	69	64	73	68	63		72	67	63		70
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	60	55	76	66	59	54	64	58	54		63	58	54		62
8	73	62	56	51	72	62	55	51	61	55	51		60	54	50		59
9	70	59	52	48	68	58	52	48	57	52	47		56	51	47		55
10	66	56	49	45	65	55	49	45	54	49	45		53	48	45		53

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	224214	224214	224214
5°	216861	217147	216861
10°	196990	196701	195855
15°	167220	166630	165177
20°	134622	132825	131635
25°	104062	100941	100941
30°	77607	74999	74341
35°	55841	55145	53779
40°	39073	40190	37613
45°	29150	30763	28344
50°	25040	25040	24596
55°	23626	22632	23129
60°	24296	22016	23156
65°	26047	22052	25372
70°	30518	23145	29749
75°	38210	23977	37109
80°	48744	26013	43945
85°	38997	25914	38997

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 80°

Luminance: 48744 cd/sqm

TEST NUMBER: P1252384

CATALOG NUMBER: P3AS17R359030DE010 E3PHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	90.8	10.7
10°-20°	202.7	24.0
20°-30°	193.5	22.9
30°-40°	130.0	15.4
40°-50°	76.3	9.0
50°-60°	54.6	6.5
60°-70°	45.4	5.4
70°-80°	37.2	4.4
80°-90°	15.3	1.8
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	487.0	57.6
0°-40°	617.0	72.9
0°-60°	747.9	88.4
0°-90°	846.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	846.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1022	1022	1022	1022	1022	
5°	985	988	986	985	985	91
15°	737	738	734	729	728	204
25°	430	425	417	417	417	197
35°	209	209	206	202	201	132
45°	94	97	99	94	91	76
55°	62	60	59	59	60	56
65°	50	45	42	45	49	50
75°	45	35	28	35	44	47
85°	16	17	10	17	16	18
90°	0	0	0	0	0	

TEST NUMBER: P1252384

CATALOG NUMBER: P3AS17R359030DE010 E3PHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1022.5	1022.5	1022.5	1022.5	1022.5
1°	1021.2	1022.5	1022.5	1021.2	1021.2
2°	1016.1	1018.7	1017.4	1016.1	1017.4
3°	1009.6	1012.2	1010.9	1009.6	1008.4
4°	999.3	1001.9	1000.6	998.0	998.0
5°	985.2	987.7	986.5	985.2	985.2
6°	971.0	973.6	971.0	968.4	968.4
7°	951.7	955.6	953.0	950.4	949.1
8°	929.8	933.7	931.1	929.8	927.2
9°	907.9	910.5	906.6	906.6	906.6
10°	884.7	886.0	883.4	879.6	879.6
11°	859.0	857.7	856.4	853.8	851.2
12°	830.6	830.6	826.8	824.2	822.9
13°	801.0	799.7	797.2	794.6	794.6
14°	770.1	770.1	767.5	762.4	763.7
15°	736.6	737.9	734.0	728.9	727.6
17.5°	660.6	658.1	651.6	647.8	643.9
20°	576.9	575.6	569.2	565.3	564.1
22.5°	499.7	498.4	491.9	488.1	490.7
25°	430.1	425.0	417.2	417.2	417.2
27.5°	365.7	359.3	354.1	351.6	354.1
30°	306.5	301.3	296.2	294.9	293.6
32.5°	253.7	251.1	248.5	244.7	244.7
35°	208.6	208.6	206.0	202.2	200.9
37.5°	170.0	171.3	170.0	166.1	164.8
40°	136.5	139.1	140.4	136.5	131.4
42.5°	112.0	115.9	118.5	112.0	108.2
45°	94.0	96.6	99.2	94.0	91.4
47.5°	82.4	83.7	85.0	81.1	79.8
50°	73.4	73.4	73.4	72.1	72.1
52.5°	67.0	67.0	65.7	64.4	64.4
55°	61.8	60.5	59.2	59.2	60.5
57.5°	58.0	56.7	54.1	55.4	56.7
60°	55.4	52.8	50.2	51.5	52.8
62.5°	51.5	48.9	46.4	47.6	50.2
65°	50.2	45.1	42.5	45.1	48.9
67.5°	48.9	42.5	38.6	42.5	47.6
70°	47.6	39.9	36.1	39.9	46.4
72.5°	46.4	37.3	32.2	37.3	45.1
75°	45.1	34.8	28.3	34.8	43.8
77.5°	42.5	32.2	24.5	32.2	39.9
80°	38.6	29.6	20.6	28.3	34.8
82.5°	28.3	24.5	16.7	24.5	25.8
85°	15.5	16.7	10.3	16.7	15.5
87.5°	1.3	2.6	2.6	7.7	5.2



TEST NUMBER: P1252384
CATALOG NUMBER: P3AS17R359030DE010 E3PHLP1MW

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
90°	0.0	0.0	0.0	0.0	0.0

(END OF REPORT)