

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252407

Luminaire Tested: P3AS17R409030DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252407
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-22)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R409030DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R40 optic, 3000K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1150.1 lumens
Efficiency: N/A
Efficacy: 54.2 lumens/watt
Spacing Criteria (0/90/45): 0.83 / 0.83 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252407

CATALOG NUMBER: P3AS17R409030DE010 E3DLD1WMH

Luminous Intensity Polar Plot

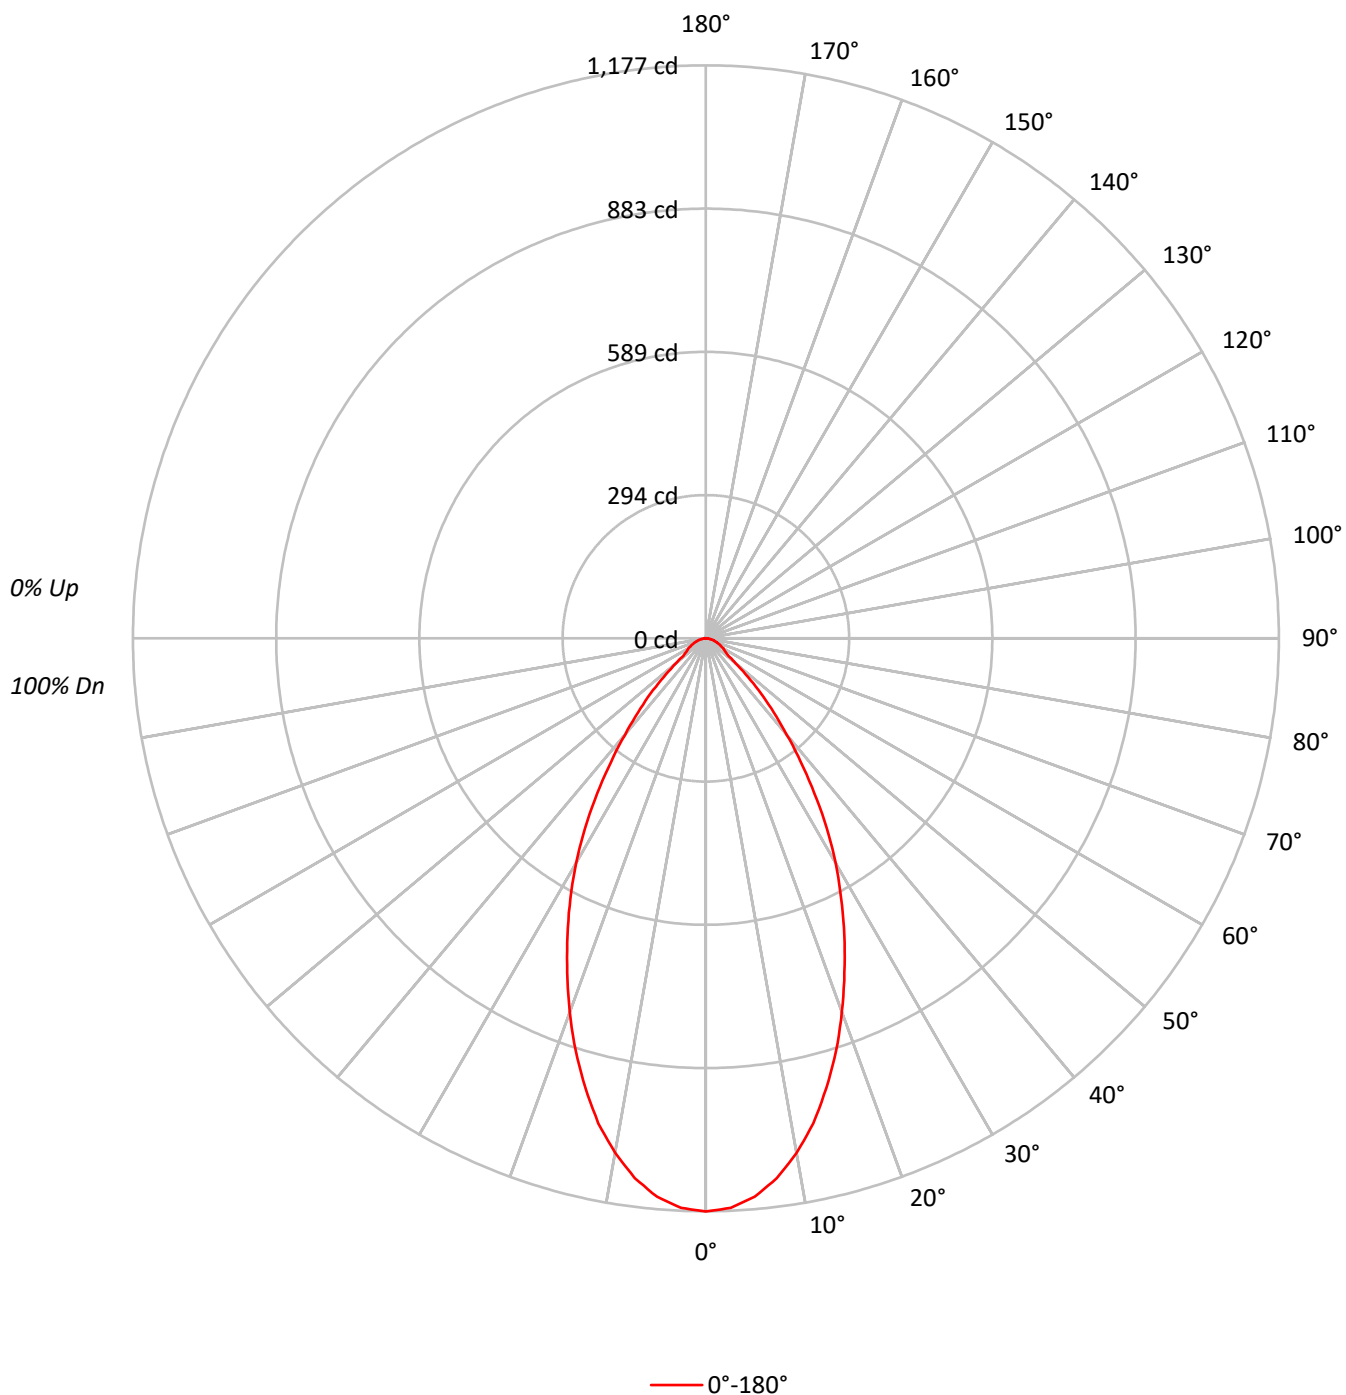

TEST NUMBER: P1252407

CATALOG NUMBER: P3AS17R409030DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	104	102	103	101	99		99	98	96		96
2	106	100	96	92	104	98	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	81	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	75	72		78
5	89	79	73	68	87	78	72	67	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	61		70	65	61		68
7	79	69	62	57	78	68	62	57	67	61	57		65	60	57		64
8	75	64	58	53	74	64	57	53	63	57	53		62	56	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	51	46	66	56	50	46	56	50	46		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	258159
5°	253466
10°	238918
15°	217027
20°	190650
25°	162808
30°	134882
35°	104025
40°	74024
45°	49866
50°	27223
55°	19192
60°	18069
65°	16707
70°	14874
75°	14149
80°	11365
85°	9812

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 49866 cd/sqm

TEST NUMBER: P1252407

CATALOG NUMBER: P3AS17R409030DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.4	9.3
10°-20°	266.3	23.2
20°-30°	307.8	26.8
30°-40°	242.6	21.1
40°-50°	124.5	10.8
50°-60°	47.6	4.1
60°-70°	31.5	2.7
70°-80°	17.1	1.5
80°-90°	5.1	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	681.5	59.3
0°-40°	924.2	80.4
0°-60°	1096.3	95.3
0°-90°	1150.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1150.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1177	
5°	1152	107
15°	956	266
25°	673	308
35°	389	243
45°	161	125
55°	50	48
65°	32	32
75°	17	17
85°	4	5
90°	0	

TEST NUMBER: P1252407

CATALOG NUMBER: P3AS17R409030DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1177.3
2.5°	1170.8
5°	1151.5
7.5°	1118.1
10°	1073.0
12.5°	1020.3
15°	956.0
17.5°	889.1
20°	817.0
22.5°	743.7
25°	672.9
27.5°	602.1
30°	532.7
32.5°	461.9
35°	388.6
37.5°	320.4
40°	258.6
42.5°	205.9
45°	160.8
47.5°	117.1
50°	79.8
52.5°	57.9
55°	50.2
57.5°	45.0
60°	41.2
62.5°	36.0
65°	32.2
67.5°	27.0
70°	23.2
72.5°	19.3
75°	16.7
77.5°	12.9
80°	9.0
82.5°	7.7
85°	3.9
87.5°	2.6
90°	0.0

(END OF REPORT)