

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252421

Luminaire Tested: P3AS17R459030DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252421
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-27)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R459030DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R45 optic, 3000K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 705.0 lumens
Efficiency: N/A
Efficacy: 33.3 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.69
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252421
CATALOG NUMBER: P3AS17R459030DE010 E3DL1GPH

Luminous Intensity Polar Plot

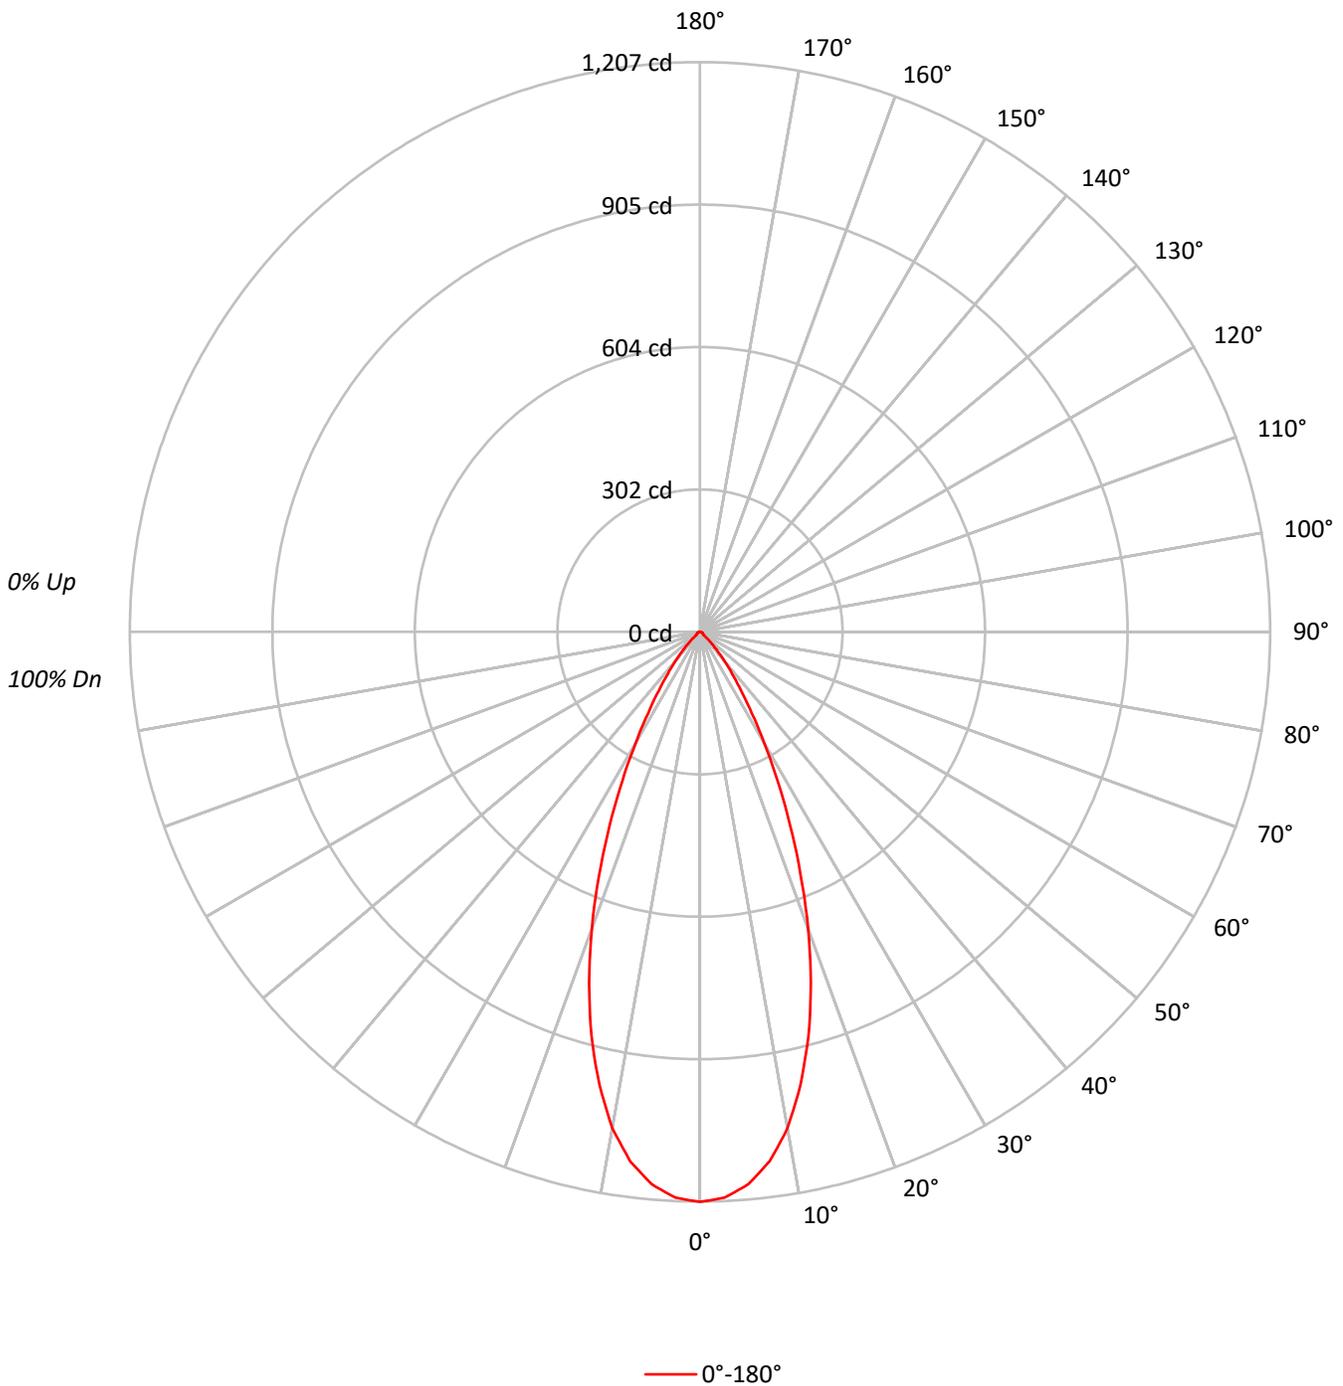



TEST NUMBER: P1252421

CATALOG NUMBER: P3AS17R459030DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94				94
2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	91	90	88				88
3	104	98	93	89	102	96	92	88	94	90	87	91	88	86	89	86	84	83				83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78				78
5	94	87	81	77	93	86	81	77	84	80	76	82	79	76	81	78	75	74				74
6	90	82	77	73	89	81	76	72	80	75	72	78	74	71	77	74	71	70				70
7	86	78	72	68	85	77	72	68	76	71	68	75	71	67	74	70	67	66				66
8	83	74	68	65	82	73	68	65	72	68	64	71	67	64	70	67	64	62				62
9	79	70	65	61	78	70	65	61	69	64	61	68	64	61	67	63	61	59				59
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57				57

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	264759
5°	258551
10°	237671
15°	201386
20°	156254
25°	109216
30°	68795
35°	40502
40°	22929
45°	11133
50°	3855
55°	3135
60°	3026
65°	2958
70°	2821
75°	2711
80°	2399
85°	1510

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11133 cd/sqm



TEST NUMBER: P1252421
 CATALOG NUMBER: P3AS17R459030DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.7	15.4
10°-20°	243.6	34.6
20°-30°	206.9	29.3
30°-40°	98.7	14.0
40°-50°	29.7	4.2
50°-60°	7.5	1.1
60°-70°	5.6	0.8
70°-80°	3.3	0.5
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	559.2	79.3
0°-40°	657.9	93.3
0°-60°	695.1	98.6
0°-90°	705.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	705.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1207	
5°	1175	109
15°	887	244
25°	451	207
35°	151	99
45°	36	30
55°	8	8
65°	6	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1252421
CATALOG NUMBER: P3AS17R459030DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1207.4
2.5°	1199.8
5°	1174.6
7.5°	1131.1
10°	1067.4
12.5°	982.9
15°	887.1
17.5°	780.5
20°	669.6
22.5°	556.7
25°	451.4
27.5°	355.6
30°	271.7
32.5°	204.3
35°	151.3
37.5°	111.6
40°	80.1
42.5°	55.5
45°	35.9
47.5°	20.2
50°	11.3
52.5°	8.8
55°	8.2
57.5°	7.6
60°	6.9
62.5°	6.3
65°	5.7
67.5°	5.0
70°	4.4
72.5°	3.8
75°	3.2
77.5°	2.5
80°	1.9
82.5°	1.3
85°	0.6
87.5°	0.6
90°	0.0

(END OF REPORT)