

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252501

Luminaire Tested: P3AS17R609030DE010 E3CD1MMS

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1252501  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS17R609030DE010 E3CD1MMS  
Description: 3in Adjustable LED luminaire with, R60 optic, 3000K CCT AND, 90CRI , E3CD1MMS TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1664.0 lumens  
Efficiency: N/A  
Efficacy: 78.5 lumens/watt  
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 21.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1252501

CATALOG NUMBER: P3AS17R609030DE010 E3CD1MMS

### Luminous Intensity Polar Plot

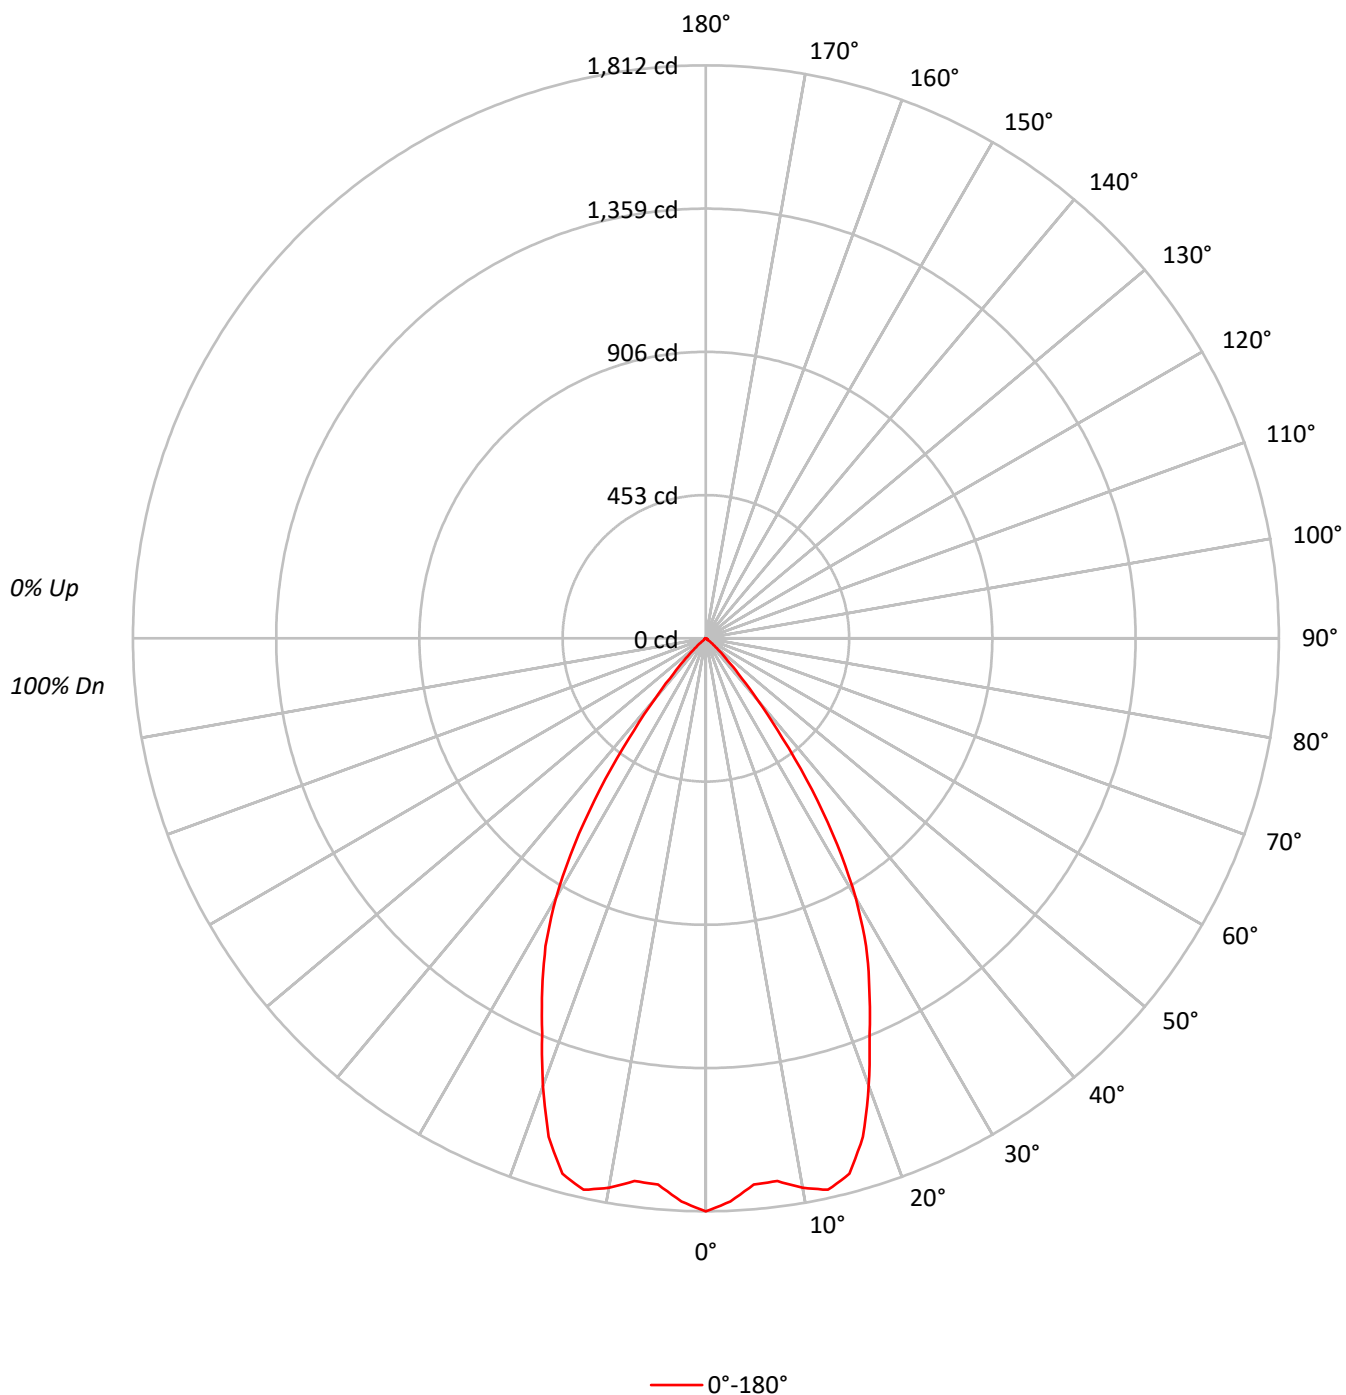

TEST NUMBER: P1252501

CATALOG NUMBER: P3AS17R609030DE010 E3CD1MMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     |  | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     |  | 70  |     |     |     |  | 50  |     |     |  |     | 30  |     |  |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 |  | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 114 | 111 | 108 | 106 |  | 111 | 109 | 106 | 104 |  | 105 | 103 | 101 |  | 101 | 100 | 98  |  | 97  | 96  | 95  |
| 2   | 108 | 103 | 99  | 96  |  | 106 | 102 | 98  | 95  |  | 98  | 95  | 93  |  | 95  | 93  | 91  |  | 93  | 91  | 89  |
| 3   | 103 | 96  | 91  | 88  |  | 101 | 95  | 90  | 87  |  | 92  | 89  | 85  |  | 90  | 87  | 84  |  | 88  | 85  | 83  |
| 4   | 98  | 90  | 85  | 81  |  | 96  | 89  | 84  | 80  |  | 87  | 83  | 79  |  | 85  | 81  | 78  |  | 83  | 80  | 77  |
| 5   | 93  | 84  | 79  | 74  |  | 91  | 84  | 78  | 74  |  | 82  | 77  | 73  |  | 80  | 76  | 73  |  | 79  | 75  | 72  |
| 6   | 88  | 79  | 73  | 69  |  | 87  | 79  | 73  | 69  |  | 77  | 72  | 68  |  | 76  | 71  | 68  |  | 74  | 70  | 68  |
| 7   | 84  | 75  | 69  | 64  |  | 82  | 74  | 68  | 64  |  | 73  | 68  | 64  |  | 71  | 67  | 64  |  | 70  | 66  | 63  |
| 8   | 80  | 70  | 64  | 60  |  | 78  | 70  | 64  | 60  |  | 69  | 64  | 60  |  | 68  | 63  | 60  |  | 67  | 62  | 59  |
| 9   | 76  | 66  | 61  | 57  |  | 75  | 66  | 60  | 56  |  | 65  | 60  | 56  |  | 64  | 59  | 56  |  | 63  | 59  | 56  |
| 10  | 72  | 63  | 57  | 53  |  | 71  | 62  | 57  | 53  |  | 62  | 56  | 53  |  | 61  | 56  | 53  |  | 60  | 56  | 53  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 397359 |
| 5°  | 381597 |
| 10° | 392890 |
| 15° | 397936 |
| 20° | 351384 |
| 25° | 296122 |
| 30° | 240164 |
| 35° | 156413 |
| 40° | 71849  |
| 45° | 27538  |
| 50° | 9211   |
| 55° | 2447   |
| 60° | 2237   |
| 65° | 2024   |
| 70° | 1667   |
| 75° | 2203   |
| 80° | 1642   |
| 85° | 3271   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 27538 cd/sqm

TEST NUMBER: P1252501

CATALOG NUMBER: P3AS17R609030DE010 E3CD1MMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 166.9  | 10.0      |
| 10°-20°   | 480.0  | 28.8      |
| 20°-30°   | 559.9  | 33.6      |
| 30°-40°   | 361.3  | 21.7      |
| 40°-50°   | 81.0   | 4.9       |
| 50°-60°   | 8.1    | 0.5       |
| 60°-70°   | 3.8    | 0.2       |
| 70°-80°   | 2.2    | 0.1       |
| 80°-90°   | 0.9    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 1206.8 | 72.5      |
| 0°-40°    | 1568.1 | 94.2      |
| 0°-60°    | 1657.1 | 99.6      |
| 0°-90°    | 1664.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1664.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1812 |      |
| 5°  | 1734 | 167  |
| 15° | 1753 | 480  |
| 25° | 1224 | 560  |
| 35° | 584  | 361  |
| 45° | 89   | 81   |
| 55° | 6    | 8    |
| 65° | 4    | 4    |
| 75° | 3    | 2    |
| 85° | 1    | 1    |
| 90° | 0    |      |

TEST NUMBER: P1252501

CATALOG NUMBER: P3AS17R609030DE010 E3CD1MMS

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 1812.1 |
| 2.5°  | 1782.5 |
| 5°    | 1733.6 |
| 7.5°  | 1731.0 |
| 10°   | 1764.5 |
| 12.5° | 1786.3 |
| 15°   | 1752.9 |
| 17.5° | 1652.5 |
| 20°   | 1505.8 |
| 22.5° | 1352.6 |
| 25°   | 1223.9 |
| 27.5° | 1097.8 |
| 30°   | 948.5  |
| 32.5° | 773.5  |
| 35°   | 584.3  |
| 37.5° | 399.0  |
| 40°   | 251.0  |
| 42.5° | 150.6  |
| 45°   | 88.8   |
| 47.5° | 51.5   |
| 50°   | 27.0   |
| 52.5° | 9.0    |
| 55°   | 6.4    |
| 57.5° | 5.1    |
| 60°   | 5.1    |
| 62.5° | 3.9    |
| 65°   | 3.9    |
| 67.5° | 3.9    |
| 70°   | 2.6    |
| 72.5° | 2.6    |
| 75°   | 2.6    |
| 77.5° | 1.3    |
| 80°   | 1.3    |
| 82.5° | 1.3    |
| 85°   | 1.3    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

(END OF REPORT)