

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252556

Luminaire Tested: P3AS17R709030DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252556
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-48)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R709030DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R70 optic, 3000K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1610.0 lumens
Efficiency: N/A
Efficacy: 75.9 lumens/watt
Spacing Criteria (0/90/45): 1.01 / 1.01 / 1.03
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252556

CATALOG NUMBER: P3AS17R709030DE010 E3CB1MMS

Luminous Intensity Polar Plot

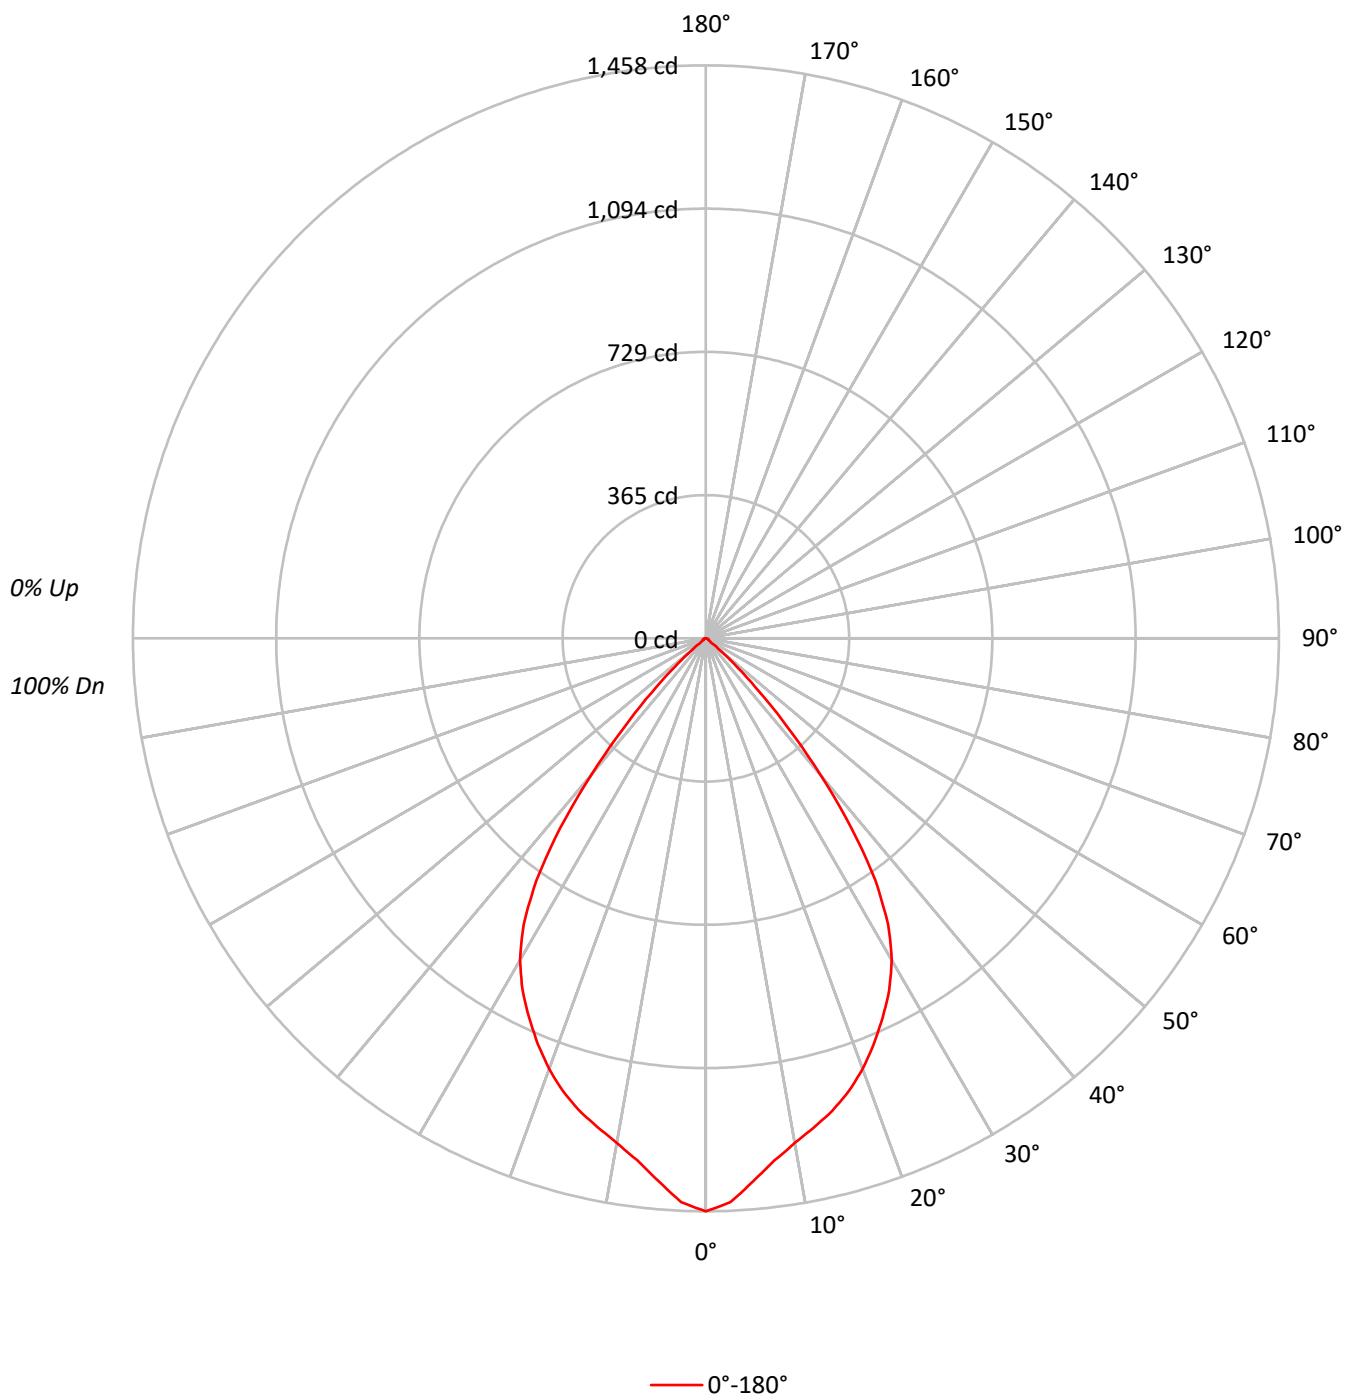

TEST NUMBER: P1252556

CATALOG NUMBER: P3AS17R709030DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	111	108	106	103	104	102	100		100	99	97		97
2	107	102	97	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		85
4	95	87	81	77	94	86	81	76	84	79	75		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	64	59	68	63	59		67	62	59		66
8	76	66	59	55	75	65	59	55	64	58	55		63	58	54		62
9	72	62	55	51	71	61	55	51	60	55	51		59	54	50		58
10	68	58	52	47	67	57	51	47	56	51	47		56	51	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	319711
5°	305062
10°	290242
15°	282476
20°	272067
25°	257483
30°	239480
35°	201171
40°	129672
45°	60254
50°	15795
55°	3938
60°	3947
65°	3321
70°	3270
75°	3304
80°	3283
85°	3271

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 60254 cd/sqm

TEST NUMBER: P1252556

CATALOG NUMBER: P3AS17R709030DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.7	8.1
10°-20°	349.6	21.7
20°-30°	488.5	30.3
30°-40°	453.0	28.1
40°-50°	162.4	10.1
50°-60°	13.7	0.9
60°-70°	6.8	0.4
70°-80°	4.4	0.3
80°-90°	1.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	967.9	60.1
0°-40°	1420.9	88.3
0°-60°	1597.0	99.2
0°-90°	1610.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1610.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1458	
5°	1386	130
15°	1244	350
25°	1064	489
35°	752	453
45°	194	162
55°	10	14
65°	6	7
75°	4	4
85°	1	2
90°	0	

TEST NUMBER: P1252556

CATALOG NUMBER: P3AS17R709030DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	1458.0
2.5°	1436.1
5°	1385.9
7.5°	1339.6
10°	1303.5
12.5°	1273.9
15°	1244.3
17.5°	1208.3
20°	1165.9
22.5°	1117.0
25°	1064.2
27.5°	1010.1
30°	945.8
32.5°	863.5
35°	751.5
37.5°	608.7
40°	453.0
42.5°	308.8
45°	194.3
47.5°	108.1
50°	46.3
52.5°	15.4
55°	10.3
57.5°	9.0
60°	9.0
62.5°	7.7
65°	6.4
67.5°	6.4
70°	5.1
72.5°	5.1
75°	3.9
77.5°	3.9
80°	2.6
82.5°	2.6
85°	1.3
87.5°	1.3
90°	0.0

(END OF REPORT)