

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252655

Luminaire Tested: P3AS20R259030D010 E3DLD1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252655
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259030D010 E3DLD1GPH
Description: 3in Adjustable LED luminaire with, R25 optic, 3000K CCT AND, 90CRI , E3DLD1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 665.0 lumens
Efficiency: N/A
Efficacy: 23.1 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252655

CATALOG NUMBER: P3AS20R259030D010 E3DLD1GPH

Luminous Intensity Polar Plot

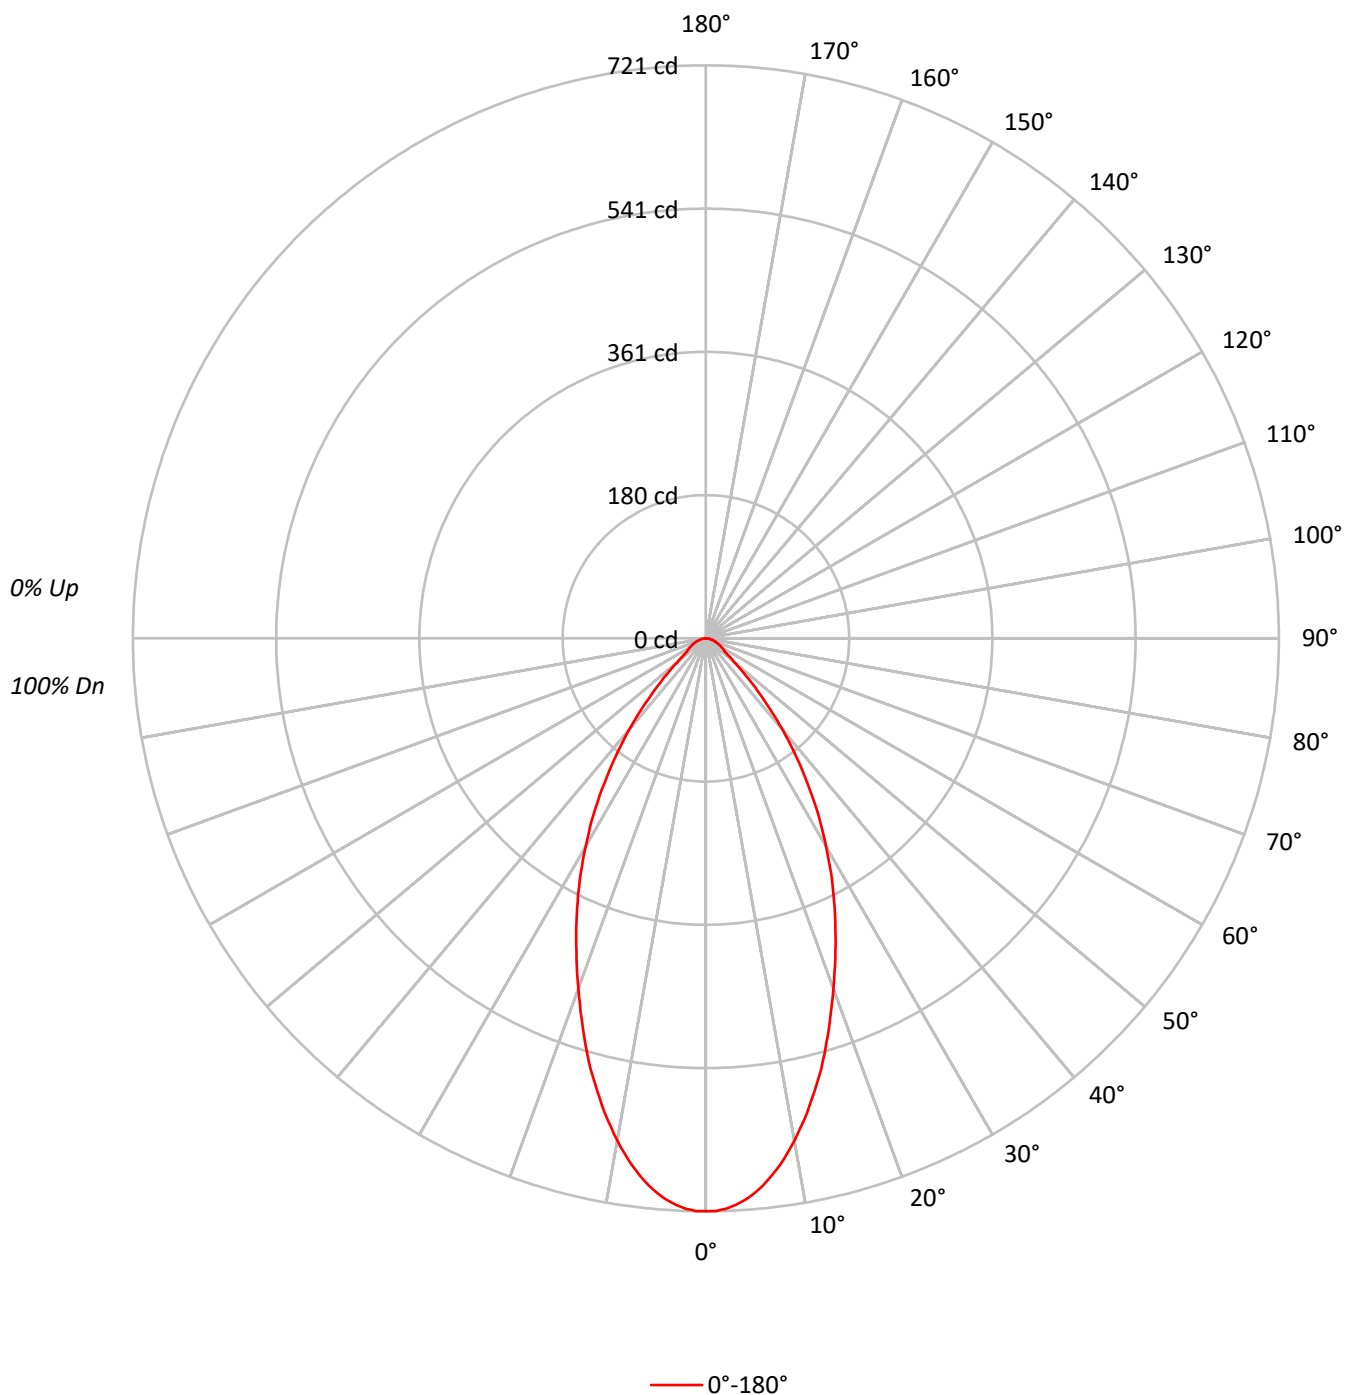

TEST NUMBER: P1252655

CATALOG NUMBER: P3AS20R259030D010 E3DLD1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	50		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	158058
5°	154281
10°	142950
15°	127333
20°	109420
25°	93005
30°	76569
35°	59669
40°	42909
45°	27228
50°	16102
55°	11087
60°	10175
65°	9443
70°	8527
75°	7710
80°	7324
85°	6290

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 27228 cd/sqm

TEST NUMBER: P1252655

CATALOG NUMBER: P3AS20R259030D010 E3DLD1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	65.0	9.8
10°-20°	155.7	23.4
20°-30°	175.9	26.5
30°-40°	139.2	20.9
40°-50°	70.3	10.6
50°-60°	28.1	4.2
60°-70°	18.0	2.7
70°-80°	10.0	1.5
80°-90°	2.8	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	396.6	59.6
0°-40°	535.8	80.6
0°-60°	634.2	95.4
0°-90°	665.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	665.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	721	
5°	701	65
15°	561	156
25°	384	176
35°	223	139
45°	88	70
55°	29	28
65°	18	18
75°	9	10
85°	2	3
90°	0	

TEST NUMBER: P1252655

CATALOG NUMBER: P3AS20R259030D010 E3DLD1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	720.8
1°	720.8
2°	718.3
3°	714.1
4°	708.3
5°	700.9
6°	691.8
7°	681.0
8°	669.4
9°	656.1
10°	642.0
11°	626.3
12°	611.4
13°	594.0
14°	577.4
15°	560.9
17.5°	514.5
20°	468.9
22.5°	425.8
25°	384.4
27.5°	343.8
30°	302.4
32.5°	263.4
35°	222.9
37.5°	185.6
40°	149.9
42.5°	116.8
45°	87.8
47.5°	65.4
50°	47.2
52.5°	35.6
55°	29.0
57.5°	26.5
60°	23.2
62.5°	20.7
65°	18.2
67.5°	15.7
70°	13.3
72.5°	11.6
75°	9.1
77.5°	7.5
80°	5.8
82.5°	4.1
85°	2.5
87.5°	0.8



TEST NUMBER: P1252655

CATALOG NUMBER: P3AS20R259030D010 E3DLD1GPH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)