

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252726

Luminaire Tested: P3AS20R359030D010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252726
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R359030D010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 3000K CCT AND, 90CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1096.0 lumens
Efficiency: N/A
Efficacy: 38.1 lumens/watt
Spacing Criteria (0/90/45): 0.69 / 0.69 / 0.72
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252726

CATALOG NUMBER: P3AS20R359030D010 E3DLP1WMH

Luminous Intensity Polar Plot

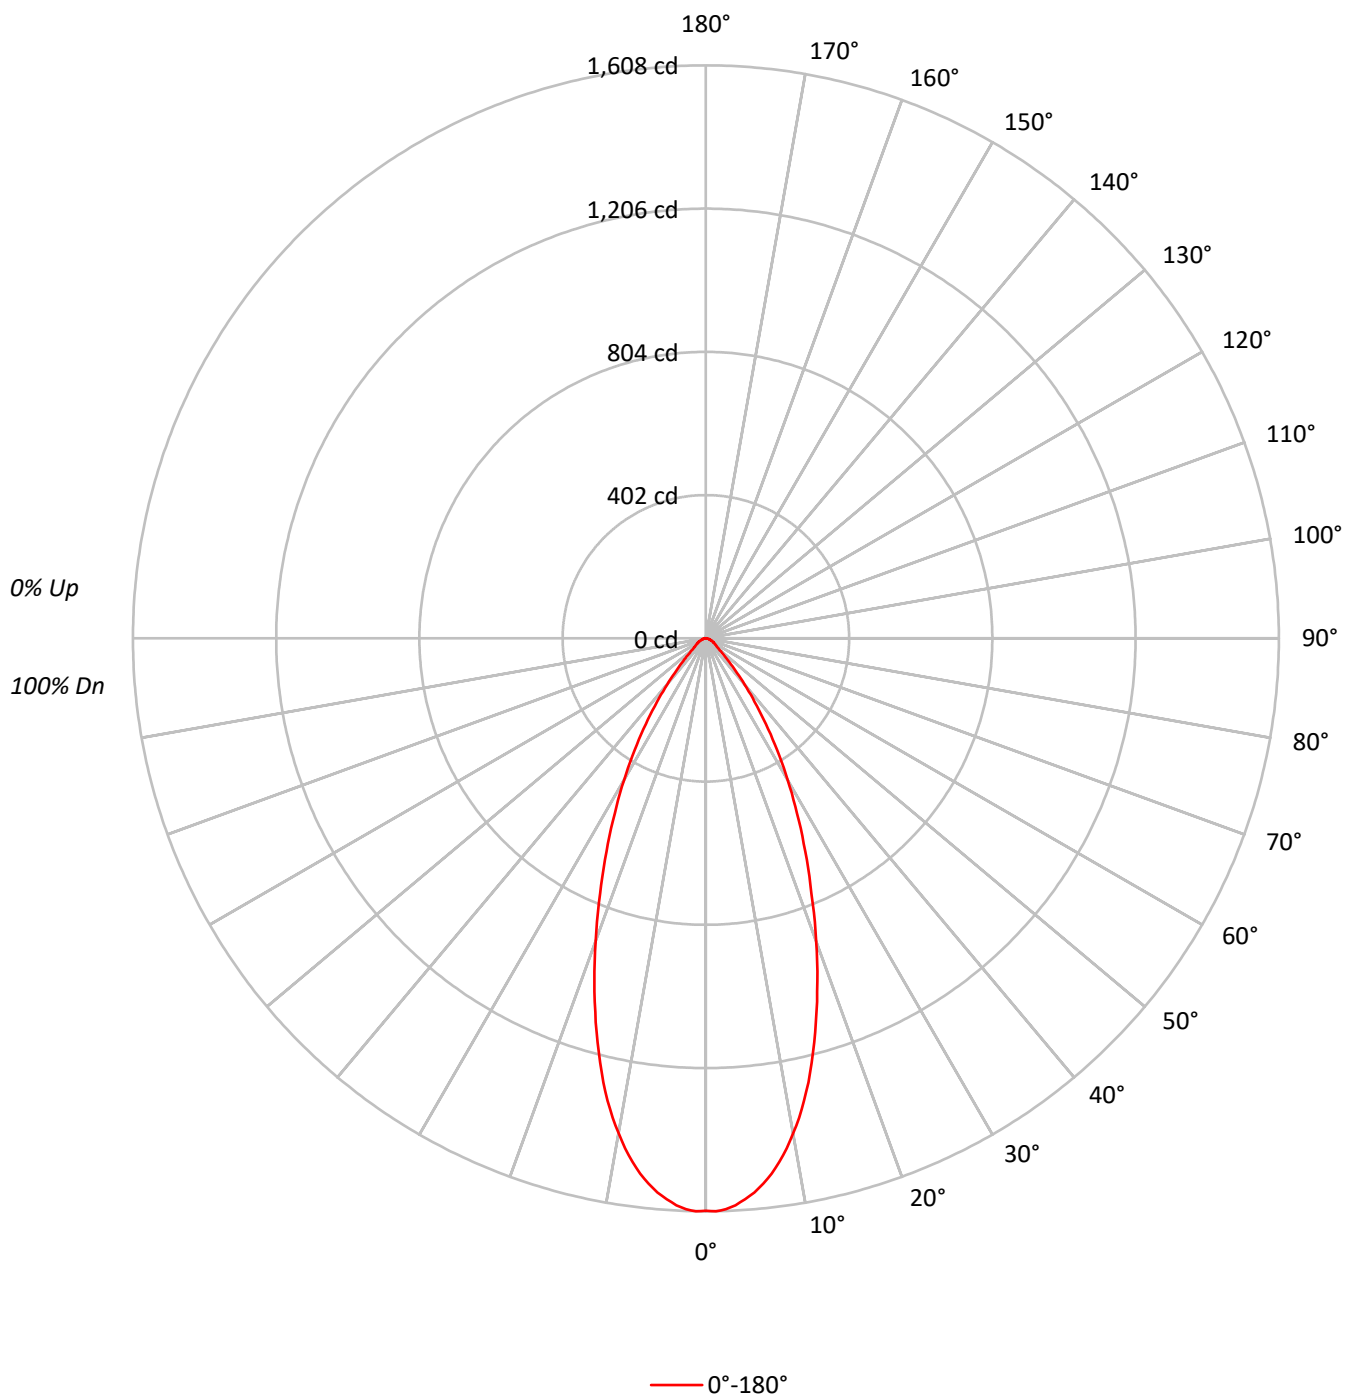

TEST NUMBER: P1252726

CATALOG NUMBER: P3AS20R359030D010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	97	93	97	94	91		94	92	89		91
3	102	95	90	86	100	94	89	85	91	87	84		89	85	82		86
4	97	89	83	79	95	88	82	78	86	81	77		84	80	77		82
5	92	83	77	73	90	82	77	73	81	76	72		79	75	71		77
6	87	78	72	68	86	77	72	68	76	71	67		75	70	67		73
7	83	74	68	63	82	73	67	63	72	67	63		71	66	63		69
8	79	70	64	60	78	69	63	59	68	63	59		67	62	59		66
9	76	66	60	56	75	66	60	56	65	59	56		64	59	56		63
10	72	63	57	53	71	62	57	53	61	56	53		61	56	53		60

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	352274
5°	343605
10°	314134
15°	266630
20°	211068
25°	159638
30°	116220
35°	78594
40°	48319
45°	27724
50°	16682
55°	13534
60°	11841
65°	10533
70°	8655
75°	8557
80°	8587
85°	8554

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 27724 cd/sqm

TEST NUMBER: P1252726

CATALOG NUMBER: P3AS20R359030D010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.3	13.2
10°-20°	323.8	29.5
20°-30°	302.9	27.6
30°-40°	185.4	16.9
40°-50°	73.1	6.7
50°-60°	32.2	2.9
60°-70°	20.0	1.8
70°-80°	10.7	1.0
80°-90°	3.7	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	771.0	70.3
0°-40°	956.3	87.3
0°-60°	1061.6	96.9
0°-90°	1096.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1096.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1606	
5°	1561	144
15°	1174	324
25°	660	303
35°	294	185
45°	89	73
55°	35	32
65°	20	20
75°	10	11
85°	3	4
90°	0	

TEST NUMBER: P1252726

CATALOG NUMBER: P3AS20R359030D010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1606.5
1°	1608.2
2°	1603.2
3°	1593.0
4°	1577.9
5°	1561.0
6°	1539.0
7°	1513.7
8°	1483.4
9°	1449.6
10°	1410.8
11°	1370.3
12°	1326.4
13°	1279.2
14°	1226.8
15°	1174.5
17.5°	1039.5
20°	904.5
22.5°	774.6
25°	659.8
27.5°	553.5
30°	459.0
32.5°	371.3
35°	293.6
37.5°	224.4
40°	168.8
42.5°	121.5
45°	89.4
47.5°	64.1
50°	48.9
52.5°	40.5
55°	35.4
57.5°	30.4
60°	27.0
62.5°	23.6
65°	20.3
67.5°	16.9
70°	13.5
72.5°	11.8
75°	10.1
77.5°	8.4
80°	6.8
82.5°	5.1
85°	3.4
87.5°	1.7



TEST NUMBER: P1252726

CATALOG NUMBER: P3AS20R359030D010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)