

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1252972

Luminaire Tested: P3AS24R209030D010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1252972
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-7)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R209030D010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R20 optic, 3000K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1976.0 lumens
Efficiency: N/A
Efficacy: 68.6 lumens/watt
Spacing Criteria (0/90/45): 0.44 / 0.44 / 0.46
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1252972

CATALOG NUMBER: P3AS24R209030D010 E3DL1WMH

Luminous Intensity Polar Plot

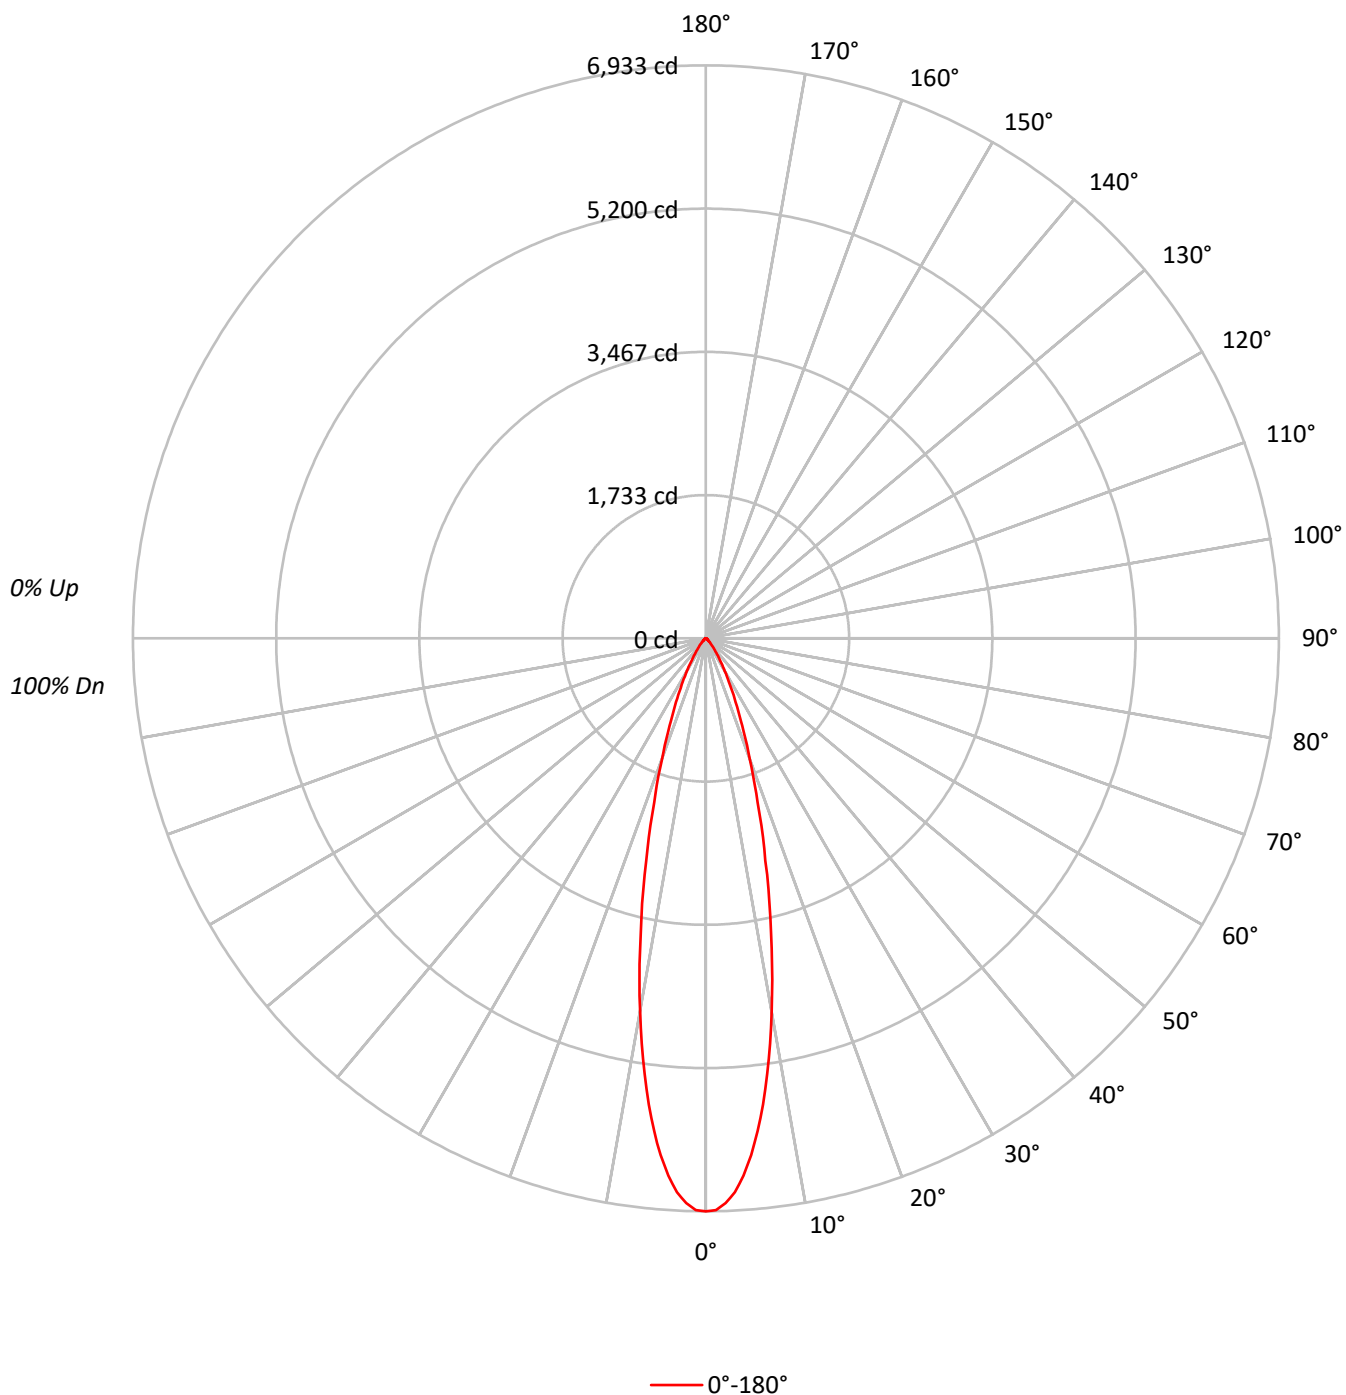

TEST NUMBER: P1252972

CATALOG NUMBER: P3AS24R209030D010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	102	100	108	104	101	98	101	98	96		98	96	94		95
3	106	100	96	93	104	99	95	92	97	93	91		94	92	89		92
4	102	96	91	88	100	95	90	87	92	89	86		91	88	85		89
5	98	91	87	83	97	90	86	83	89	85	82		87	84	81		86
6	95	87	83	79	93	87	82	79	85	81	78		84	81	78		83
7	91	84	79	76	90	83	79	76	82	78	75		81	78	75		80
8	88	81	76	73	87	80	76	73	79	75	72		78	75	72		78
9	85	78	73	70	85	77	73	70	77	73	70		76	72	69		75
10	83	75	71	68	82	75	70	67	74	70	67		73	70	67		73

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1520317
5°	1381991
10°	1021379
15°	631831
20°	360811
25°	205996
30°	115511
35°	62854
40°	34436
45°	18948
50°	11087
55°	8028
60°	7543
65°	6953
70°	6091
75°	6439
80°	4799
85°	4780

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 18948 cd/sqm

TEST NUMBER: P1252972

CATALOG NUMBER: P3AS24R209030D010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	543.7	27.5
10°-20°	776.1	39.3
20°-30°	405.1	20.5
30°-40°	156.6	7.9
40°-50°	50.8	2.6
50°-60°	20.0	1.0
60°-70°	13.2	0.7
70°-80°	7.8	0.4
80°-90°	2.6	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1724.9	87.3
0°-40°	1881.5	95.2
0°-60°	1952.4	98.8
0°-90°	1976.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1976.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6933	
5°	6278	544
15°	2783	776
25°	851	405
35°	235	157
45°	61	51
55°	21	20
65°	13	13
75°	8	8
85°	2	3
90°	0	

TEST NUMBER: P1252972

CATALOG NUMBER: P3AS24R209030D010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	6933.2
1°	6919.8
2°	6837.7
3°	6711.7
4°	6517.0
5°	6278.4
6°	5995.9
7°	5682.8
8°	5320.1
9°	4967.0
10°	4587.1
12.5°	3646.0
15°	2783.2
17.5°	2082.6
20°	1546.2
22.5°	1145.3
25°	851.4
27.5°	628.0
30°	456.2
32.5°	330.2
35°	234.8
37.5°	169.9
40°	120.3
42.5°	85.9
45°	61.1
47.5°	43.9
50°	32.5
52.5°	24.8
55°	21.0
57.5°	19.1
60°	17.2
62.5°	15.3
65°	13.4
67.5°	11.5
70°	9.5
72.5°	9.5
75°	7.6
77.5°	5.7
80°	3.8
82.5°	3.8
85°	1.9
87.5°	1.9
90°	0.0

(END OF REPORT)