

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253106

Luminaire Tested: P3AS24R459030D010 E3CB1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253106
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R459030D010 E3CB1MW
Description: 3in Adjustable LED luminaire with, R45 optic, 3000K CCT AND, 90CRI , E3CB1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2560.9 lumens
Efficiency: N/A
Efficacy: 88.9 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253106

CATALOG NUMBER: P3AS24R459030D010 E3CB1MW

Luminous Intensity Polar Plot

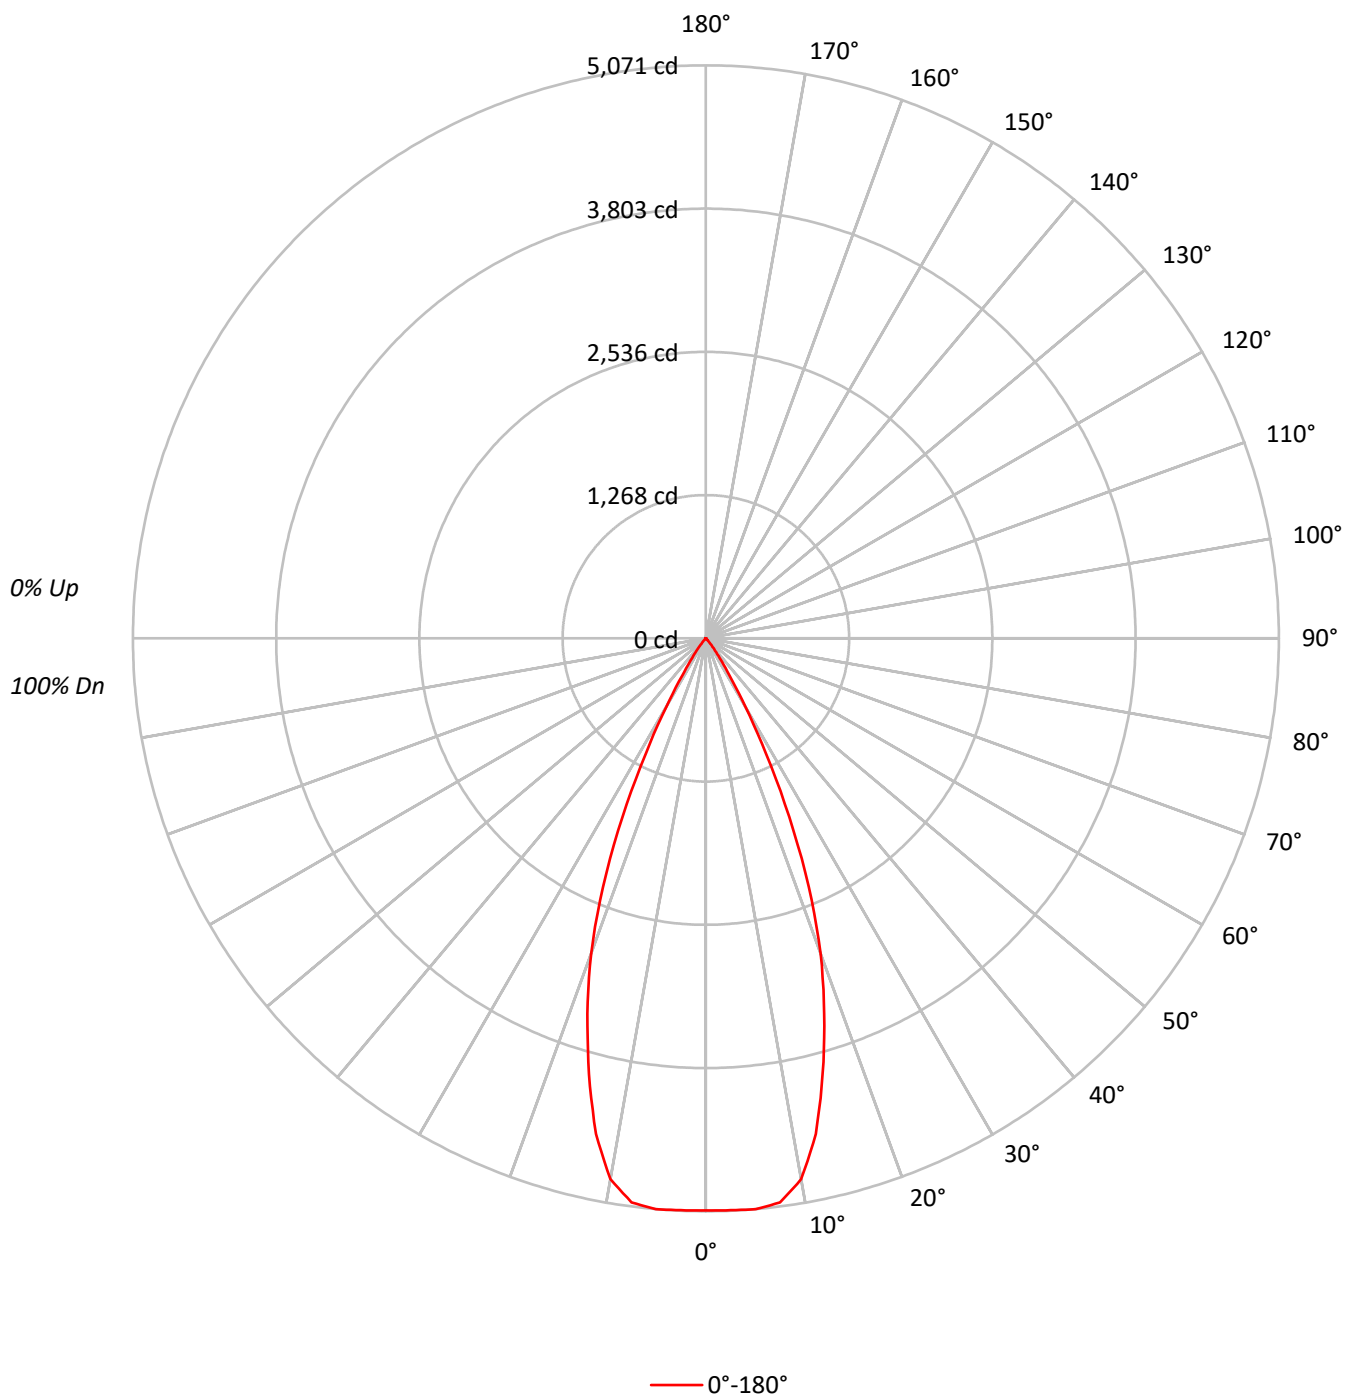

TEST NUMBER: P1253106

CATALOG NUMBER: P3AS24R459030D010 E3CB1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	112	110	108	112	110	108	106	106	104	103		102	101	100		99
2	110	106	102	100	108	104	101	98	101	98	96		98	96	94		95
3	106	100	96	93	104	99	95	92	96	93	91		94	91	89		92
4	102	95	91	87	100	94	90	87	92	89	86		90	87	85		88
5	98	91	86	82	96	90	85	82	88	84	81		87	83	81		85
6	94	87	82	78	93	86	81	78	85	80	77		83	80	77		82
7	90	83	78	74	89	82	78	74	81	77	74		80	76	74		79
8	87	79	74	71	86	79	74	71	78	74	71		77	73	70		76
9	84	76	71	68	83	76	71	68	75	71	68		74	70	67		73
10	81	73	68	65	80	73	68	65	72	68	65		71	67	65		71

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1110328
5°	1116264
10°	1081966
15°	906679
20°	693084
25°	421936
30°	175546
35°	56242
40°	17490
45°	3566
50°	2593
55°	2906
60°	2500
65°	2958
70°	2436
75°	3219
80°	2399
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3566 cd/sqm

TEST NUMBER: P1253106

CATALOG NUMBER: P3AS24R459030D010 E3CB1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	478.3	18.7
10°-20°	1097.7	42.9
20°-30°	790.4	30.9
30°-40°	164.4	6.4
40°-50°	15.0	0.6
50°-60°	6.2	0.2
60°-70°	4.9	0.2
70°-80°	3.3	0.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2366.3	92.4
0°-40°	2530.7	98.8
0°-60°	2551.9	99.6
0°-90°	2560.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2560.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5064	
5°	5071	478
15°	3994	1098
25°	1744	790
35°	210	164
45°	12	15
55°	8	6
65°	6	5
75°	4	3
85°	0	1
90°	0	

TEST NUMBER: P1253106

CATALOG NUMBER: P3AS24R459030D010 E3CB1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5063.5
2.5°	5065.4
5°	5071.2
7.5°	5034.9
10°	4859.2
12.5°	4492.4
15°	3993.9
17.5°	3483.9
20°	2970.1
22.5°	2379.9
25°	1743.9
27.5°	1149.8
30°	693.3
32.5°	387.7
35°	210.1
37.5°	118.4
40°	61.1
42.5°	26.7
45°	11.5
47.5°	7.6
50°	7.6
52.5°	7.6
55°	7.6
57.5°	5.7
60°	5.7
62.5°	5.7
65°	5.7
67.5°	3.8
70°	3.8
72.5°	3.8
75°	3.8
77.5°	1.9
80°	1.9
82.5°	1.9
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)