

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253110

Luminaire Tested: P3AS24R459030D010 E3D1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253110
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-28)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R459030D010 E3D1MW
Description: 3in Adjustable LED luminaire with, R45 optic, 3000K CCT AND, 90CRI , E3D1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2560.9 lumens
Efficiency: N/A
Efficacy: 88.9 lumens/watt
Spacing Criteria (0/90/45): 0.72 / 0.72 / 0.66
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253110

CATALOG NUMBER: P3AS24R459030D010 E3D1MW

Luminous Intensity Polar Plot

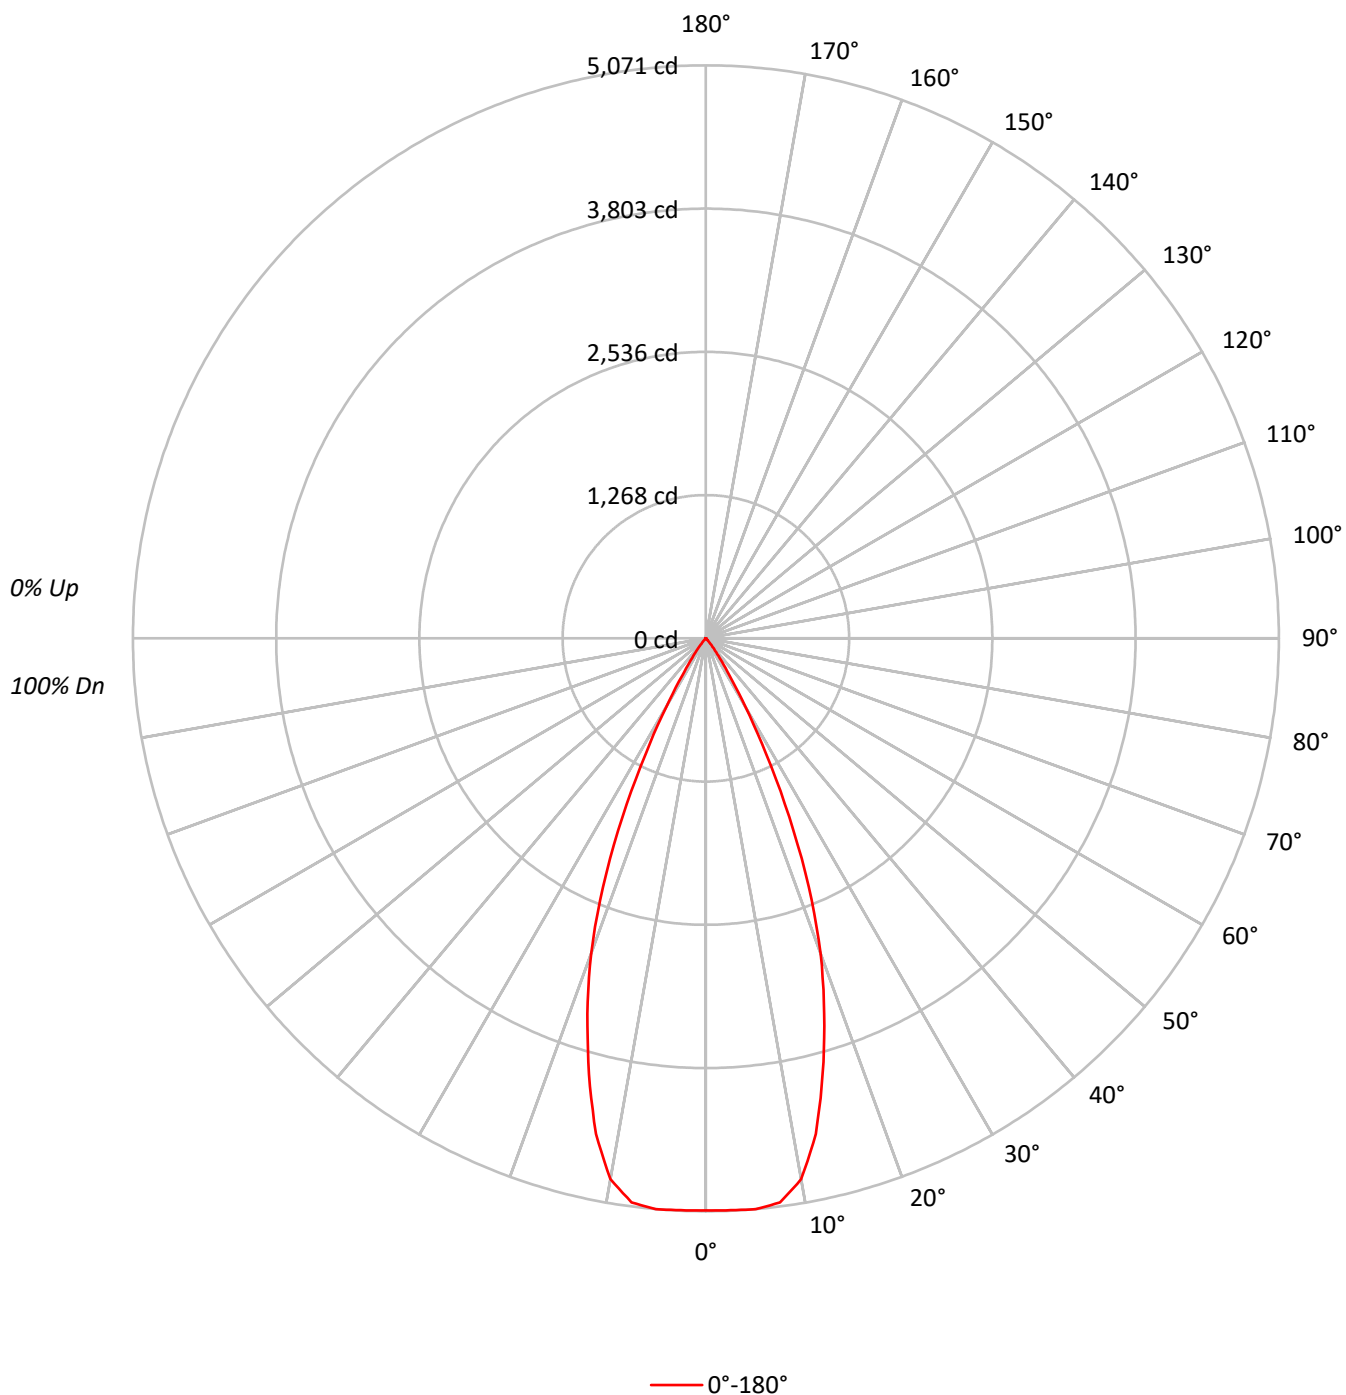

TEST NUMBER: P1253110

CATALOG NUMBER: P3AS24R459030D010 E3D1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					30					10					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	110	108		112	110	108	106		106	104	103		102	101	100		99	98	97
2	110	106	102	100		108	104	101	98		101	98	96		98	96	94		95	94	92
3	106	100	96	93		104	99	95	92		96	93	91		94	91	89		92	90	88
4	102	95	91	87		100	94	90	87		92	89	86		90	87	85		88	86	84
5	98	91	86	82		96	90	85	82		88	84	81		87	83	81		85	82	80
6	94	87	82	78		93	86	81	78		85	80	77		83	80	77		82	79	76
7	90	83	78	74		89	82	78	74		81	77	74		80	76	74		79	76	73
8	87	79	74	71		86	79	74	71		78	74	71		77	73	70		76	73	70
9	84	76	71	68		83	76	71	68		75	71	68		74	70	67		73	70	67
10	81	73	68	65		80	73	68	65		72	68	65		71	67	65		71	67	65

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1110328
5°	1116264
10°	1081966
15°	906679
20°	693084
25°	421936
30°	175546
35°	56242
40°	17490
45°	3566
50°	2593
55°	2906
60°	2500
65°	2958
70°	2436
75°	3219
80°	2399
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3566 cd/sqm

TEST NUMBER: P1253110

CATALOG NUMBER: P3AS24R459030D010 E3D1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	478.3	18.7
10°-20°	1097.7	42.9
20°-30°	790.4	30.9
30°-40°	164.4	6.4
40°-50°	15.0	0.6
50°-60°	6.2	0.2
60°-70°	4.9	0.2
70°-80°	3.3	0.1
80°-90°	0.8	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2366.3	92.4
0°-40°	2530.7	98.8
0°-60°	2551.9	99.6
0°-90°	2560.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2560.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5064	
5°	5071	478
15°	3994	1098
25°	1744	790
35°	210	164
45°	12	15
55°	8	6
65°	6	5
75°	4	3
85°	0	1
90°	0	

TEST NUMBER: P1253110

CATALOG NUMBER: P3AS24R459030D010 E3D1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	5063.5
2.5°	5065.4
5°	5071.2
7.5°	5034.9
10°	4859.2
12.5°	4492.4
15°	3993.9
17.5°	3483.9
20°	2970.1
22.5°	2379.9
25°	1743.9
27.5°	1149.8
30°	693.3
32.5°	387.7
35°	210.1
37.5°	118.4
40°	61.1
42.5°	26.7
45°	11.5
47.5°	7.6
50°	7.6
52.5°	7.6
55°	7.6
57.5°	5.7
60°	5.7
62.5°	5.7
65°	5.7
67.5°	3.8
70°	3.8
72.5°	3.8
75°	3.8
77.5°	1.9
80°	1.9
82.5°	1.9
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)