

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253180

Luminaire Tested: P3AS24R559030D010 E3DLD1WMH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1253180  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS24R559030D010 E3DLD1WMH  
Description: 3in Adjustable LED luminaire with, R55 optic, 3000K CCT AND, 90CRI , E3DLD1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1616.0 lumens  
Efficiency: N/A  
Efficacy: 56.1 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1253180  
CATALOG NUMBER: P3AS24R559030D010 E3DLD1WMH

### Luminous Intensity Polar Plot

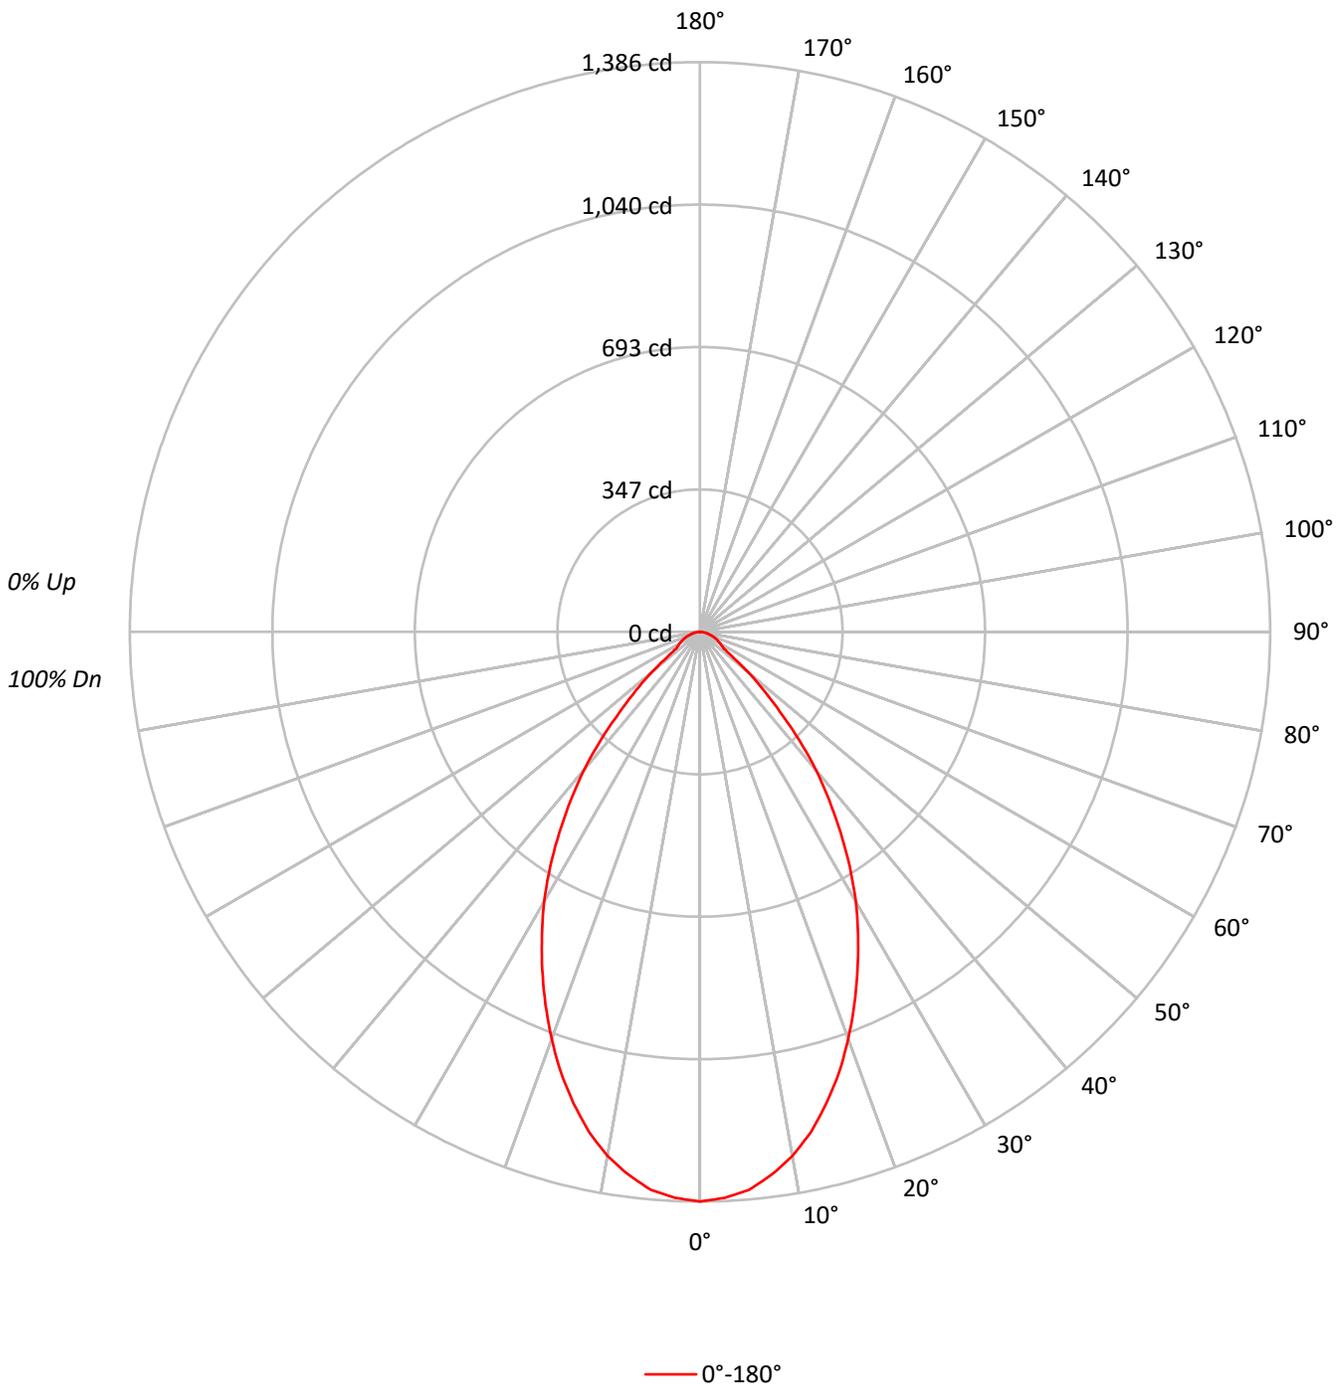



TEST NUMBER: P1253180  
 CATALOG NUMBER: P3AS24R559030D010 E3DLD1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |   |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |   |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |
| 1   | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 100 | 98  | 99  | 97  | 95  | 95  | 94  | 93  | 91  |    |    |   |
| 2   | 105 | 100 | 95  | 91  | 103 | 98  | 93  | 90  | 94  | 91  | 88  | 91  | 88  | 86  | 89  | 86  | 84  | 82  |    |    |   |
| 3   | 99  | 91  | 85  | 81  | 97  | 90  | 84  | 80  | 87  | 82  | 79  | 85  | 81  | 77  | 82  | 79  | 76  | 74  |    |    |   |
| 4   | 93  | 84  | 77  | 72  | 91  | 83  | 77  | 72  | 80  | 75  | 71  | 78  | 74  | 70  | 76  | 73  | 69  | 68  |    |    |   |
| 5   | 87  | 77  | 71  | 66  | 85  | 76  | 70  | 65  | 75  | 69  | 65  | 73  | 68  | 64  | 71  | 67  | 64  | 62  |    |    |   |
| 6   | 82  | 72  | 65  | 60  | 80  | 71  | 64  | 60  | 69  | 64  | 59  | 68  | 63  | 59  | 66  | 62  | 58  | 57  |    |    |   |
| 7   | 77  | 67  | 60  | 55  | 76  | 66  | 59  | 55  | 65  | 59  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 52  |    |    |   |
| 8   | 73  | 62  | 55  | 51  | 72  | 62  | 55  | 51  | 60  | 55  | 50  | 59  | 54  | 50  | 58  | 53  | 50  | 48  |    |    |   |
| 9   | 69  | 58  | 51  | 47  | 68  | 58  | 51  | 47  | 57  | 51  | 47  | 56  | 50  | 46  | 55  | 50  | 46  | 45  |    |    |   |
| 10  | 65  | 55  | 48  | 44  | 64  | 54  | 48  | 44  | 53  | 47  | 43  | 52  | 47  | 43  | 52  | 47  | 43  | 42  |    |    |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 303857 |
| 5°  | 299977 |
| 10° | 288149 |
| 15° | 269513 |
| 20° | 245861 |
| 25° | 219351 |
| 30° | 191852 |
| 35° | 159411 |
| 40° | 125664 |
| 45° | 85218  |
| 50° | 52092  |
| 55° | 26991  |
| 60° | 25130  |
| 65° | 23764  |
| 70° | 22055  |
| 75° | 19402  |
| 80° | 19321  |
| 85° | 14341  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 85218 cd/sqm



TEST NUMBER: P1253180  
 CATALOG NUMBER: P3AS24R559030D010 E3DLD1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 127.8  | 7.9       |
| 10°-20°   | 331.8  | 20.5      |
| 20°-30°   | 415.5  | 25.7      |
| 30°-40°   | 370.9  | 23.0      |
| 40°-50°   | 217.2  | 13.4      |
| 50°-60°   | 75.0   | 4.6       |
| 60°-70°   | 45.3   | 2.8       |
| 70°-80°   | 25.2   | 1.6       |
| 80°-90°   | 7.3    | 0.4       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 875.1  | 54.2      |
| 0°-40°    | 1246.0 | 77.1      |
| 0°-60°    | 1538.2 | 95.2      |
| 0°-90°    | 1616.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 1616.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1386 |      |
| 5°  | 1363 | 128  |
| 15° | 1187 | 332  |
| 25° | 907  | 416  |
| 35° | 596  | 371  |
| 45° | 275  | 217  |
| 55° | 71   | 75   |
| 65° | 46   | 45   |
| 75° | 23   | 25   |
| 85° | 6    | 7    |
| 90° | 0    |      |



TEST NUMBER: P1253180  
CATALOG NUMBER: P3AS24R559030D010 E3DLD1WMH

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1385.7 |
| 2.5°  | 1378.0 |
| 5°    | 1362.8 |
| 7.5°  | 1332.2 |
| 10°   | 1294.1 |
| 12.5° | 1246.3 |
| 15°   | 1187.2 |
| 17.5° | 1124.2 |
| 20°   | 1053.6 |
| 22.5° | 981.0  |
| 25°   | 906.6  |
| 27.5° | 832.2  |
| 30°   | 757.7  |
| 32.5° | 677.6  |
| 35°   | 595.5  |
| 37.5° | 515.3  |
| 40°   | 439.0  |
| 42.5° | 356.9  |
| 45°   | 274.8  |
| 47.5° | 209.9  |
| 50°   | 152.7  |
| 52.5° | 99.2   |
| 55°   | 70.6   |
| 57.5° | 63.0   |
| 60°   | 57.3   |
| 62.5° | 51.5   |
| 65°   | 45.8   |
| 67.5° | 40.1   |
| 70°   | 34.4   |
| 72.5° | 28.6   |
| 75°   | 22.9   |
| 77.5° | 19.1   |
| 80°   | 15.3   |
| 82.5° | 9.5    |
| 85°   | 5.7    |
| 87.5° | 3.8    |
| 90°   | 0.0    |

(END OF REPORT)