

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253261

Luminaire Tested: P3AS24R709030D010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253261
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R709030D010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R70 optic, 3000K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1923.0 lumens
Efficiency: N/A
Efficacy: 66.8 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253261

CATALOG NUMBER: P3AS24R709030D010 E3DL1WMH

Luminous Intensity Polar Plot

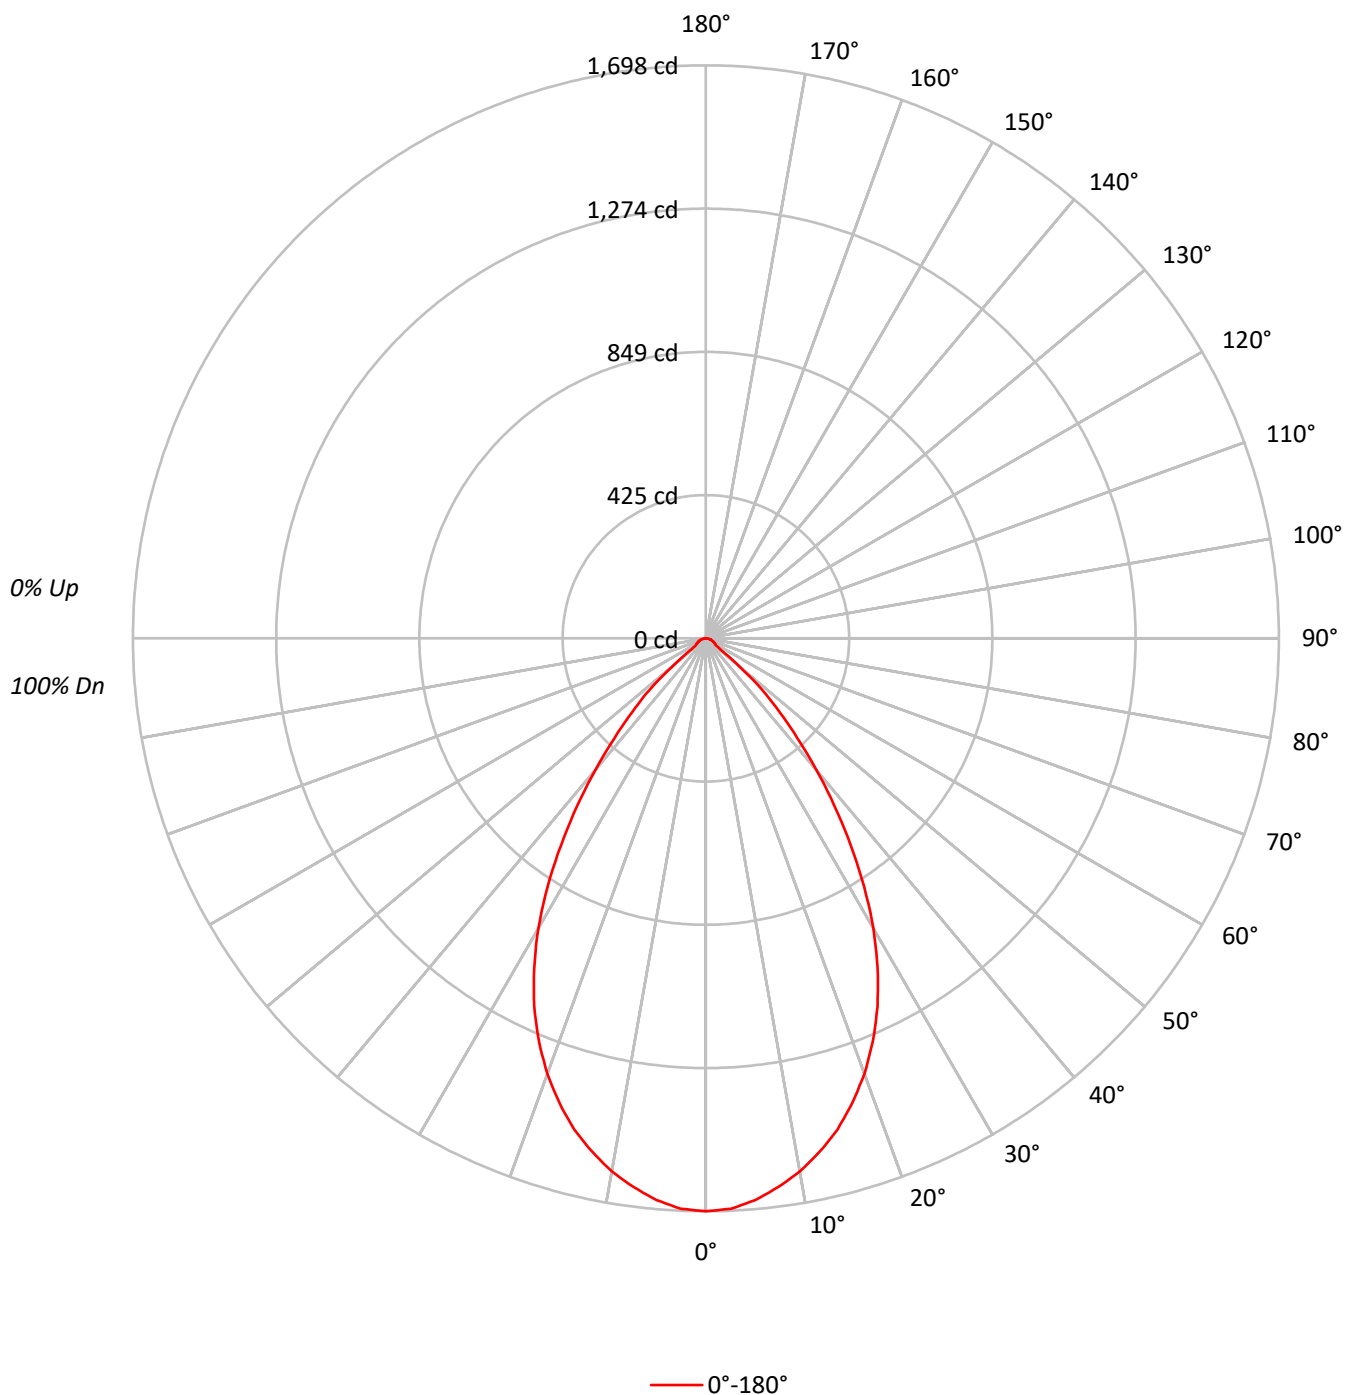

TEST NUMBER: P1253261

CATALOG NUMBER: P3AS24R709030D010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	100		100	98	97		96
2	106	101	96	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	88	83	98	92	87	82	89	85	81		86	83	80		84
4	94	86	80	75	93	85	79	75	83	78	74		81	76	73		79
5	89	80	73	69	87	79	73	68	77	72	68		75	71	67		74
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	53	74	64	58	53	63	57	53		62	57	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	49	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	372273
5°	367818
10°	357174
15°	342045
20°	320418
25°	291089
30°	251431
35°	200394
40°	145959
45°	95948
50°	44962
55°	13878
60°	13420
65°	12868
70°	12246
75°	12963
80°	11996
85°	9561

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 95948 cd/sqm

TEST NUMBER: P1253261

CATALOG NUMBER: P3AS24R709030D010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.3	8.2
10°-20°	421.7	21.9
20°-30°	548.1	28.5
30°-40°	465.1	24.2
40°-50°	239.8	12.5
50°-60°	46.2	2.4
60°-70°	25.0	1.3
70°-80°	15.4	0.8
80°-90°	4.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1127.1	58.6
0°-40°	1592.2	82.8
0°-60°	1878.2	97.7
0°-90°	1923.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1923.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1698	
5°	1671	157
15°	1507	422
25°	1203	548
35°	749	465
45°	309	240
55°	36	46
65°	25	25
75°	15	15
85°	4	4
90°	0	

TEST NUMBER: P1253261

CATALOG NUMBER: P3AS24R709030D010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1697.7
2.5°	1692.0
5°	1671.0
7.5°	1640.4
10°	1604.1
12.5°	1558.3
15°	1506.7
17.5°	1443.7
20°	1373.1
22.5°	1292.9
25°	1203.1
27.5°	1101.9
30°	993.0
32.5°	872.7
35°	748.6
37.5°	626.4
40°	509.9
42.5°	401.0
45°	309.4
47.5°	227.3
50°	131.8
52.5°	57.3
55°	36.3
57.5°	34.4
60°	30.6
62.5°	28.6
65°	24.8
67.5°	22.9
70°	19.1
72.5°	17.2
75°	15.3
77.5°	11.5
80°	9.5
82.5°	5.7
85°	3.8
87.5°	1.9
90°	0.0

(END OF REPORT)