

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253487

Luminaire Tested: P3AS02R309035DE010 E3DLD1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253487
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-14)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R309035DE010 E3DLD1WH
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 90CRI , E3DLD1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 204.1 lumens
Efficiency: N/A
Efficacy: 56.7 lumens/watt
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253487

CATALOG NUMBER: P3AS02R309035DE010 E3DLD1WH

Luminous Intensity Polar Plot

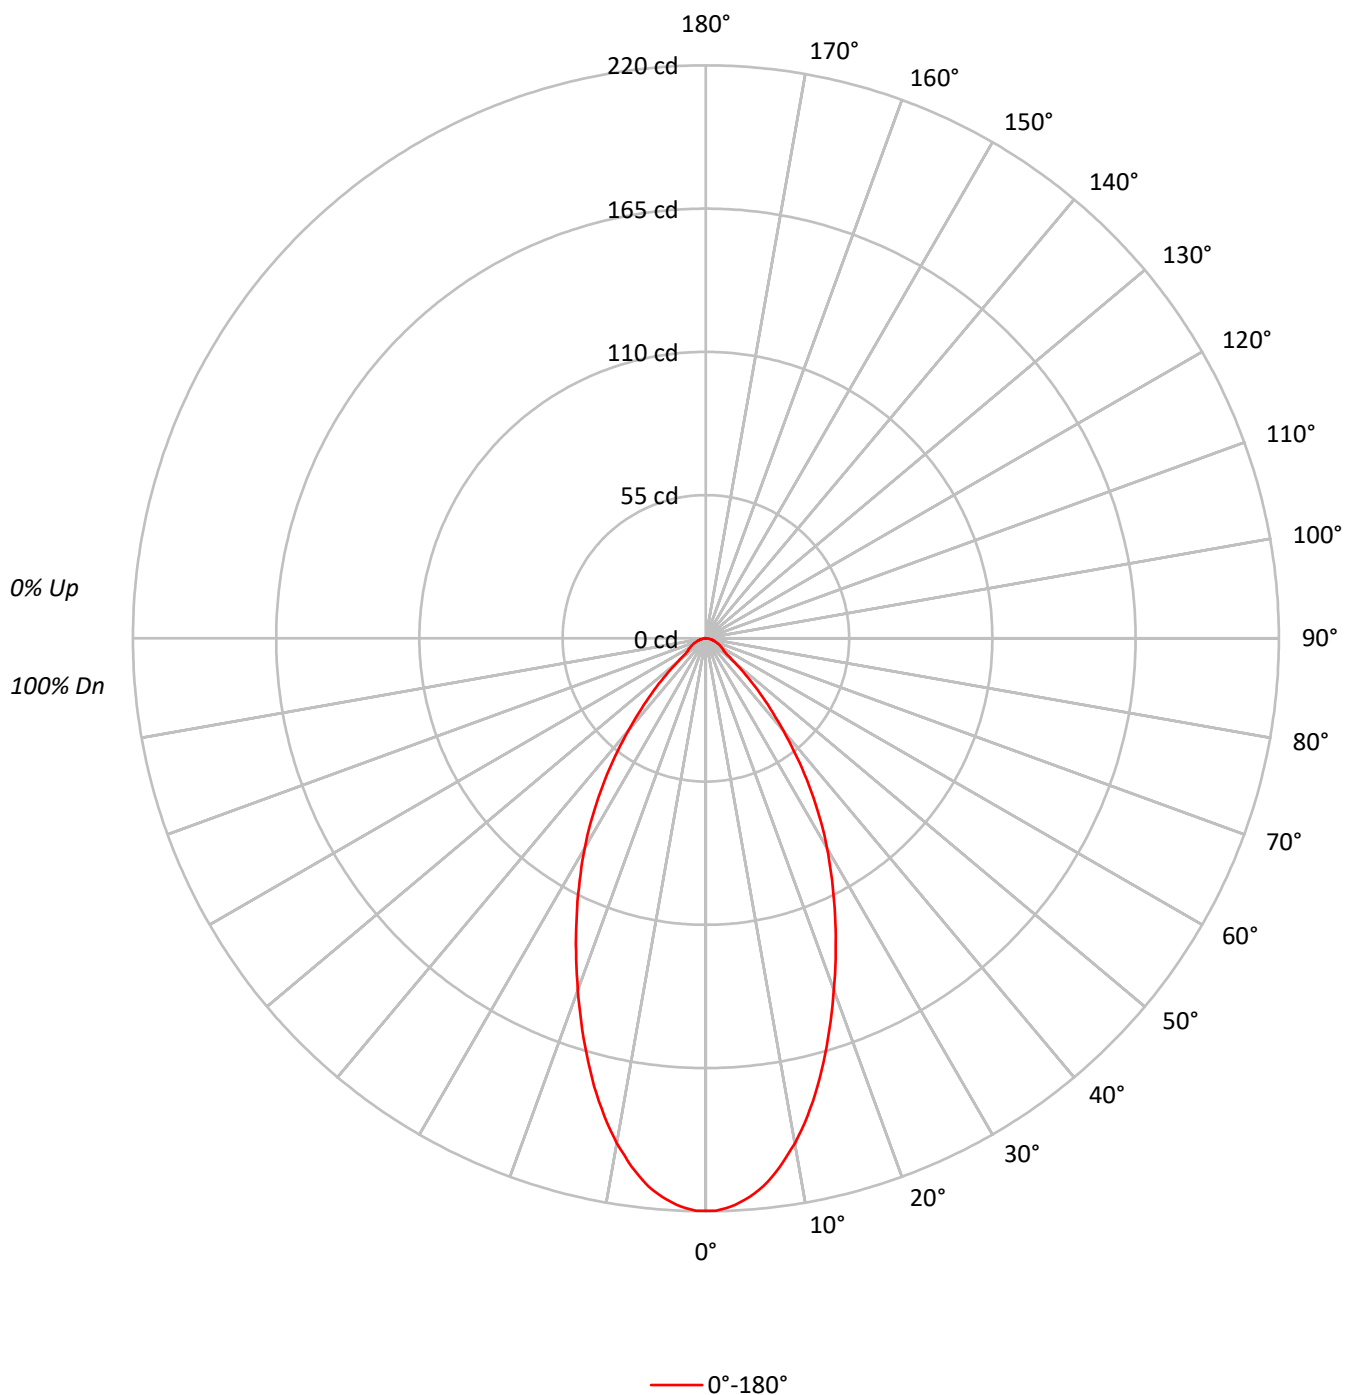



TEST NUMBER: P1253487

CATALOG NUMBER: P3AS02R309035DE010 E3DLD1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		89
3	100	92	87	82	98	91	86	82	88	84	80		86	82	79		83
4	94	85	79	74	92	84	78	74	82	77	73		80	76	72		78
5	89	79	73	68	87	78	72	68	76	71	67		75	70	66		73
6	84	74	67	62	82	73	67	62	71	66	62		70	65	61		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	54	74	64	58	53	63	57	53		62	57	53		61
9	71	61	54	50	70	60	54	50	59	54	50		58	53	49		57
10	68	57	51	47	67	57	51	47	56	50	47		55	50	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	48198
5°	47105
10°	43820
15°	38979
20°	33533
25°	28405
30°	23573
35°	18498
40°	13253
45°	8683
50°	4947
55°	3250
60°	3070
65°	2854
70°	2565
75°	2372
80°	2273
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8683 cd/sqm

TEST NUMBER: P1253487

CATALOG NUMBER: P3AS02R309035DE010 E3DLD1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	19.9	9.7
10°-20°	47.7	23.4
20°-30°	53.8	26.4
30°-40°	43.0	21.0
40°-50°	22.1	10.8
50°-60°	8.3	4.1
60°-70°	5.5	2.7
70°-80°	3.0	1.5
80°-90°	0.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	121.4	59.5
0°-40°	164.4	80.5
0°-60°	194.8	95.4
0°-90°	204.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	204.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	220	
5°	214	20
15°	172	48
25°	117	54
35°	69	43
45°	28	22
55°	8	8
65°	6	5
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1253487

CATALOG NUMBER: P3AS02R309035DE010 E3DLD1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	219.8
1°	219.8
2°	219.0
3°	217.8
4°	216.0
5°	214.0
6°	211.5
7°	208.3
8°	204.8
9°	200.8
10°	196.8
11°	192.3
12°	187.5
13°	182.5
14°	177.2
15°	171.7
17.5°	157.7
20°	143.7
22.5°	130.2
25°	117.4
27.5°	104.9
30°	93.1
32.5°	81.1
35°	69.1
37.5°	57.3
40°	46.3
42.5°	36.5
45°	28.0
47.5°	20.8
50°	14.5
52.5°	10.3
55°	8.5
57.5°	7.8
60°	7.0
62.5°	6.3
65°	5.5
67.5°	4.8
70°	4.0
72.5°	3.3
75°	2.8
77.5°	2.3
80°	1.8
82.5°	1.3
85°	0.8
87.5°	0.3



TEST NUMBER: P1253487

CATALOG NUMBER: P3AS02R309035DE010 E3DLD1WH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)