

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253510

Luminaire Tested: P3AS02R359035DE010 E3DL1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253510
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R359035DE010 E3DL1WMH
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 90CRI , E3DL1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 263.1 lumens
Efficiency: N/A
Efficacy: 73.1 lumens/watt
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253510

CATALOG NUMBER: P3AS02R359035DE010 E3DL1WMH

Luminous Intensity Polar Plot

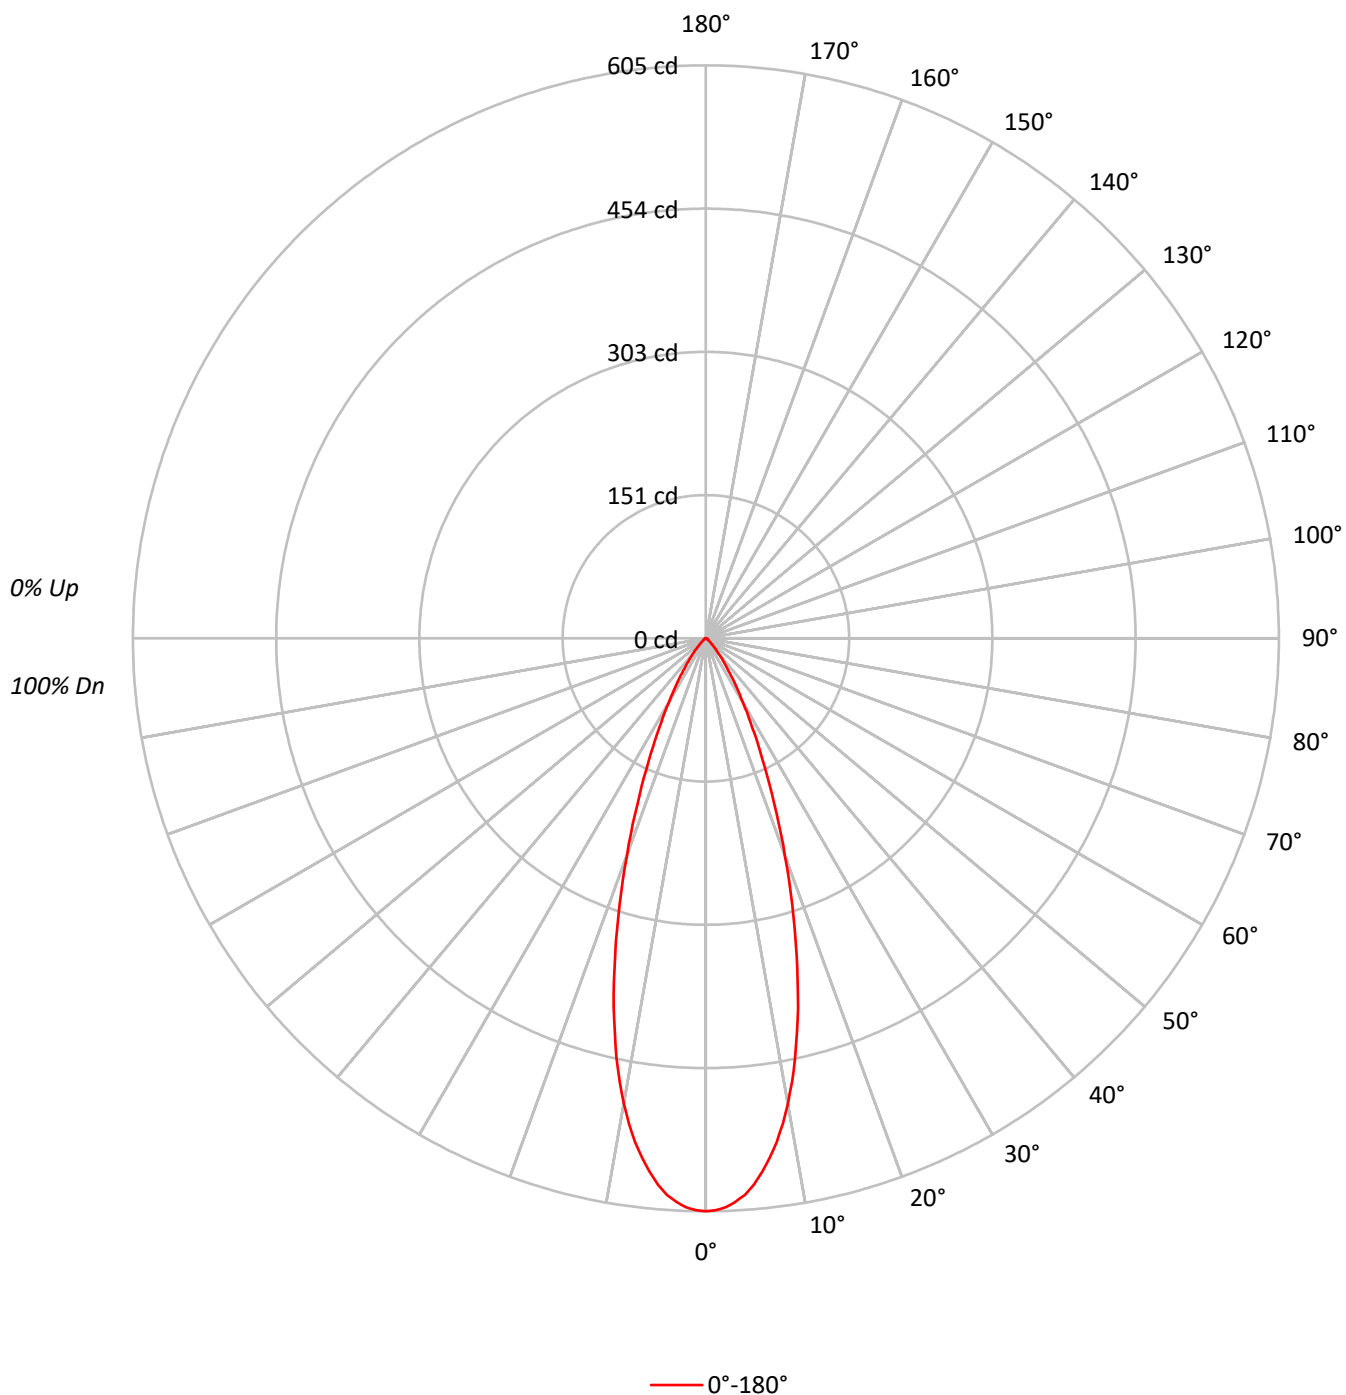

TEST NUMBER: P1253510

CATALOG NUMBER: P3AS02R359035DE010 E3DL1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	114	112	109	107		112	109	107	106		105	104	102		102	100	99		98	97	96
2	109	105	101	98		107	103	100	97		100	97	95		97	95	93		94	93	91
3	105	99	95	91		103	98	94	90		95	92	89		93	90	88		90	88	86
4	100	94	89	85		99	93	88	85		91	87	84		89	85	83		87	84	82
5	96	89	84	80		95	88	83	80		86	82	79		85	81	78		83	80	78
6	92	85	80	76		91	84	79	76		83	78	75		81	77	75		80	77	74
7	89	81	76	72		88	80	75	72		79	75	71		78	74	71		77	73	71
8	85	77	72	69		84	77	72	68		76	71	68		75	71	68		74	70	68
9	82	74	69	66		81	74	69	65		73	68	65		72	68	65		71	67	65
10	79	71	66	63		78	71	66	63		70	66	63		69	65	62		68	65	62

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	132643
5°	127471
10°	111065
15°	85086
20°	56915
25°	34429
30°	19775
35°	11056
40°	5868
45°	3039
50°	1467
55°	1147
60°	1096
65°	934
70°	962
75°	847
80°	1010
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 3039 cd/sqm

TEST NUMBER: P1253510

CATALOG NUMBER: P3AS02R359035DE010 E3DL1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.7	20.0
10°-20°	102.1	38.8
20°-30°	66.9	25.4
30°-40°	27.1	10.3
40°-50°	8.2	3.1
50°-60°	2.8	1.1
60°-70°	1.9	0.7
70°-80°	1.1	0.4
80°-90°	0.4	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	221.7	84.2
0°-40°	248.8	94.5
0°-60°	259.7	98.7
0°-90°	263.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	263.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	605	
5°	579	53
15°	375	102
25°	142	67
35°	41	27
45°	10	8
55°	3	3
65°	2	2
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1253510

CATALOG NUMBER: P3AS02R359035DE010 E3DL1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	604.9
1°	603.9
2°	601.2
3°	595.7
4°	589.2
5°	579.1
6°	566.6
7°	552.6
8°	536.9
9°	518.9
10°	498.8
11°	476.6
12°	453.3
13°	427.3
14°	402.5
15°	374.8
17.5°	307.5
20°	243.9
22.5°	187.6
25°	142.3
27.5°	106.1
30°	78.1
32.5°	57.3
35°	41.3
37.5°	29.3
40°	20.5
42.5°	14.3
45°	9.8
47.5°	6.5
50°	4.3
52.5°	3.3
55°	3.0
57.5°	2.8
60°	2.5
62.5°	2.3
65°	1.8
67.5°	1.5
70°	1.5
72.5°	1.3
75°	1.0
77.5°	0.8
80°	0.8
82.5°	0.5
85°	0.3
87.5°	0.3



TEST NUMBER: P1253510
CATALOG NUMBER: P3AS02R359035DE010 E3DL1WMH

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)