

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253675

Luminaire Tested: P3AS02R659035DE010 E3D1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253675
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-44)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R659035DE010 E3D1MW
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 90CRI , E3D1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 310.1 lumens
Efficiency: N/A
Efficacy: 86.1 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.9
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253675
CATALOG NUMBER: P3AS02R659035DE010 E3D1MW

Luminous Intensity Polar Plot

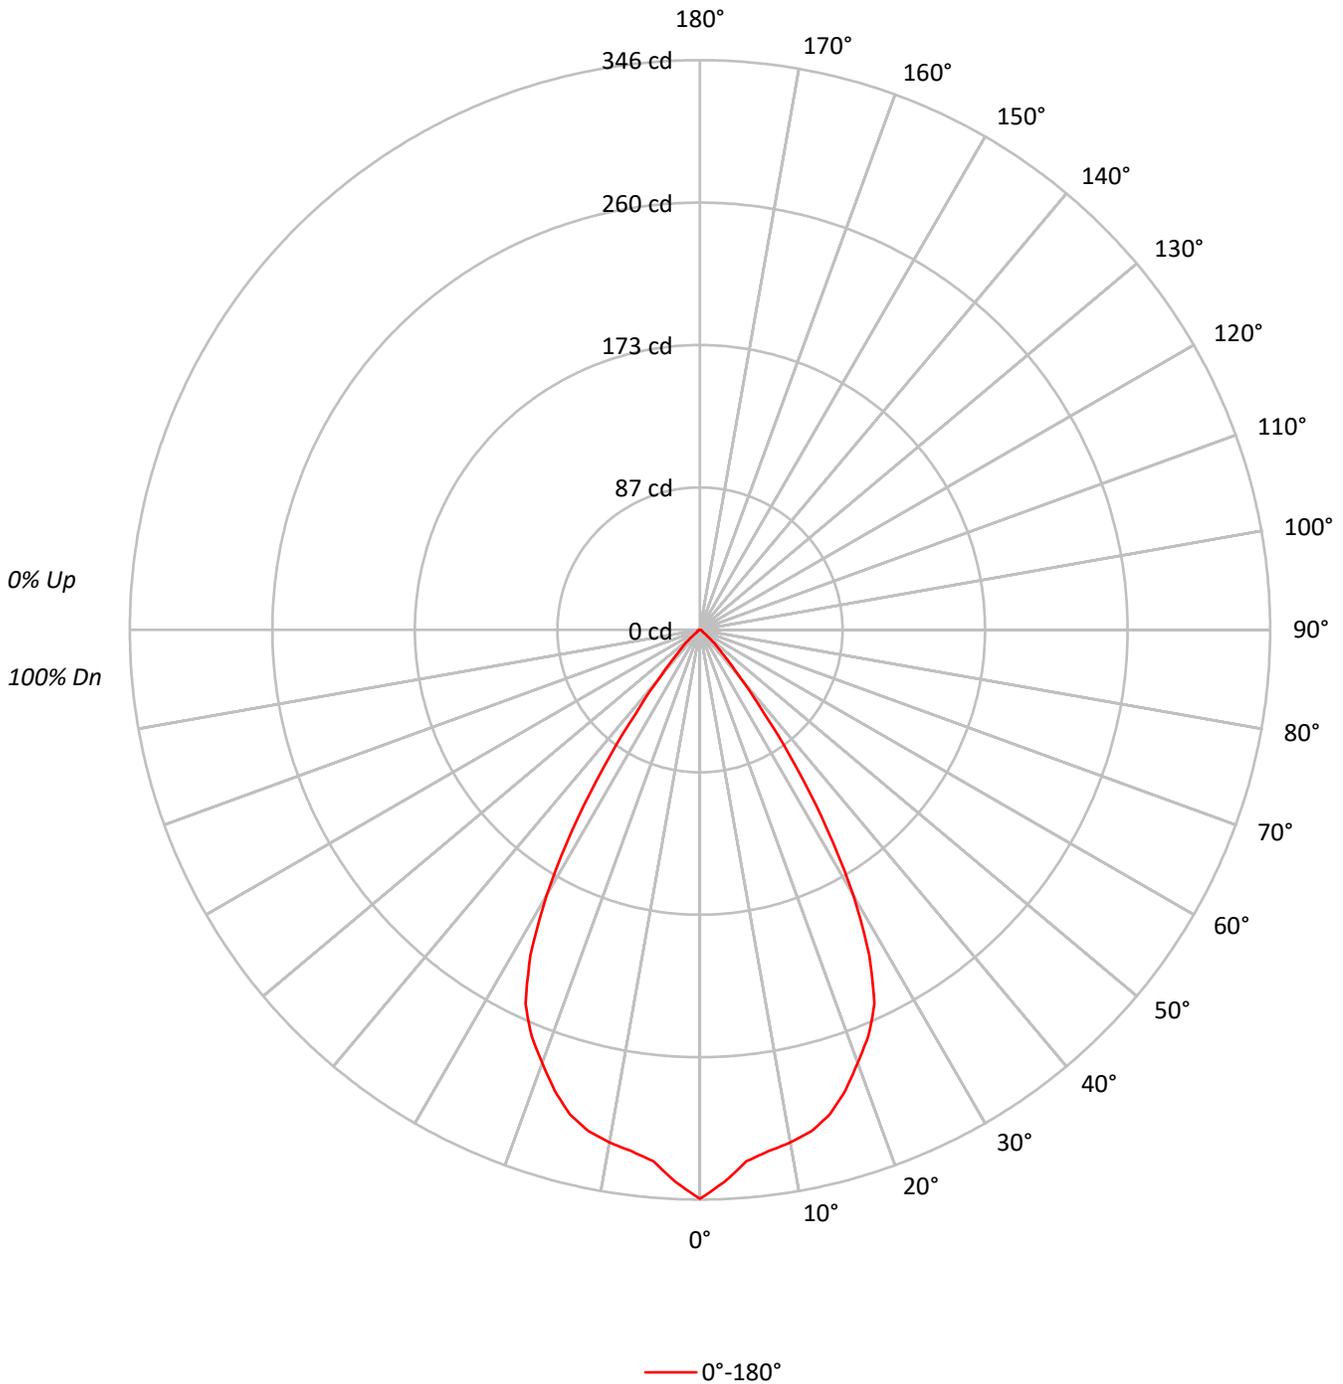



TEST NUMBER: P1253675
 CATALOG NUMBER: P3AS02R659035DE010 E3D1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93	93	93	93
2	108	103	99	96	106	101	98	95	98	95	93	95	93	91	92	90	89	87	87	87	87
3	103	96	91	87	101	95	90	87	92	88	85	90	87	84	87	85	83	81	81	81	81
4	97	90	84	80	96	89	84	80	87	82	79	85	81	78	83	80	77	75	75	75	75
5	93	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	86	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	74	68	64	82	74	68	64	72	67	64	71	67	63	70	66	63	62	62	62	62
8	79	70	64	60	78	69	64	60	68	63	60	67	63	59	66	62	59	58	58	58	58
9	76	66	60	56	75	66	60	56	65	60	56	64	59	56	63	59	56	54	54	54	54
10	72	62	57	53	71	62	57	53	61	56	53	60	56	52	60	55	52	51	51	51	51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	75761
5°	71296
10°	70384
15°	69149
20°	65292
25°	60608
30°	47096
35°	27251
40°	10992
45°	5055
50°	1979
55°	765
60°	658
65°	675
70°	641
75°	678
80°	631
85°	755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 5055 cd/sqm



TEST NUMBER: P1253675
 CATALOG NUMBER: P3AS02R659035DE010 E3D1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.8	9.9
10°-20°	85.1	27.4
20°-30°	111.4	35.9
30°-40°	64.5	20.8
40°-50°	13.8	4.5
50°-60°	2.3	0.7
60°-70°	1.2	0.4
70°-80°	0.8	0.2
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	227.2	73.3
0°-40°	291.7	94.1
0°-60°	307.8	99.3
0°-90°	310.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	310.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	346	
5°	324	31
15°	305	85
25°	250	111
35°	102	65
45°	16	14
55°	2	2
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1253675
CATALOG NUMBER: P3AS02R659035DE010 E3D1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	345.5
2.5°	335.7
5°	323.9
7.5°	319.2
10°	316.1
12.5°	311.9
15°	304.6
17.5°	293.3
20°	279.8
22.5°	267.0
25°	250.5
27.5°	222.6
30°	186.0
32.5°	144.2
35°	101.8
37.5°	64.4
40°	38.4
42.5°	24.1
45°	16.3
47.5°	10.5
50°	5.8
52.5°	2.8
55°	2.0
57.5°	1.8
60°	1.5
62.5°	1.5
65°	1.3
67.5°	1.0
70°	1.0
72.5°	0.8
75°	0.8
77.5°	0.5
80°	0.5
82.5°	0.3
85°	0.3
87.5°	0.3
90°	0.0

(END OF REPORT)