

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253677

Luminaire Tested: P3AS02R659035DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253677
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-16)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R659035DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 90CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 299.0 lumens
Efficiency: N/A
Efficacy: 83.1 lumens/watt
Spacing Criteria (0/90/45): 0.92 / 0.92 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253677

CATALOG NUMBER: P3AS02R659035DE010 E3D1WMH

Luminous Intensity Polar Plot

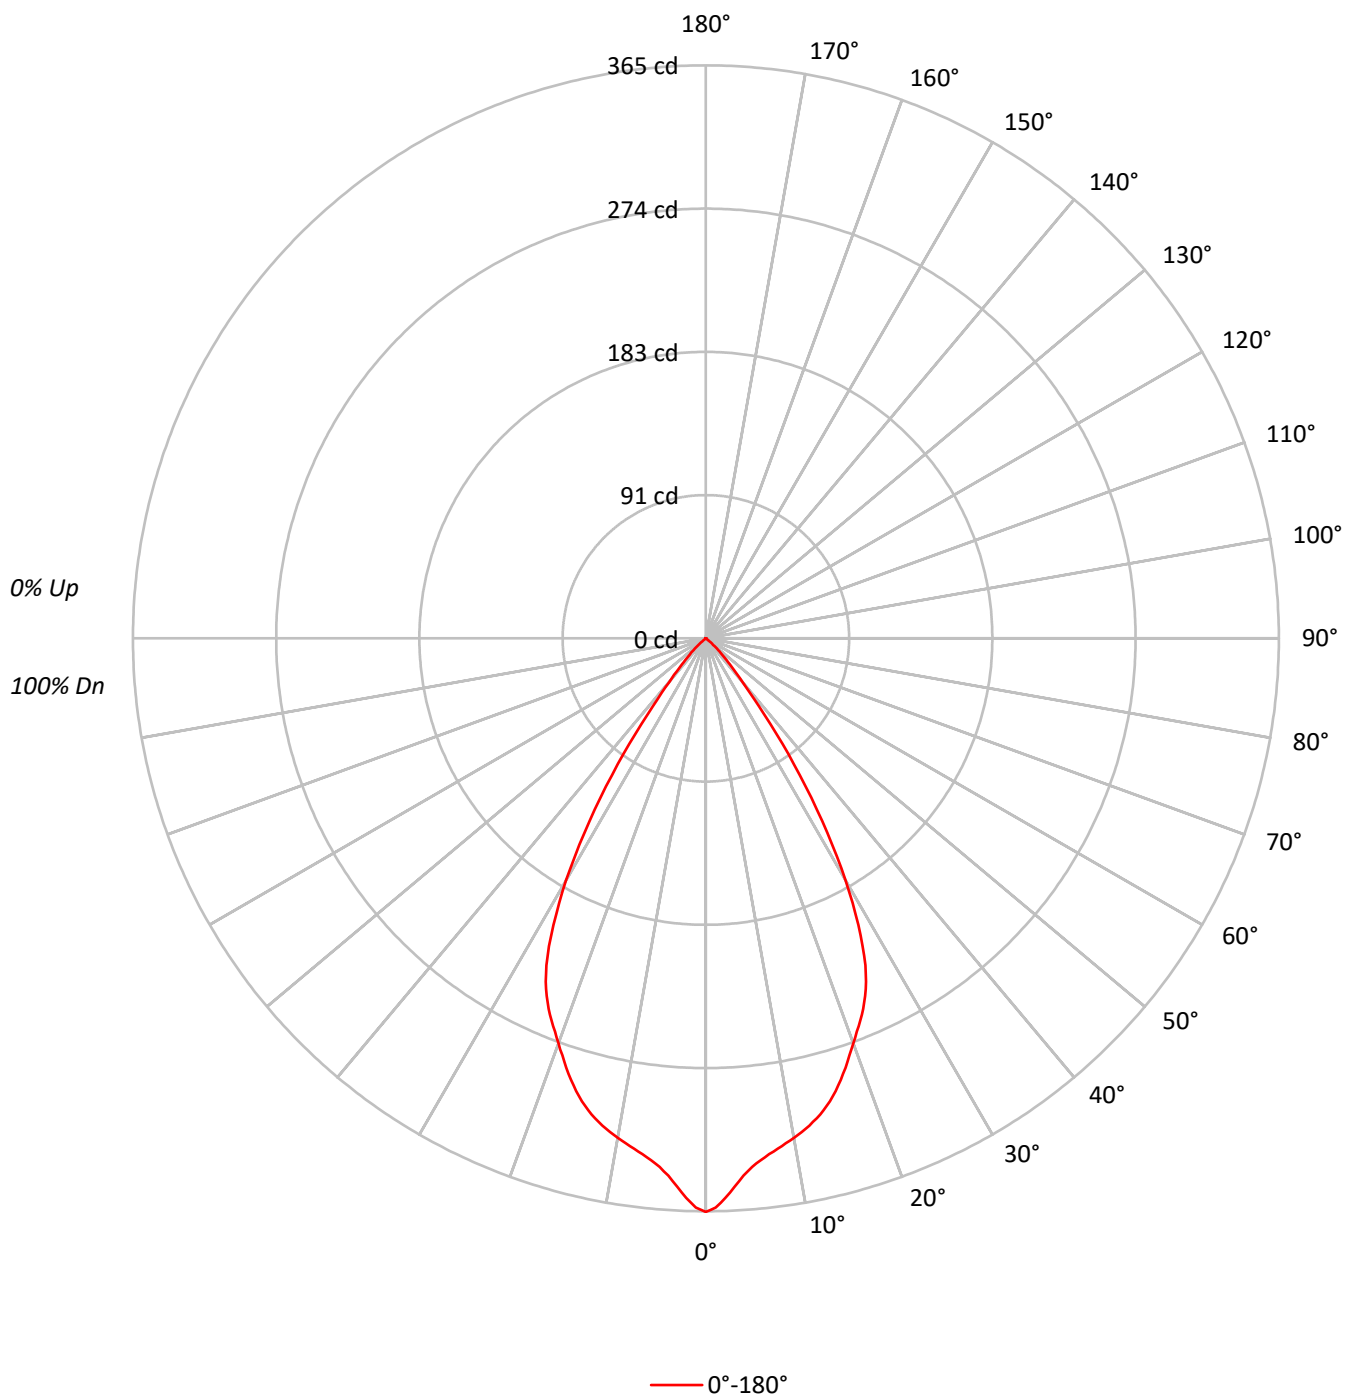

TEST NUMBER: P1253677

CATALOG NUMBER: P3AS02R659035DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	106	111	109	107	105	105	103	102		101	100	99		98
2	108	104	100	96	106	102	98	95	99	96	93		96	93	91		93
3	103	97	92	88	101	95	91	88	93	89	86		90	87	85		88
4	98	91	85	81	96	90	85	81	87	83	80		85	82	79		84
5	93	85	79	75	92	84	79	75	82	78	74		81	77	74		79
6	89	80	74	70	87	79	74	70	78	73	69		76	72	69		75
7	84	75	70	65	83	75	69	65	73	69	65		72	68	65		71
8	80	71	65	61	79	71	65	61	69	64	61		68	64	61		68
9	77	67	61	58	76	67	61	57	66	61	57		65	60	57		64
10	73	64	58	54	72	63	58	54	62	57	54		62	57	54		61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	80125
5°	74400
10°	71943
15°	69331
20°	64102
25°	58407
30°	45121
35°	26154
40°	10391
45°	4435
50°	1058
55°	153
60°	88
65°	52
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4435 cd/sqm

TEST NUMBER: P1253677

CATALOG NUMBER: P3AS02R659035DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	31.9	10.7
10°-20°	85.1	28.5
20°-30°	107.7	36.0
30°-40°	61.3	20.5
40°-50°	12.2	4.1
50°-60°	0.6	0.2
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	224.7	75.1
0°-40°	286.0	95.7
0°-60°	298.8	100.0
0°-90°	299.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	299.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	365	
5°	338	32
15°	305	85
25°	241	108
35°	98	61
45°	14	12
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1253677

CATALOG NUMBER: P3AS02R659035DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	365.4
1°	362.7
2°	356.8
3°	349.9
4°	343.1
5°	338.0
6°	334.2
7°	331.1
8°	328.4
9°	325.7
10°	323.1
11°	320.3
12°	317.3
13°	313.8
14°	309.9
15°	305.4
16°	300.0
17°	294.1
18°	287.7
19°	280.9
20°	274.7
21°	268.3
22°	262.5
23°	256.5
24°	249.5
25°	241.4
26°	231.7
27°	220.0
28°	206.8
29°	192.8
30°	178.2
31°	162.1
32°	146.1
32.5°	137.9
33°	129.9
34°	113.7
35°	97.7
36°	83.0
37°	68.3
37.5°	60.8
38°	54.8
39°	44.4
40°	36.3
42.5°	22.4
45°	14.3



TEST NUMBER: P1253677

CATALOG NUMBER: P3AS02R659035DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	8.4
50°	3.1
52.5°	0.6
55°	0.4
57.5°	0.2
60°	0.2
62.5°	0.2
65°	0.1
67.5°	0.1
70°	0.1
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)