

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253843

Luminaire Tested: P3AS05R259035DE010 E3CB1MW

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1253843  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R259035DE010 E3CB1MW  
Description: 3in Adjustable LED luminaire with, R25 optic, 3500K CCT AND, 90CRI , E3CB1MW TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 655.9 lumens  
Efficiency: N/A  
Efficacy: 91.1 lumens/watt  
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1253843

CATALOG NUMBER: P3AS05R259035DE010 E3CB1MW

### Luminous Intensity Polar Plot

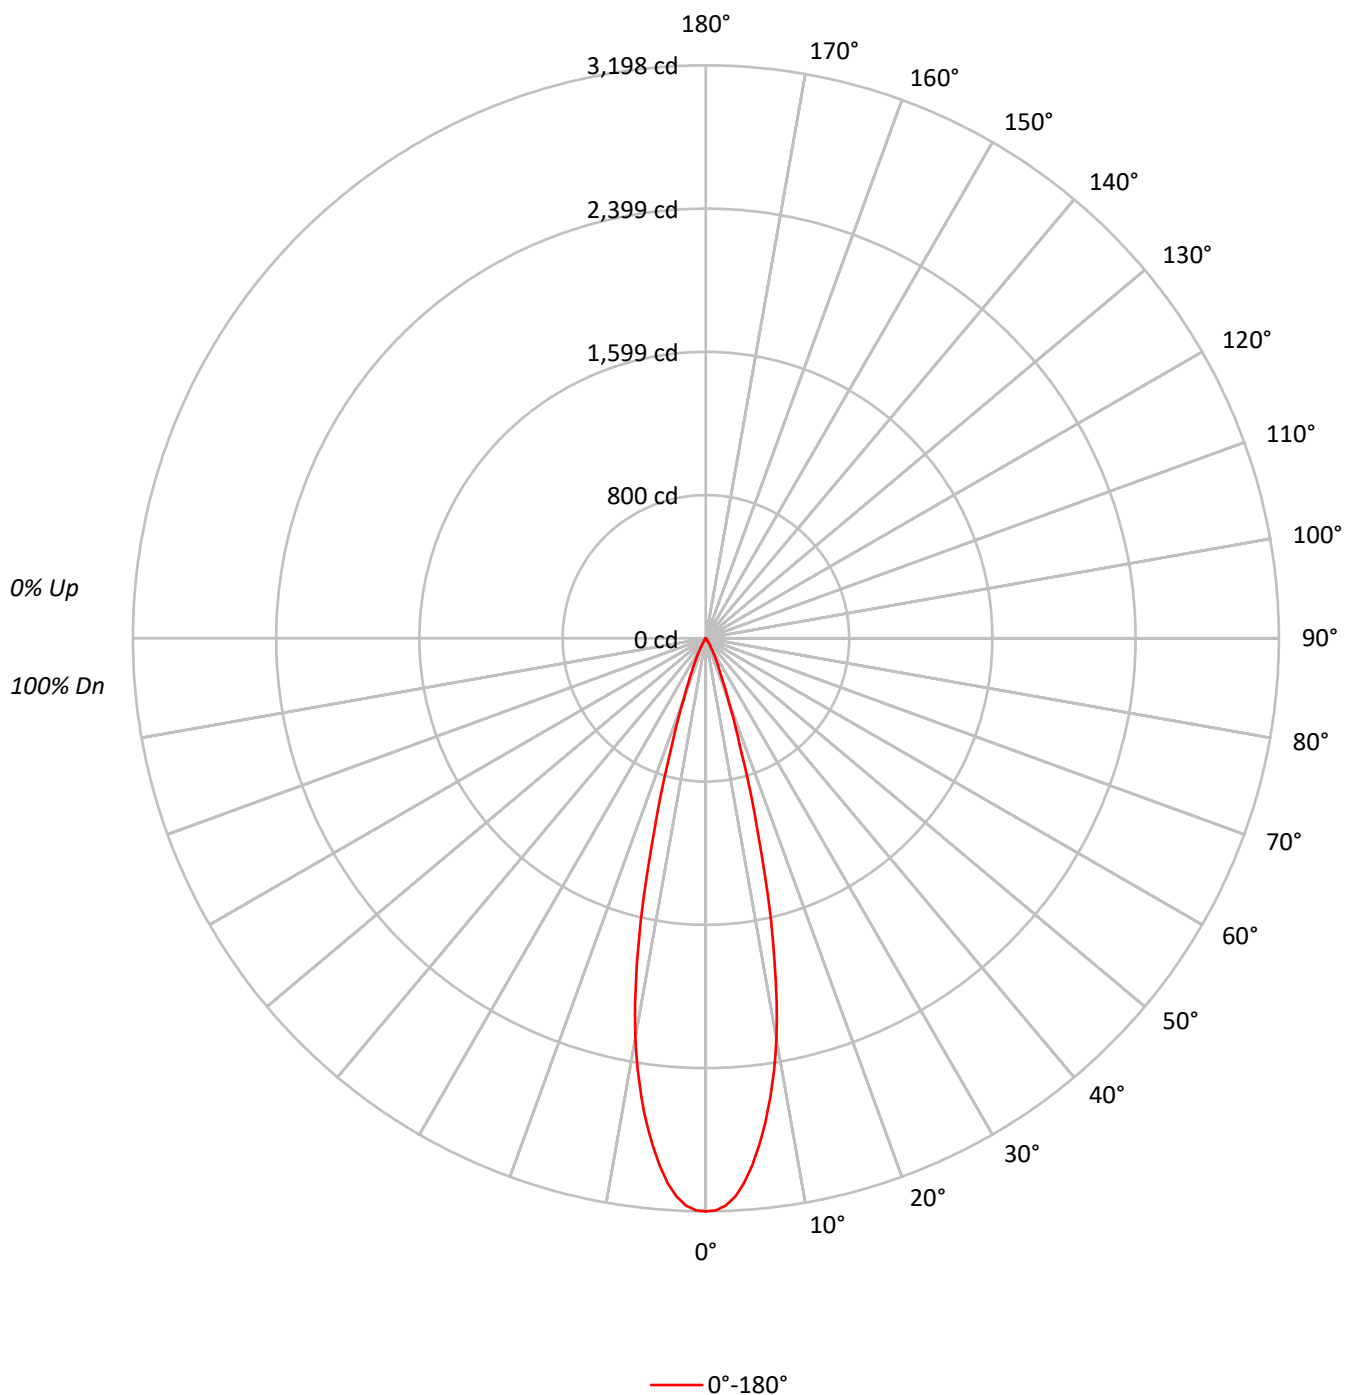

TEST NUMBER: P1253843

CATALOG NUMBER: P3AS05R259035DE010 E3CB1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 99 | 99 |
| 1   | 115 | 113 | 111 | 110 | 113 | 111 | 109 | 108 | 107 | 106 | 105 | 103 | 103 | 102 | 100 | 99  | 99  | 97  | 97 | 97 |
| 2   | 112 | 108 | 105 | 103 | 110 | 107 | 104 | 102 | 104 | 102 | 100 | 101 | 99  | 98  | 98  | 97  | 96  | 94  | 94 | 94 |
| 3   | 108 | 104 | 101 | 98  | 107 | 103 | 100 | 97  | 100 | 98  | 96  | 98  | 96  | 94  | 96  | 94  | 93  | 92  | 92 | 92 |
| 4   | 105 | 100 | 97  | 94  | 104 | 99  | 96  | 93  | 97  | 95  | 92  | 96  | 93  | 91  | 94  | 92  | 90  | 89  | 89 | 89 |
| 5   | 103 | 97  | 93  | 90  | 101 | 96  | 93  | 90  | 95  | 92  | 89  | 93  | 91  | 89  | 92  | 90  | 88  | 87  | 87 | 87 |
| 6   | 100 | 94  | 90  | 87  | 99  | 93  | 90  | 87  | 92  | 89  | 87  | 91  | 88  | 86  | 90  | 87  | 86  | 85  | 85 | 85 |
| 7   | 97  | 91  | 88  | 85  | 96  | 91  | 87  | 85  | 90  | 87  | 84  | 89  | 86  | 84  | 88  | 85  | 83  | 83  | 83 | 83 |
| 8   | 95  | 89  | 85  | 83  | 94  | 89  | 85  | 82  | 88  | 84  | 82  | 87  | 84  | 82  | 86  | 83  | 81  | 81  | 81 | 81 |
| 9   | 93  | 87  | 83  | 80  | 92  | 86  | 83  | 80  | 86  | 82  | 80  | 85  | 82  | 80  | 84  | 82  | 80  | 79  | 79 | 79 |
| 10  | 91  | 85  | 81  | 78  | 90  | 84  | 81  | 78  | 84  | 80  | 78  | 83  | 80  | 78  | 82  | 80  | 78  | 77  | 77 | 77 |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 701369 |
| 5°  | 650494 |
| 10° | 504466 |
| 15° | 252964 |
| 20° | 83097  |
| 25° | 33050  |
| 30° | 12407  |
| 35° | 3587   |
| 40° | 1632   |
| 45° | 651    |
| 50° | 512    |
| 55° | 382    |
| 60° | 439    |
| 65° | 519    |
| 70° | 321    |
| 75° | 424    |
| 80° | 631    |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 651 cd/sqm

TEST NUMBER: P1253843

CATALOG NUMBER: P3AS05R259035DE010 E3CB1MW

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 259.9  | 39.6      |
| 10°-20°   | 310.1  | 47.3      |
| 20°-30°   | 69.9   | 10.7      |
| 30°-40°   | 11.3   | 1.7       |
| 40°-50°   | 2.0    | 0.3       |
| 50°-60°   | 1.1    | 0.2       |
| 60°-70°   | 0.9    | 0.1       |
| 70°-80°   | 0.5    | 0.1       |
| 80°-90°   | 0.1    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 640.0  | 97.6      |
| 0°-40°    | 651.3  | 99.3      |
| 0°-60°    | 654.4  | 99.8      |
| 0°-90°    | 655.9  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 655.9  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 3198 |      |
| 5°  | 2955 | 260  |
| 15° | 1114 | 310  |
| 25° | 137  | 70   |
| 35° | 13   | 11   |
| 45° | 2    | 2    |
| 55° | 1    | 1    |
| 65° | 1    | 1    |
| 75° | 0    | 1    |
| 85° | 0    | 0    |
| 90° | 0    |      |

TEST NUMBER: P1253843

CATALOG NUMBER: P3AS05R259035DE010 E3CB1MW

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 3198.5 |
| 1°    | 3193.3 |
| 2°    | 3167.5 |
| 3°    | 3120.1 |
| 4°    | 3048.5 |
| 5°    | 2955.2 |
| 6°    | 2843.9 |
| 7°    | 2723.3 |
| 8°    | 2585.2 |
| 9°    | 2434.1 |
| 10°   | 2265.6 |
| 11°   | 2071.3 |
| 12°   | 1847.6 |
| 13°   | 1613.7 |
| 14°   | 1362.7 |
| 15°   | 1114.3 |
| 17.5° | 634.9  |
| 20°   | 356.1  |
| 22.5° | 214.9  |
| 25°   | 136.6  |
| 27.5° | 84.0   |
| 30°   | 49.0   |
| 32.5° | 25.8   |
| 35°   | 13.4   |
| 37.5° | 8.8    |
| 40°   | 5.7    |
| 42.5° | 3.6    |
| 45°   | 2.1    |
| 47.5° | 1.5    |
| 50°   | 1.5    |
| 52.5° | 1.5    |
| 55°   | 1.0    |
| 57.5° | 1.0    |
| 60°   | 1.0    |
| 62.5° | 1.0    |
| 65°   | 1.0    |
| 67.5° | 1.0    |
| 70°   | 0.5    |
| 72.5° | 0.5    |
| 75°   | 0.5    |
| 77.5° | 0.5    |
| 80°   | 0.5    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |



TEST NUMBER: P1253843

CATALOG NUMBER: P3AS05R259035DE010 E3CB1MW

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)