

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253901

Luminaire Tested: P3AS05R309035DE010 E3DLP1WMH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1253901  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-13)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS05R309035DE010 E3DLP1WMH  
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 90CRI , E3DLP1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 332.0 lumens  
Efficiency: N/A  
Efficacy: 46.1 lumens/watt  
Spacing Criteria (0/90/45): 0.66 / 0.66 / 0.7  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.2  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1253901

CATALOG NUMBER: P3AS05R309035DE010 E3DLP1WMH

### Luminous Intensity Polar Plot

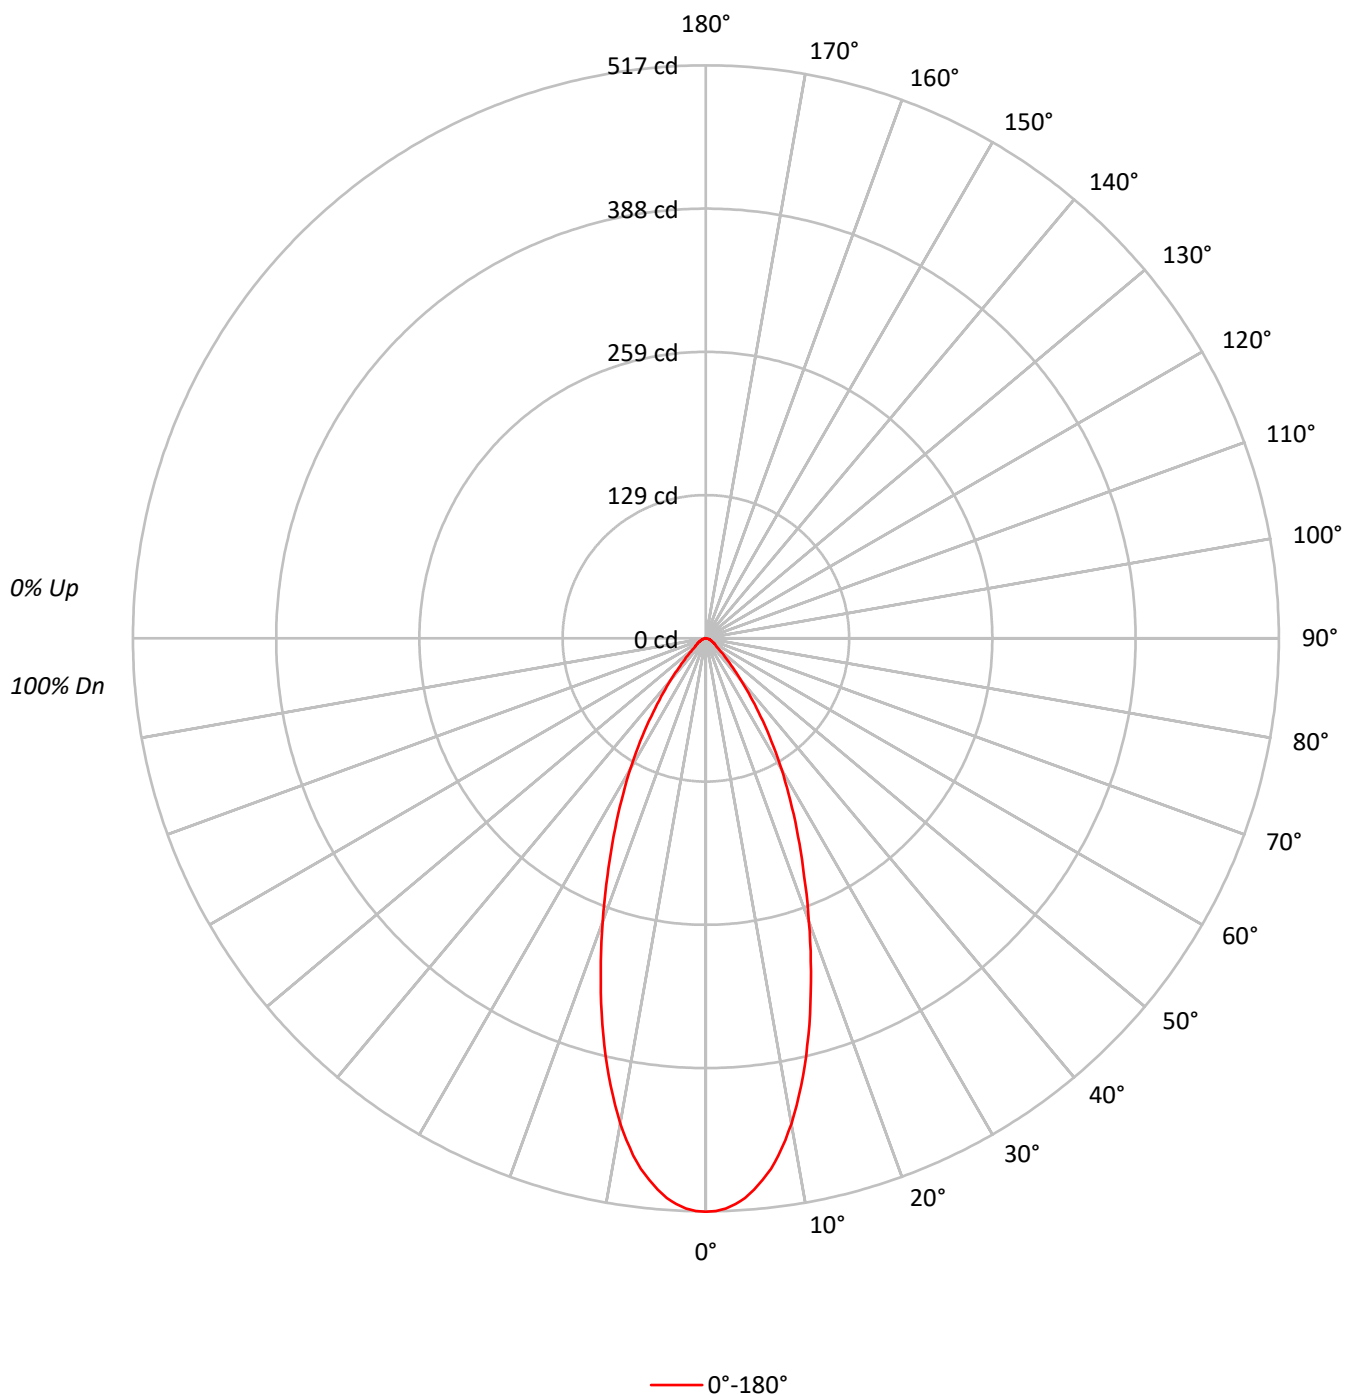

TEST NUMBER: P1253901

CATALOG NUMBER: P3AS05R309035DE010 E3DLP1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|--|-----|-----|-----|--|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |  | 20  |     |     |  | 20  |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |  | 30  |     |     |  | 10  |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  |
| RCR |     |     |     |     |     |     |     |     |     |     |     |  |     |     |     |  |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 |
| 1   | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 101 |  | 100 | 99  | 98  |  | 97  |
| 2   | 107 | 102 | 98  | 95  | 105 | 101 | 97  | 94  | 97  | 94  | 92  |  | 94  | 92  | 90  |  | 92  |
| 3   | 102 | 95  | 90  | 86  | 100 | 94  | 89  | 85  | 91  | 87  | 84  |  | 89  | 86  | 83  |  | 87  |
| 4   | 97  | 89  | 84  | 79  | 95  | 88  | 83  | 79  | 86  | 81  | 78  |  | 84  | 80  | 77  |  | 82  |
| 5   | 92  | 84  | 78  | 73  | 90  | 83  | 77  | 73  | 81  | 76  | 72  |  | 79  | 75  | 72  |  | 78  |
| 6   | 88  | 79  | 73  | 68  | 86  | 78  | 72  | 68  | 76  | 71  | 68  |  | 75  | 71  | 67  |  | 74  |
| 7   | 83  | 74  | 68  | 64  | 82  | 74  | 68  | 64  | 72  | 67  | 63  |  | 71  | 67  | 63  |  | 70  |
| 8   | 80  | 70  | 64  | 60  | 78  | 70  | 64  | 60  | 69  | 63  | 60  |  | 68  | 63  | 60  |  | 67  |
| 9   | 76  | 67  | 61  | 57  | 75  | 66  | 60  | 57  | 65  | 60  | 56  |  | 64  | 60  | 56  |  | 63  |
| 10  | 73  | 63  | 58  | 54  | 72  | 63  | 57  | 54  | 62  | 57  | 54  |  | 61  | 57  | 53  |  | 61  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 113456 |
| 5°  | 109927 |
| 10° | 99041  |
| 15° | 81930  |
| 20° | 63426  |
| 25° | 47591  |
| 30° | 34537  |
| 35° | 23022  |
| 40° | 14141  |
| 45° | 8311   |
| 50° | 5083   |
| 55° | 4129   |
| 60° | 3596   |
| 65° | 2958   |
| 70° | 2629   |
| 75° | 2626   |
| 80° | 1894   |
| 85° | 2516   |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 8311 cd/sqm

TEST NUMBER: P1253901

CATALOG NUMBER: P3AS05R309035DE010 E3DLP1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 45.9   | 13.8      |
| 10°-20°   | 99.4   | 29.9      |
| 20°-30°   | 90.4   | 27.2      |
| 30°-40°   | 54.7   | 16.5      |
| 40°-50°   | 21.9   | 6.6       |
| 50°-60°   | 9.7    | 2.9       |
| 60°-70°   | 5.8    | 1.8       |
| 70°-80°   | 3.2    | 1.0       |
| 80°-90°   | 0.9    | 0.3       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 235.8  | 71.0      |
| 0°-40°    | 290.4  | 87.5      |
| 0°-60°    | 322.0  | 97.0      |
| 0°-90°    | 332.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 332.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 517 |      |
| 5°  | 499 | 46   |
| 15° | 361 | 99   |
| 25° | 197 | 90   |
| 35° | 86  | 55   |
| 45° | 27  | 22   |
| 55° | 11  | 10   |
| 65° | 6   | 6    |
| 75° | 3   | 3    |
| 85° | 1   | 1    |
| 90° | 0   |      |

TEST NUMBER: P1253901

CATALOG NUMBER: P3AS05R309035DE010 E3DLP1WMH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 517.4 |
| 1°    | 516.9 |
| 2°    | 514.8 |
| 3°    | 511.2 |
| 4°    | 506.1 |
| 5°    | 499.4 |
| 6°    | 491.1 |
| 7°    | 482.4 |
| 8°    | 471.0 |
| 9°    | 458.2 |
| 10°   | 444.8 |
| 11°   | 429.3 |
| 12°   | 412.9 |
| 13°   | 396.4 |
| 14°   | 378.4 |
| 15°   | 360.9 |
| 17.5° | 315.1 |
| 20°   | 271.8 |
| 22.5° | 231.7 |
| 25°   | 196.7 |
| 27.5° | 164.7 |
| 30°   | 136.4 |
| 32.5° | 110.2 |
| 35°   | 86.0  |
| 37.5° | 65.9  |
| 40°   | 49.4  |
| 42.5° | 36.0  |
| 45°   | 26.8  |
| 47.5° | 20.1  |
| 50°   | 14.9  |
| 52.5° | 11.8  |
| 55°   | 10.8  |
| 57.5° | 9.3   |
| 60°   | 8.2   |
| 62.5° | 6.7   |
| 65°   | 5.7   |
| 67.5° | 5.1   |
| 70°   | 4.1   |
| 72.5° | 3.6   |
| 75°   | 3.1   |
| 77.5° | 2.6   |
| 80°   | 1.5   |
| 82.5° | 1.0   |
| 85°   | 1.0   |
| 87.5° | 0.5   |



TEST NUMBER: P1253901

CATALOG NUMBER: P3AS05R309035DE010 E3DLP1WMH

CANDELA DISTRIBUTION (continued):

0°  
90° | 0.0

(END OF REPORT)