

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1253999

Luminaire Tested: P3AS05R509035DE010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1253999
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-31)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R509035DE010 E3DL1H
Description: 3in Adjustable LED luminaire with, R50 optic, 3500K CCT AND, 90CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 580.0 lumens
Efficiency: N/A
Efficacy: 80.6 lumens/watt
Spacing Criteria (0/90/45): 0.77 / 0.77 / 0.75
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1253999
CATALOG NUMBER: P3AS05R509035DE010 E3DL1H

Luminous Intensity Polar Plot

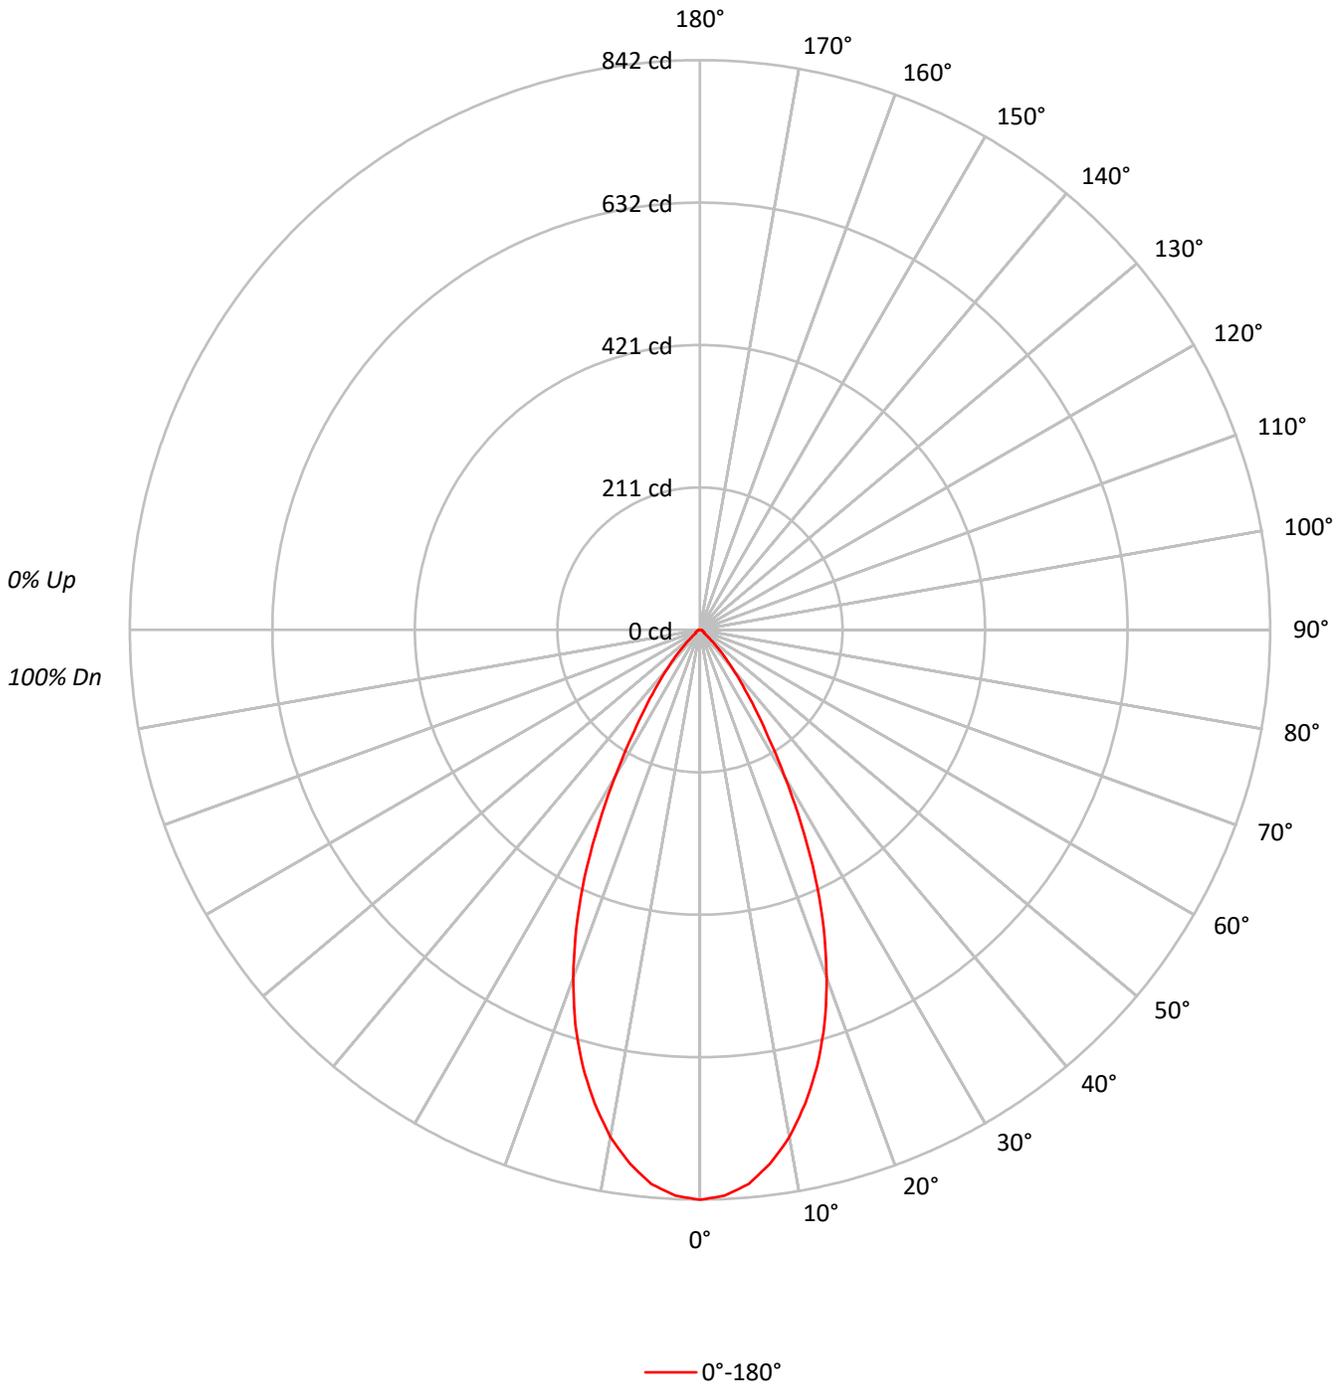



TEST NUMBER: P1253999
 CATALOG NUMBER: P3AS05R509035DE010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94				94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87				87
3	103	97	92	88	101	95	91	87	93	89	86	90	87	84	88	85	83	82				82
4	98	91	85	81	96	90	85	81	87	83	80	85	82	79	84	80	78	76				76
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72				72
6	89	80	75	71	88	80	74	70	78	73	70	77	73	69	75	72	69	67				67
7	85	76	70	66	84	75	70	66	74	69	66	73	69	65	72	68	65	64				64
8	81	72	66	62	80	71	66	62	70	65	62	69	65	62	68	64	61	60				60
9	78	68	63	59	76	68	62	59	67	62	59	66	62	58	65	61	58	57				57
10	74	65	59	56	73	65	59	56	64	59	55	63	58	55	62	58	55	54				54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	184656
5°	180937
10°	169491
15°	151715
20°	127668
25°	97457
30°	63326
35°	37557
40°	21698
45°	10885
50°	4060
55°	3173
60°	2938
65°	2698
70°	2629
75°	2626
80°	2652
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 10885 cd/sqm



TEST NUMBER: P1253999
 CATALOG NUMBER: P3AS05R509035DE010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.5	13.2
10°-20°	184.8	31.9
20°-30°	181.3	31.3
30°-40°	91.4	15.8
40°-50°	28.9	5.0
50°-60°	7.5	1.3
60°-70°	5.3	0.9
70°-80°	3.3	0.6
80°-90°	1.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	442.6	76.3
0°-40°	534.0	92.1
0°-60°	570.3	98.3
0°-90°	580.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	580.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	842	
5°	822	76
15°	668	185
25°	403	181
35°	140	91
45°	35	29
55°	8	7
65°	5	5
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P1253999
CATALOG NUMBER: P3AS05R509035DE010 E3DL1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	842.1
2.5°	837.0
5°	822.0
7.5°	795.2
10°	761.2
12.5°	717.3
15°	668.3
17.5°	611.6
20°	547.1
22.5°	477.5
25°	402.8
27.5°	323.3
30°	250.1
32.5°	188.2
35°	140.3
37.5°	103.7
40°	75.8
42.5°	53.6
45°	35.1
47.5°	20.1
50°	11.9
52.5°	8.8
55°	8.3
57.5°	7.2
60°	6.7
62.5°	6.2
65°	5.2
67.5°	4.6
70°	4.1
72.5°	3.6
75°	3.1
77.5°	2.6
80°	2.1
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)