

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254050

Luminaire Tested: P3AS05R609035DE010 E3CD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254050
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-40)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R609035DE010 E3CD1MW
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 90CRI , E3CD1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 666.0 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.91
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254050
CATALOG NUMBER: P3AS05R609035DE010 E3CD1MW

Luminous Intensity Polar Plot

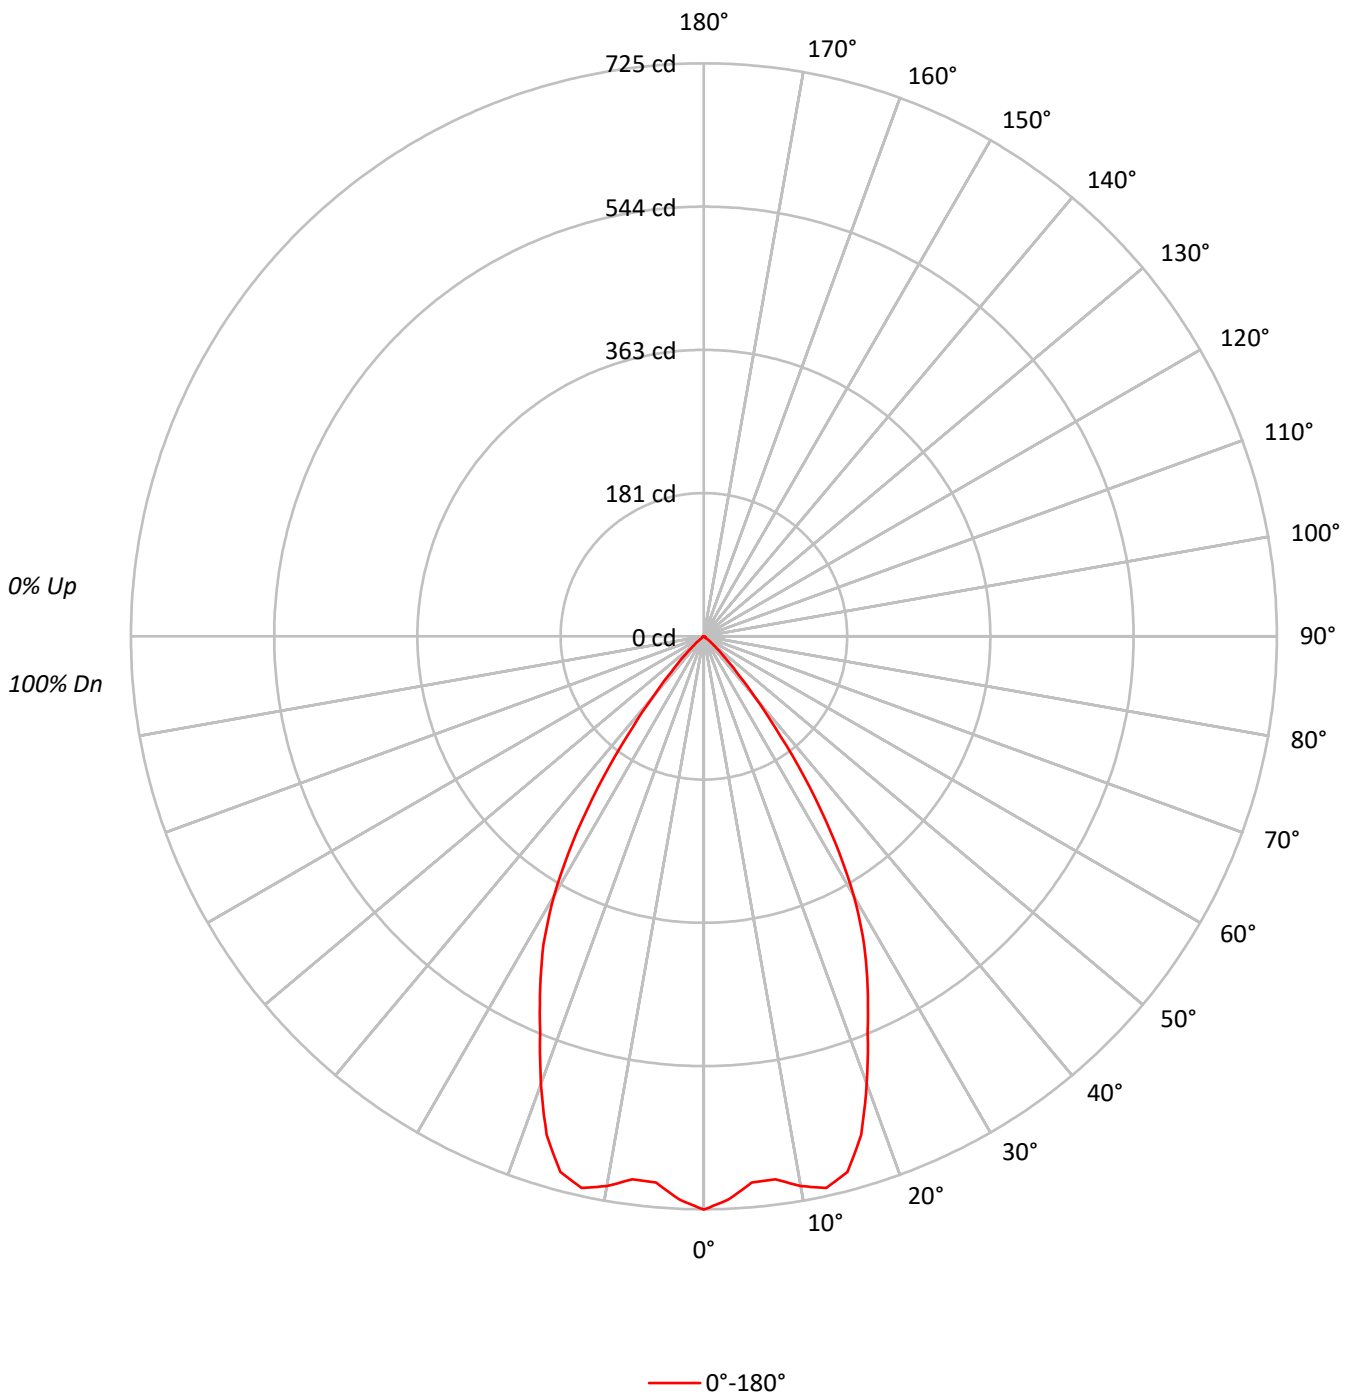



TEST NUMBER: P1254050
 CATALOG NUMBER: P3AS05R609035DE010 E3CD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94				94
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87				87
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81				81
4	98	90	85	81	96	89	84	80	87	83	79	85	81	78	83	80	77	76				76
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71				71
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	70	68	66				66
7	84	75	69	64	82	74	68	64	73	68	64	71	67	64	70	66	63	62				62
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58				58
9	76	66	61	57	75	66	60	56	65	60	56	64	59	56	63	59	56	55				55
10	72	63	57	53	71	62	57	53	62	56	53	61	56	53	60	56	53	51				51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	159044
5°	152718
10°	157245
15°	159274
20°	140642
25°	118531
30°	96116
35°	62613
40°	28740
45°	11009
50°	3684
55°	994
60°	921
65°	778
70°	641
75°	847
80°	631
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 11009 cd/sqm



TEST NUMBER: P1254050
 CATALOG NUMBER: P3AS05R609035DE010 E3CD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.8	10.0
10°-20°	192.1	28.8
20°-30°	224.1	33.7
30°-40°	144.6	21.7
40°-50°	32.4	4.9
50°-60°	3.3	0.5
60°-70°	1.5	0.2
70°-80°	0.9	0.1
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	483.0	72.5
0°-40°	627.6	94.2
0°-60°	663.3	99.6
0°-90°	666.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	666.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	725	
5°	694	67
15°	702	192
25°	490	224
35°	234	145
45°	36	32
55°	3	3
65°	2	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1254050
CATALOG NUMBER: P3AS05R609035DE010 E3CD1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	725.3
2.5°	713.4
5°	693.8
7.5°	692.8
10°	706.2
12.5°	715.0
15°	701.6
17.5°	661.4
20°	602.7
22.5°	541.4
25°	489.9
27.5°	439.4
30°	379.6
32.5°	309.6
35°	233.9
37.5°	159.7
40°	100.4
42.5°	60.3
45°	35.5
47.5°	20.6
50°	10.8
52.5°	3.6
55°	2.6
57.5°	2.1
60°	2.1
62.5°	1.5
65°	1.5
67.5°	1.5
70°	1.0
72.5°	1.0
75°	1.0
77.5°	0.5
80°	0.5
82.5°	0.5
85°	0.5
87.5°	0.0
90°	0.0

(END OF REPORT)