

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254113

Luminaire Tested: P3AS05R709035DE010 E3D1WMH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254113
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-17)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R709035DE010 E3D1WMH
Description: 3in Adjustable LED luminaire with, R70 optic, 3500K CCT AND, 90CRI , E3D1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 615.1 lumens
Efficiency: N/A
Efficacy: 85.4 lumens/watt
Spacing Criteria (0/90/45): 1.02 / 1.02 / 1.06
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254113

CATALOG NUMBER: P3AS05R709035DE010 E3D1WMH

Luminous Intensity Polar Plot

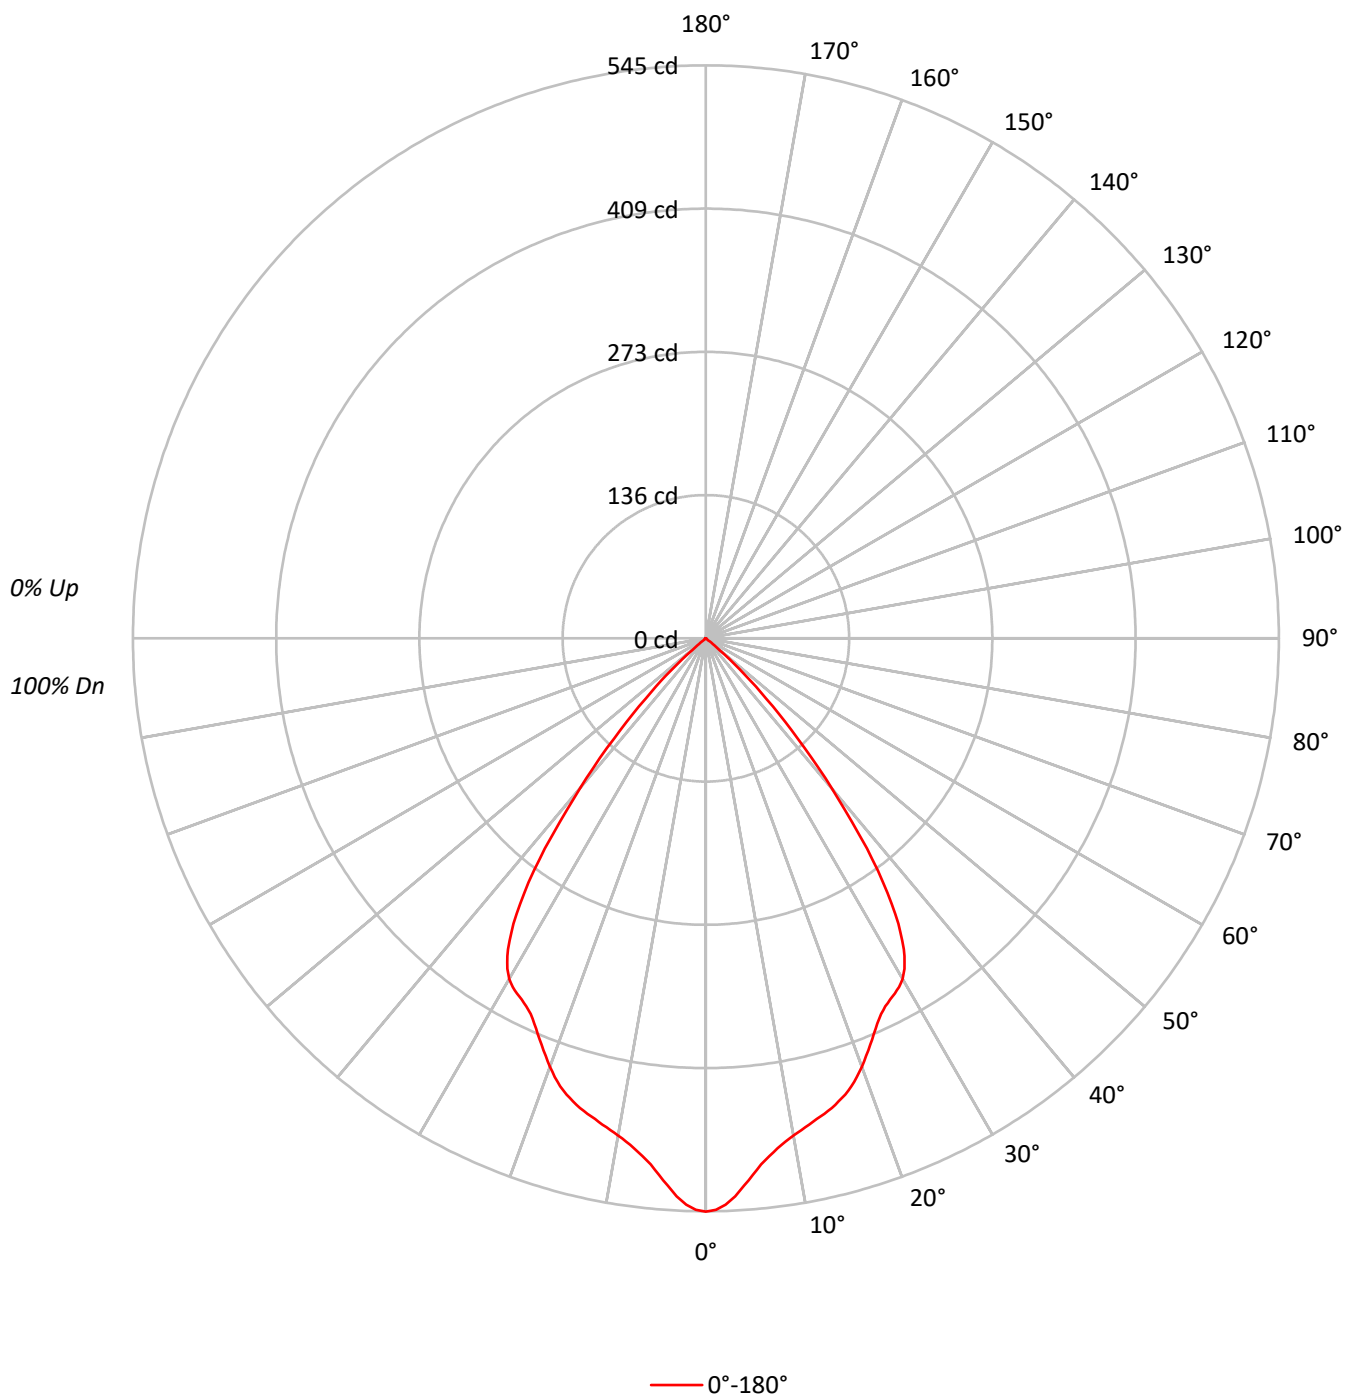

TEST NUMBER: P1254113

CATALOG NUMBER: P3AS05R709035DE010 E3D1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	108	105	111	108	106	104	104	102	100		100	99	97		97
2	107	102	98	94	105	100	96	93	97	94	91		94	91	89		91
3	101	94	89	85	99	93	88	84	90	86	83		88	84	81		86
4	95	87	81	77	94	86	81	76	84	79	76		82	78	75		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	75	69	64	83	75	69	64	73	68	64		72	67	63		70
7	80	70	64	59	79	70	63	59	68	63	59		67	62	58		66
8	76	66	59	55	75	65	59	55	64	58	54		63	58	54		62
9	72	61	55	51	71	61	55	51	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		55	50	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	119574
5°	112767
10°	106923
15°	104995
20°	101205
25°	95401
30°	94723
35°	82503
40°	53357
45°	25212
50°	3548
55°	306
60°	219
65°	259
70°	192
75°	254
80°	379
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 25212 cd/sqm

TEST NUMBER: P1254113

CATALOG NUMBER: P3AS05R709035DE010 E3D1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.8	7.8
10°-20°	129.9	21.1
20°-30°	183.7	29.9
30°-40°	184.6	30.0
40°-50°	66.4	10.8
50°-60°	1.8	0.3
60°-70°	0.4	0.1
70°-80°	0.3	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	361.5	58.8
0°-40°	546.1	88.8
0°-60°	614.3	99.9
0°-90°	615.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	615.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	545	
5°	512	48
15°	462	130
25°	394	184
35°	308	185
45°	81	66
55°	1	2
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1254113

CATALOG NUMBER: P3AS05R709035DE010 E3D1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	545.3
1°	543.8
2°	539.0
3°	531.4
4°	521.8
5°	512.3
6°	503.2
7°	496.1
8°	489.8
9°	484.7
10°	480.2
11°	476.4
12°	472.8
13°	469.3
14°	466.0
15°	462.5
16°	458.2
17°	453.7
18°	448.1
19°	441.3
20°	433.7
21°	425.4
22°	417.0
23°	408.9
24°	401.1
25°	394.3
26°	389.5
27°	385.7
28°	382.7
29°	379.1
30°	374.1
31°	366.8
32°	356.4
32.5°	350.6
33°	342.8
34°	327.4
35°	308.2
36°	286.9
37°	262.9
37.5°	251.8
38°	236.7
39°	209.6
40°	186.4
42.5°	129.1
45°	81.3



TEST NUMBER: P1254113

CATALOG NUMBER: P3AS05R709035DE010 E3D1WMH

CANDELA DISTRIBUTION (continued):

	0°
47.5°	43.7
50°	10.4
52.5°	1.3
55°	0.8
57.5°	0.8
60°	0.5
62.5°	0.5
65°	0.5
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.3
77.5°	0.3
80°	0.3
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)