

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254124

Luminaire Tested: P3AS05R709035DE010 E3DLP1WH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254124
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS05R709035DE010 E3DLP1WH
Description: 3in Adjustable LED luminaire with, R70 optic, 3500K CCT AND, 90CRI , E3DLP1WH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 519.0 lumens
Efficiency: N/A
Efficacy: 72.1 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254124

CATALOG NUMBER: P3AS05R709035DE010 E3DLP1WH

Luminous Intensity Polar Plot

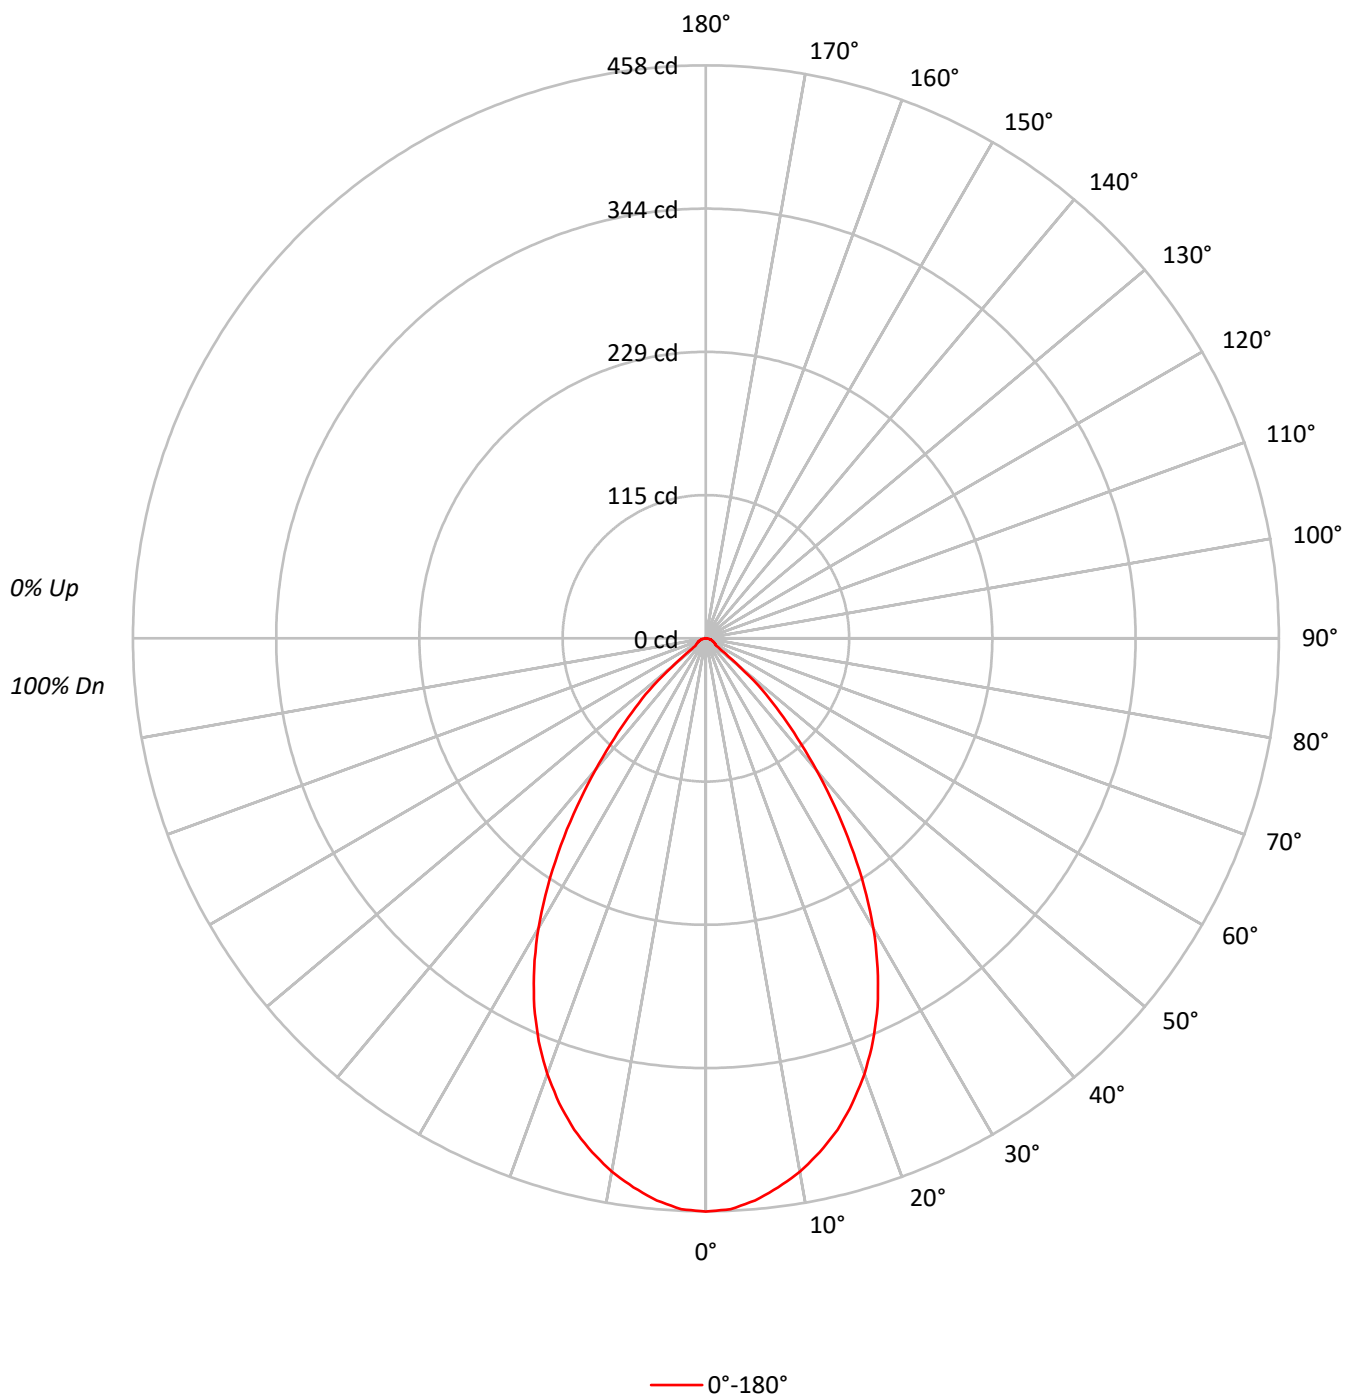

TEST NUMBER: P1254124

CATALOG NUMBER: P3AS05R709035DE010 E3DLP1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	100		100	98	97		96
2	106	101	96	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	88	83	98	92	87	82	89	85	81		86	83	80		84
4	94	86	80	75	93	85	79	75	83	78	74		81	76	73		79
5	89	80	73	69	87	79	73	68	77	72	68		75	71	67		74
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	53	74	64	58	53	63	57	53		62	57	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	49	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	100474
5°	99273
10°	96391
15°	92327
20°	86481
25°	78561
30°	67859
35°	54074
40°	39388
45°	25894
50°	12145
55°	3747
60°	3596
65°	3476
70°	3334
75°	3474
80°	3283
85°	2516

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 25894 cd/sqm

TEST NUMBER: P1254124

CATALOG NUMBER: P3AS05R709035DE010 E3DLP1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	42.5	8.2
10°-20°	113.8	21.9
20°-30°	147.9	28.5
30°-40°	125.5	24.2
40°-50°	64.7	12.5
50°-60°	12.5	2.4
60°-70°	6.8	1.3
70°-80°	4.1	0.8
80°-90°	1.2	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	304.2	58.6
0°-40°	429.7	82.8
0°-60°	506.9	97.7
0°-90°	519.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	519.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	458	
5°	451	42
15°	407	114
25°	325	148
35°	202	126
45°	84	65
55°	10	12
65°	7	7
75°	4	4
85°	1	1
90°	0	

TEST NUMBER: P1254124

CATALOG NUMBER: P3AS05R709035DE010 E3DLP1WH

CANDELA DISTRIBUTION (FULL):

	0°
0°	458.2
2.5°	456.7
5°	451.0
7.5°	442.7
10°	432.9
12.5°	420.6
15°	406.7
17.5°	389.6
20°	370.6
22.5°	348.9
25°	324.7
27.5°	297.4
30°	268.0
32.5°	235.5
35°	202.0
37.5°	169.1
40°	137.6
42.5°	108.2
45°	83.5
47.5°	61.3
50°	35.6
52.5°	15.5
55°	9.8
57.5°	9.3
60°	8.2
62.5°	7.7
65°	6.7
67.5°	6.2
70°	5.2
72.5°	4.6
75°	4.1
77.5°	3.1
80°	2.6
82.5°	1.5
85°	1.0
87.5°	0.5
90°	0.0

(END OF REPORT)