

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254162

Luminaire Tested: P3AS09R159035DE010 E3CD1MB

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1254162  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-4)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R159035DE010 E3CD1MB  
Description: 3in Adjustable LED luminaire with, R15 optic, 3500K CCT AND, 90CRI , E3CD1MB TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 953.1 lumens  
Efficiency: N/A  
Efficacy: 85.9 lumens/watt  
Spacing Criteria (0/90/45): 0.3 / 0.3 / 0.29  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1254162  
CATALOG NUMBER: P3AS09R159035DE010 E3CD1MB

### Luminous Intensity Polar Plot

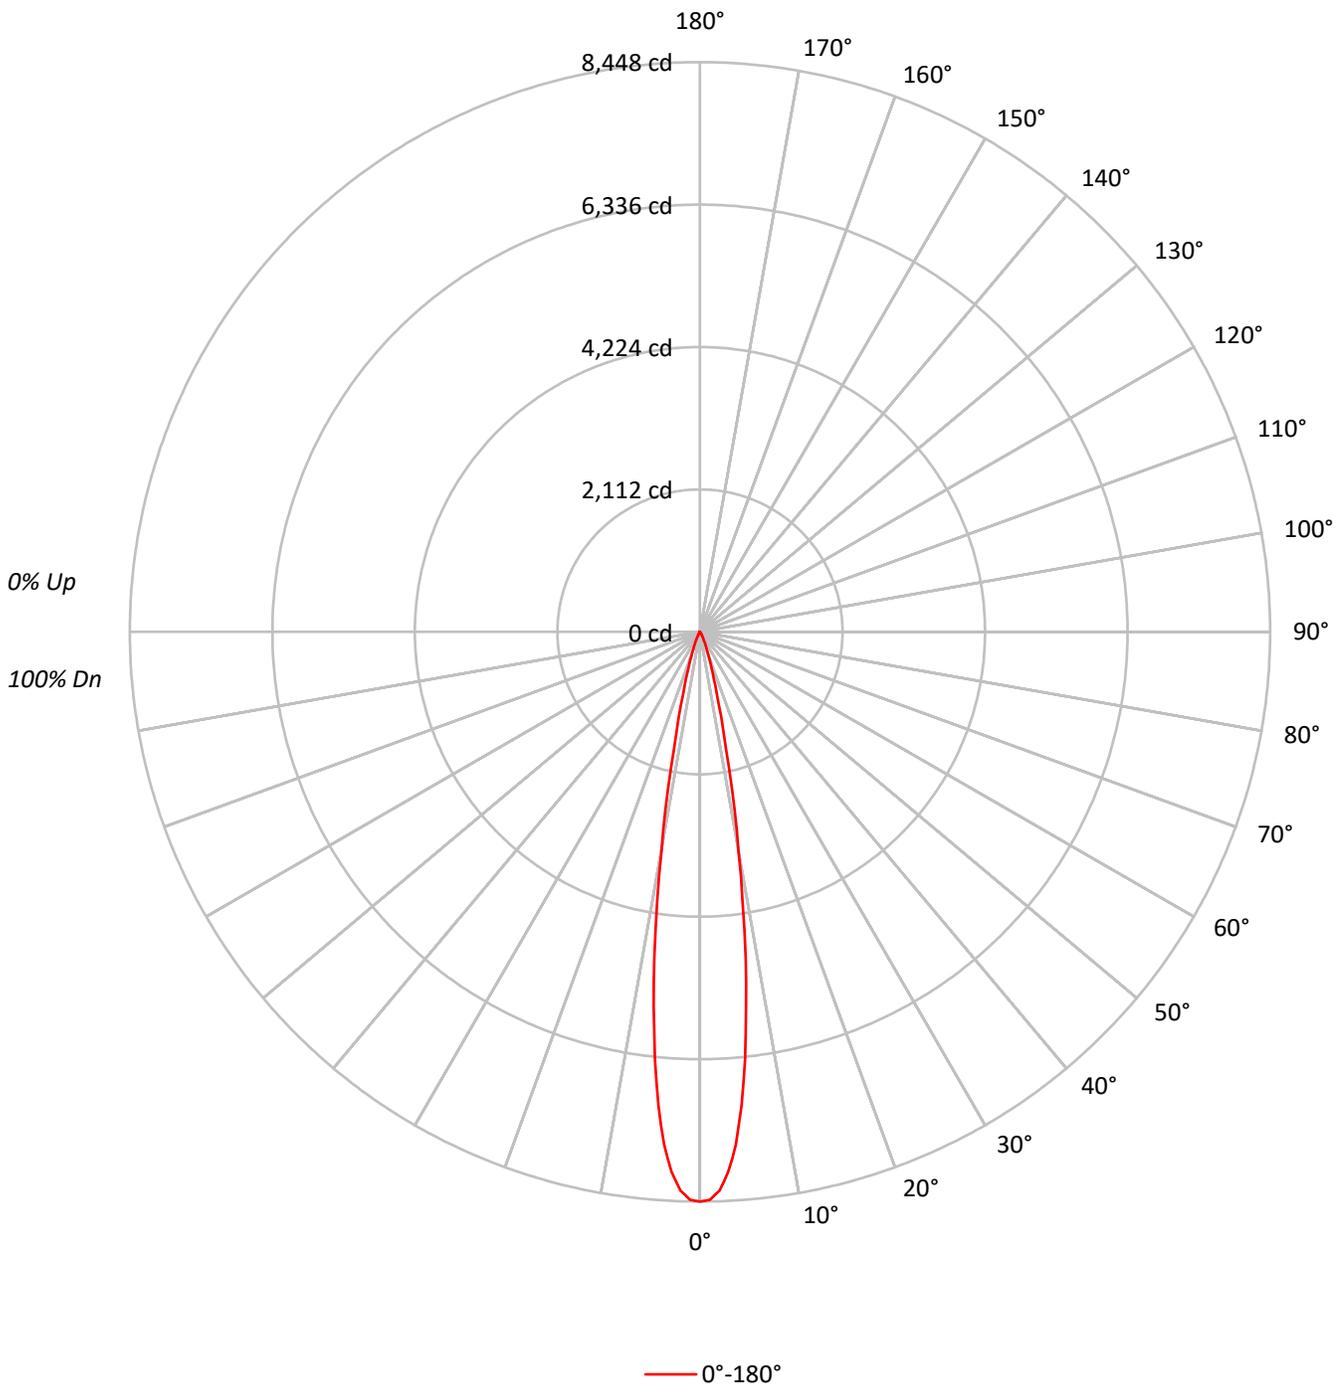



TEST NUMBER: P1254162  
 CATALOG NUMBER: P3AS09R159035DE010 E3CD1MB

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98	98	98	98
2	113	110	107	105	111	108	106	104	105	103	101	102	101	99	99	98	97	96	96	96	96
3	110	106	103	100	108	105	102	100	102	100	98	100	98	97	98	97	95	94	94	94	94
4	107	103	100	97	106	102	99	97	100	97	95	98	96	94	97	95	93	92	92	92	92
5	105	100	97	94	104	99	96	94	98	95	93	96	94	92	95	93	92	91	91	91	91
6	103	98	94	92	102	97	94	92	96	93	91	95	92	91	94	92	90	89	89	89	89
7	101	96	92	90	100	95	92	90	94	91	89	93	91	89	92	90	89	88	88	88	88
8	99	94	90	88	98	93	90	88	92	90	88	92	89	87	91	89	87	86	86	86	86
9	97	92	89	87	97	92	89	86	91	88	86	90	88	86	90	87	86	85	85	85	85
10	96	90	87	85	95	90	87	85	89	87	85	89	86	85	88	86	85	84	84	84	84

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1852395
5°	1552494
10°	731294
15°	220478
20°	81580
25°	31720
30°	11825
35°	3641
40°	1288
45°	713
50°	512
55°	573
60°	658
65°	415
70°	513
75°	678
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 713 cd/sqm



TEST NUMBER: P1254162  
 CATALOG NUMBER: P3AS09R159035DE010 E3CD1MB

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	545.3	57.2
10°-20°	324.1	34.0
20°-30°	68.1	7.1
30°-40°	11.0	1.2
40°-50°	1.9	0.2
50°-60°	1.3	0.1
60°-70°	0.9	0.1
70°-80°	0.5	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	937.5	98.4
0°-40°	948.5	99.5
0°-60°	951.7	99.9
0°-90°	953.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	953.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8448	
5°	7053	545
15°	971	324
25°	131	68
35°	14	11
45°	2	2
55°	2	1
65°	1	1
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P1254162  
CATALOG NUMBER: P3AS09R159035DE010 E3CD1MB

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	8447.6
1°	8421.3
2°	8287.2
3°	8018.9
4°	7625.6
5°	7053.0
6°	6380.2
7°	5610.9
8°	4876.3
9°	4044.5
10°	3284.3
12.5°	1772.1
15°	971.2
17.5°	568.9
20°	349.6
22.5°	214.0
25°	131.1
27.5°	79.1
30°	46.7
32.5°	26.4
35°	13.6
37.5°	7.5
40°	4.5
42.5°	3.0
45°	2.3
47.5°	1.5
50°	1.5
52.5°	1.5
55°	1.5
57.5°	1.5
60°	1.5
62.5°	0.8
65°	0.8
67.5°	0.8
70°	0.8
72.5°	0.8
75°	0.8
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)