

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254200

Luminaire Tested: P3AS09R209035DE010 E3D1WH

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254200
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R209035DE010 E3D1WH
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 90CRI , E3D1WH TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 944.0 lumens
Efficiency: N/A
Efficacy: 85.0 lumens/watt
Spacing Criteria (0/90/45): 0.35 / 0.35 / 0.34
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254200
CATALOG NUMBER: P3AS09R209035DE010 E3D1WH

Luminous Intensity Polar Plot

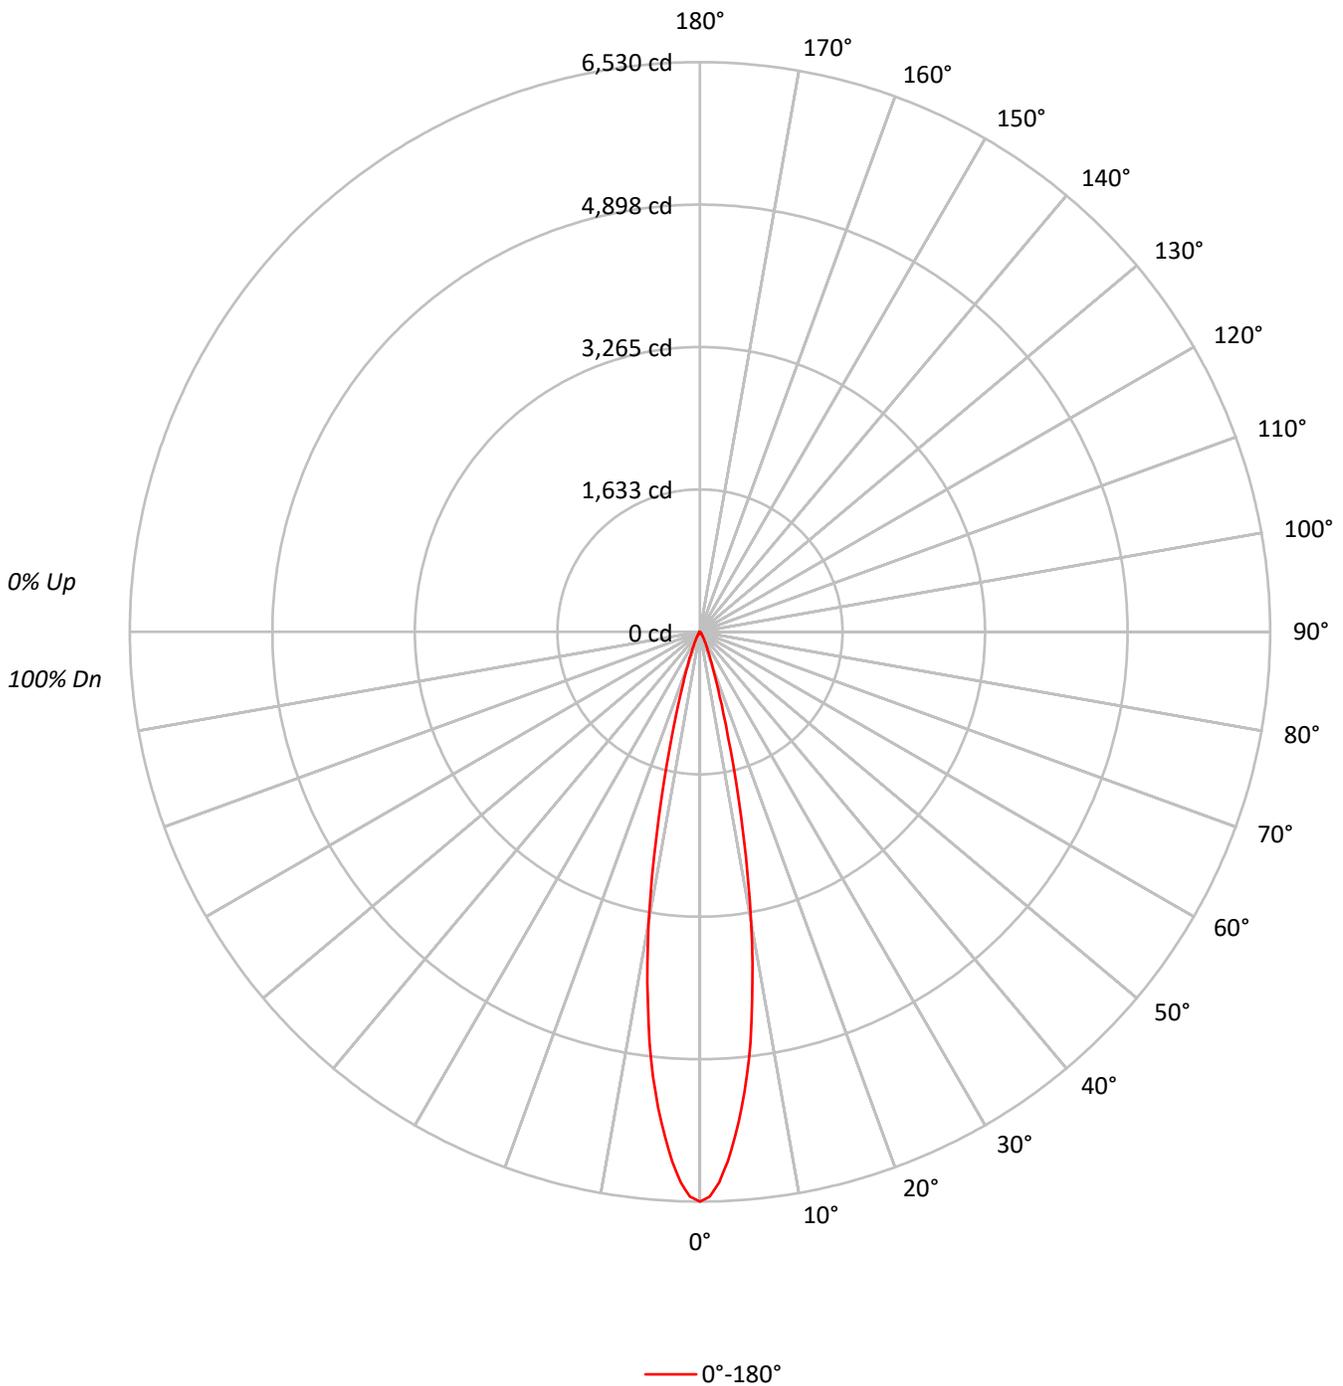



TEST NUMBER: P1254200
 CATALOG NUMBER: P3AS09R209035DE010 E3D1WH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	99	100
1	115	114	112	110	113	111	110	108	107	106	105	104	103	102	100	100	99	97	97	97	97
2	112	109	106	104	110	107	105	103	104	102	101	101	100	98	99	98	96	95	95	95	95
3	109	105	102	99	107	104	101	98	101	99	97	99	97	95	97	95	94	93	93	93	93
4	106	101	98	95	105	100	97	95	99	96	94	97	95	93	95	93	92	91	91	91	91
5	104	98	95	92	102	98	94	92	96	93	91	95	92	90	93	91	90	89	89	89	89
6	101	96	92	89	100	95	92	89	94	91	89	93	90	88	92	89	88	87	87	87	87
7	99	93	90	87	98	93	89	87	92	89	86	91	88	86	90	87	86	85	85	85	85
8	97	91	87	85	96	91	87	85	90	87	85	89	86	84	88	86	84	83	83	83	83
9	95	89	85	83	94	89	85	83	88	85	83	87	84	83	87	84	82	81	81	81	81
10	93	87	84	81	92	87	83	81	86	83	81	86	83	81	85	83	81	80	80	80	80

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1431969
5°	1205654
10°	753048
15°	281523
20°	96632
25°	40285
30°	18965
35°	8486
40°	4008
45°	2047
50°	751
55°	153
60°	175
65°	208
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2047 cd/sqm



TEST NUMBER: P1254200
 CATALOG NUMBER: P3AS09R209035DE010 E3D1WH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	455.5	48.3
10°-20°	375.2	39.7
20°-30°	85.3	9.0
30°-40°	21.7	2.3
40°-50°	5.4	0.6
50°-60°	0.7	0.1
60°-70°	0.2	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	915.9	97.0
0°-40°	937.6	99.3
0°-60°	943.8	100.0
0°-90°	944.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	944.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6530	
5°	5477	455
15°	1240	375
25°	166	85
35°	32	22
45°	7	5
55°	0	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1254200
CATALOG NUMBER: P3AS09R209035DE010 E3D1WH

CANDELA DISTRIBUTION (FULL):

0°	
0°	6530.3
1°	6475.0
2°	6311.8
3°	6077.8
4°	5790.7
5°	5477.3
6°	5128.1
7°	4742.8
8°	4293.3
9°	3847.8
10°	3382.0
11°	2886.3
12°	2391.3
13°	1972.0
14°	1571.2
15°	1240.1
16°	978.8
17°	772.1
18°	620.4
19°	504.5
20°	414.1
21°	346.2
22°	289.0
23°	240.3
24°	200.4
25°	166.5
27.5°	108.9
30°	74.9
32.5°	46.1
35°	31.7
37.5°	20.3
40°	14.0
42.5°	9.6
45°	6.6
47.5°	4.4
50°	2.2
52.5°	1.1
55°	0.4
57.5°	0.4
60°	0.4
62.5°	0.4
65°	0.4
67.5°	0.0
70°	0.0
72.5°	0.0



TEST NUMBER: P1254200
CATALOG NUMBER: P3AS09R209035DE010 E3D1WH

CANDELA DISTRIBUTION (continued):

	0°
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)