

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254212

Luminaire Tested: P3AS09R209035DE010 E3DLD1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254212
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-6)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R209035DE010 E3DLD1WMH
Description: 3in Adjustable LED luminaire with, R20 optic, 3500K CCT AND, 90CRI , E3DLD1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 593.1 lumens
Efficiency: N/A
Efficacy: 53.4 lumens/watt
Spacing Criteria (0/90/45): 0.76 / 0.76 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254212

CATALOG NUMBER: P3AS09R209035DE010 E3DLD1WMH

Luminous Intensity Polar Plot

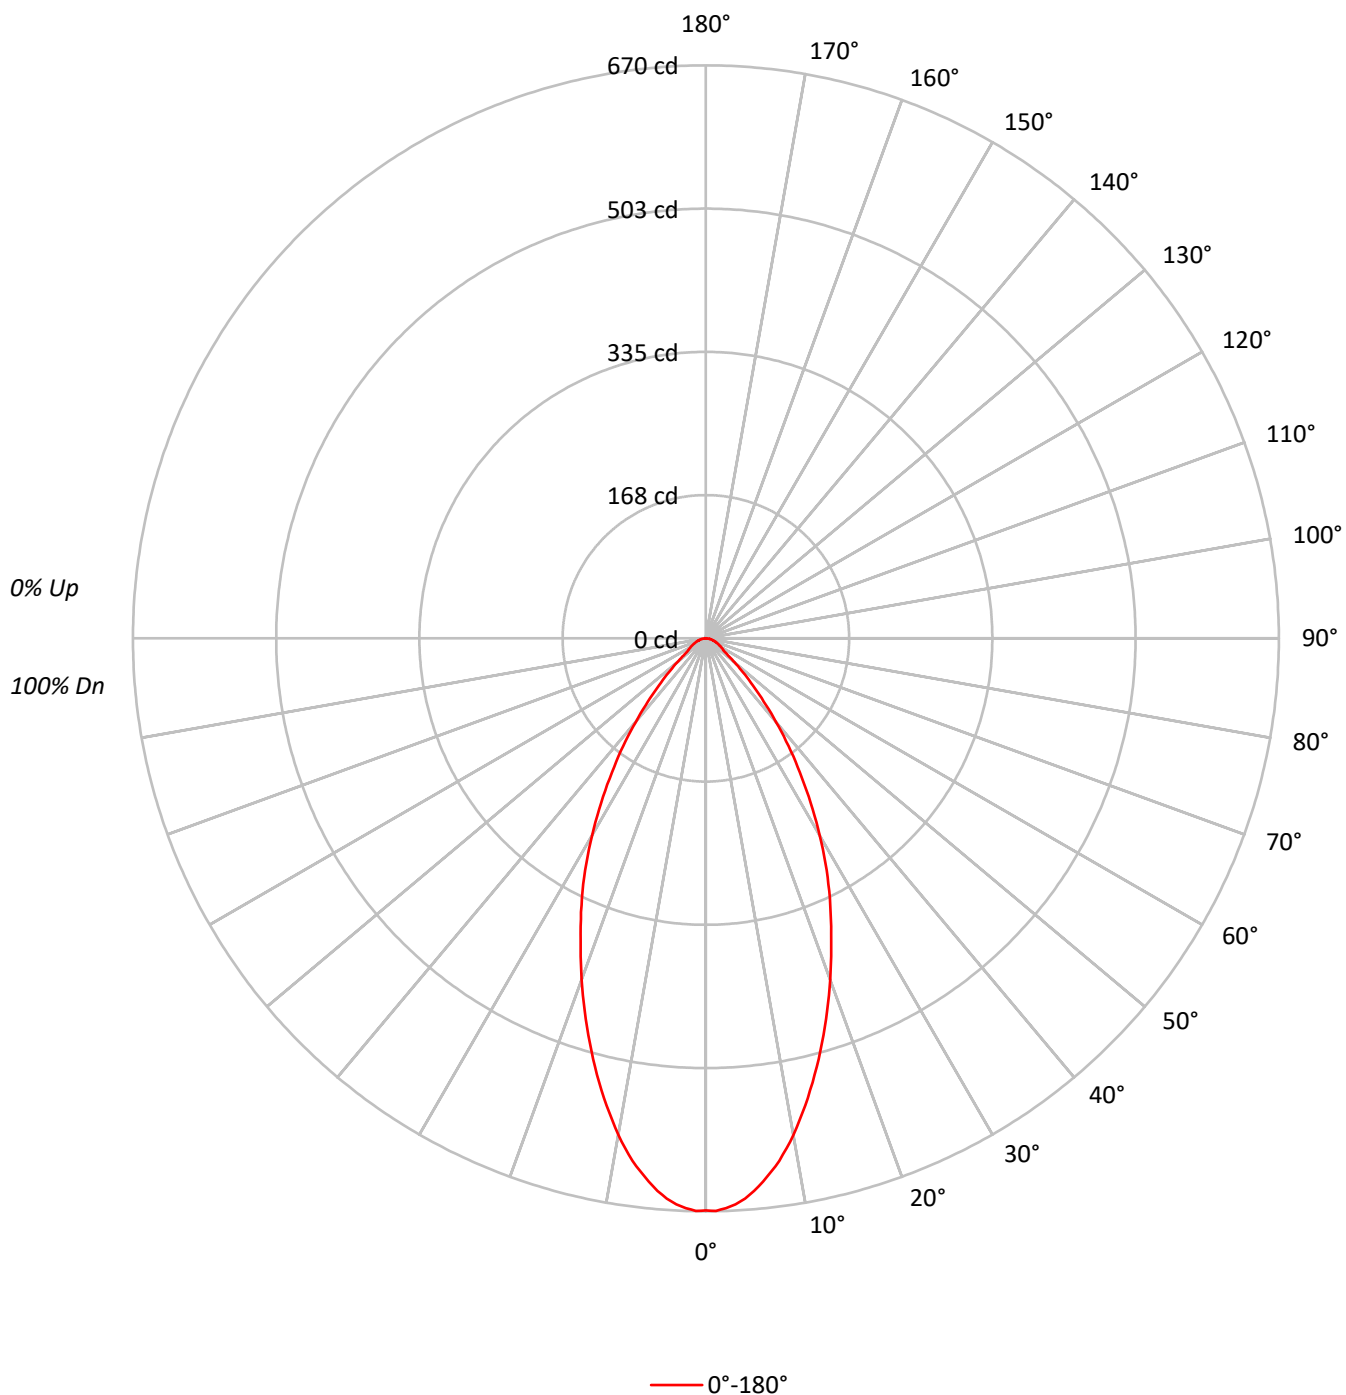

TEST NUMBER: P1254212

CATALOG NUMBER: P3AS09R209035DE010 E3DLD1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	109	106	104	110	107	105	102	103	101	99		99	98	96		96
2	106	100	96	92	104	99	94	91	95	92	89		92	89	87		90
3	100	93	87	82	98	91	86	82	88	84	80		86	82	79		84
4	94	86	79	75	92	84	79	74	82	77	73		80	76	72		78
5	89	80	73	68	87	79	73	68	77	71	67		75	70	67		73
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	80	69	63	58	78	69	62	58	67	62	58		66	61	57		65
8	75	65	59	54	74	64	58	54	63	58	54		62	57	53		61
9	72	61	55	50	70	61	55	50	60	54	50		59	54	50		58
10	68	58	51	47	67	57	51	47	56	51	47		56	50	47		55

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	146677
5°	142769
10°	131327
15°	115597
20°	99129
25°	83279
30°	67327
35°	51210
40°	36440
45°	24065
50°	14908
55°	9787
60°	8903
65°	8198
70°	7758
75°	7032
80°	6693
85°	5787

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24065 cd/sqm

TEST NUMBER: P1254212

CATALOG NUMBER: P3AS09R209035DE010 E3DLD1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.0	10.1
10°-20°	141.8	23.9
20°-30°	157.3	26.5
30°-40°	120.0	20.2
40°-50°	61.5	10.4
50°-60°	25.3	4.3
60°-70°	15.8	2.7
70°-80°	8.9	1.5
80°-90°	2.6	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	359.1	60.5
0°-40°	479.1	80.8
0°-60°	565.8	95.4
0°-90°	593.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	593.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	669	
5°	649	60
15°	509	142
25°	344	157
35°	191	120
45°	78	61
55°	26	25
65°	16	16
75°	8	9
85°	2	3
90°	0	

TEST NUMBER: P1254212

CATALOG NUMBER: P3AS09R209035DE010 E3DLD1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	668.9
1°	669.7
2°	666.6
3°	662.9
4°	656.9
5°	648.6
6°	638.8
7°	628.2
8°	616.9
9°	603.4
10°	589.8
12.5°	550.6
15°	509.2
17.5°	467.0
20°	424.8
22.5°	382.7
25°	344.2
27.5°	305.8
30°	265.9
32.5°	228.2
35°	191.3
37.5°	158.9
40°	127.3
42.5°	100.2
45°	77.6
47.5°	58.8
50°	43.7
52.5°	32.4
55°	25.6
57.5°	23.4
60°	20.3
62.5°	18.1
65°	15.8
67.5°	13.6
70°	12.1
72.5°	9.8
75°	8.3
77.5°	6.8
80°	5.3
82.5°	3.8
85°	2.3
87.5°	0.8
90°	0.0

(END OF REPORT)