

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254280

Luminaire Tested: P3AS09R309035DE010 E3PHLP1MW

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254280
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2509-551-8)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS09R309035DE010 E3PHLP1MW
Description: 3in Adjustable LED luminaire with, R30 optic, 3500K CCT AND, 90CRI , E3PHLP1MW TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 423.0 lumens
Efficiency: N/A
Efficacy: 38.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.67
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 11.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254280
CATALOG NUMBER: P3AS09R309035DE010 E3PHLP1MW

Luminous Intensity Polar Plot

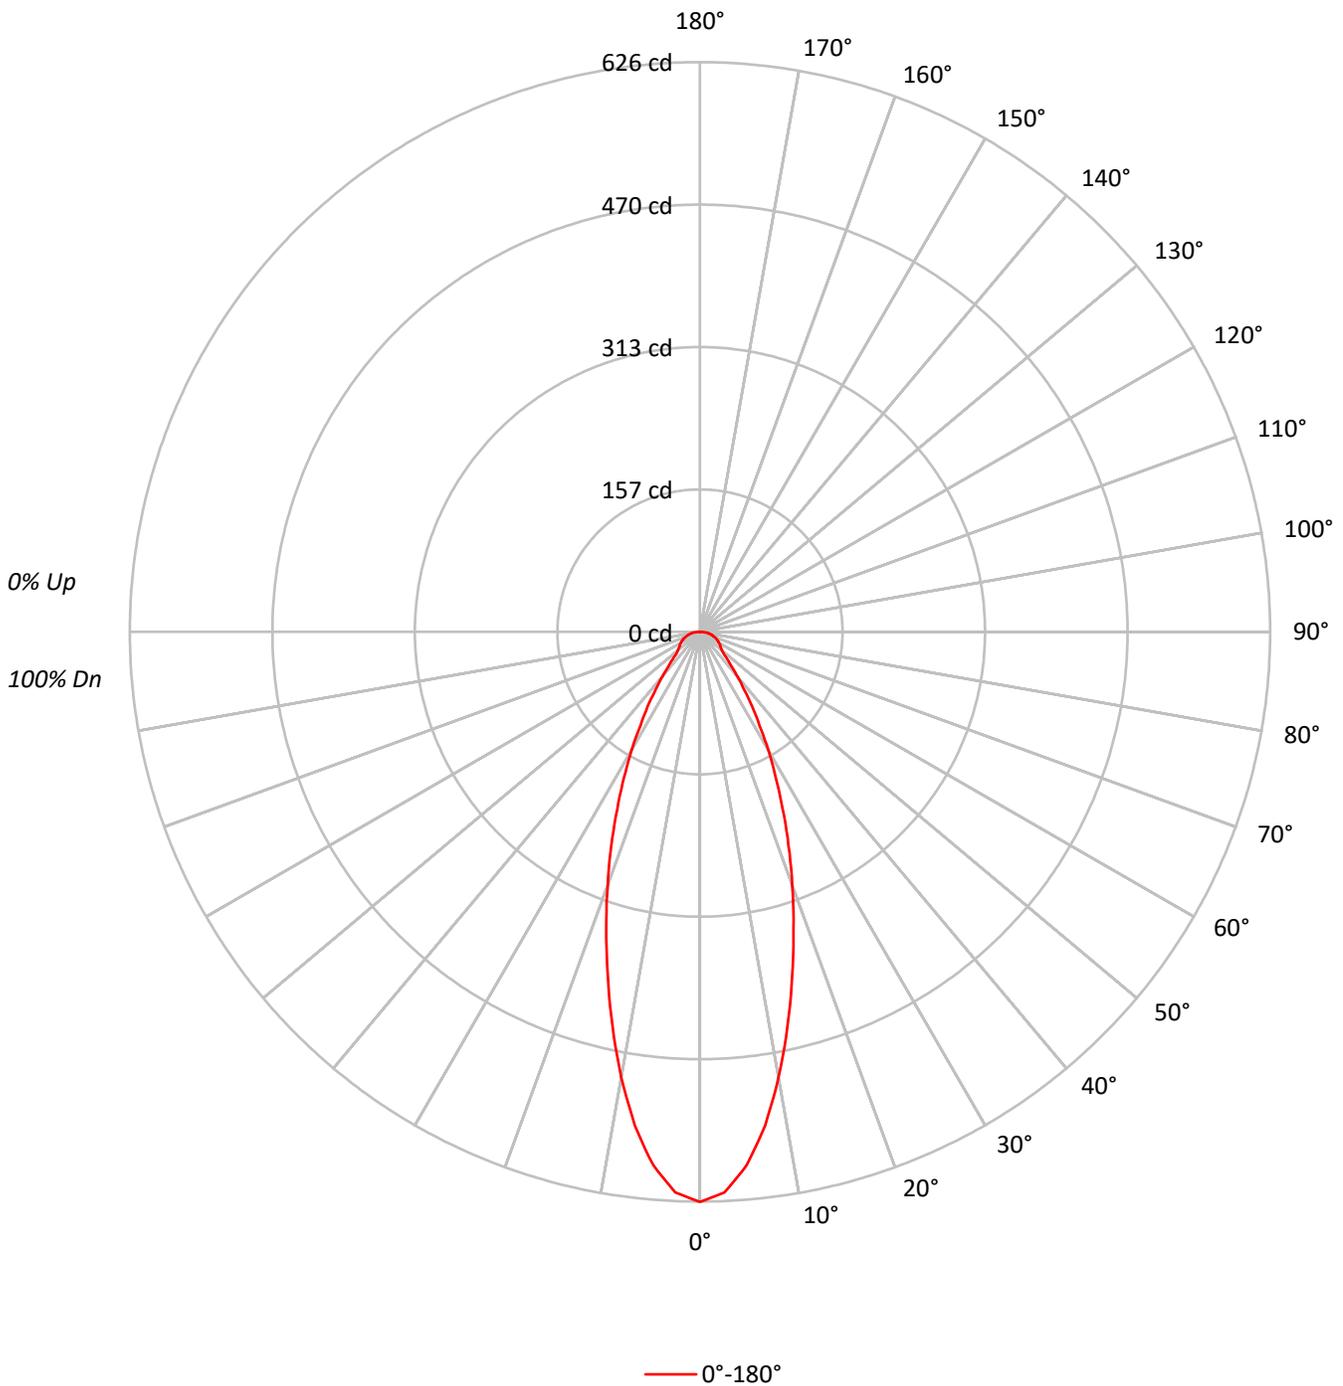



TEST NUMBER: P1254280
 CATALOG NUMBER: P3AS09R309035DE010 E3PHLP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	108	105	102	109	106	103	101	102	100	97	98	96	94	95	93	92	90				90
2	105	99	94	90	103	97	93	89	94	90	87	91	88	85	88	85	83	81				81
3	99	91	85	80	96	89	84	80	87	82	78	84	80	77	82	79	76	74				74
4	93	84	78	73	91	83	77	72	81	76	71	79	74	71	77	73	70	68				68
5	88	78	72	67	86	77	71	66	75	70	66	74	69	65	72	68	65	63				63
6	83	73	67	62	82	72	66	62	71	65	61	69	64	61	68	64	60	59				59
7	79	69	62	57	78	68	62	57	67	61	57	66	60	57	64	60	56	55				55
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51				51
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	58	53	50	49				49
10	68	58	52	48	67	58	52	48	57	51	48	56	51	47	55	51	47	46				46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	137335
5°	129496
10°	110686
15°	88718
20°	69143
25°	51995
30°	37930
35°	26742
40°	18320
45°	13118
50°	10746
55°	10360
60°	10482
65°	10689
70°	11156
75°	11946
80°	12375
85°	13586

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 82.5°
 Luminance: 14616 cd/sqm



TEST NUMBER: P1254280
 CATALOG NUMBER: P3AS09R309035DE010 E3PHLP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	53.2	12.6
10°-20°	108.6	25.7
20°-30°	98.9	23.4
30°-40°	63.0	14.9
40°-50°	33.7	8.0
50°-60°	24.7	5.8
60°-70°	20.7	4.9
70°-80°	14.5	3.4
80°-90°	5.8	1.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	260.7	61.6
0°-40°	323.7	76.5
0°-60°	382.1	90.3
0°-90°	423.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	423.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	626	
5°	588	53
15°	391	109
25°	215	99
35°	100	63
45°	42	34
55°	27	25
65°	21	21
75°	14	14
85°	5	6
90°	0	



TEST NUMBER: P1254280
CATALOG NUMBER: P3AS09R309035DE010 E3PHLP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	626.3
2.5°	616.6
5°	588.3
7.5°	547.1
10°	497.1
12.5°	444.0
15°	390.8
17.5°	341.9
20°	296.3
22.5°	254.0
25°	214.9
27.5°	180.2
30°	149.8
32.5°	121.6
35°	99.9
37.5°	79.2
40°	64.0
42.5°	51.0
45°	42.3
47.5°	34.7
50°	31.5
52.5°	29.3
55°	27.1
57.5°	26.1
60°	23.9
62.5°	22.8
65°	20.6
67.5°	19.5
70°	17.4
72.5°	15.2
75°	14.1
77.5°	11.9
80°	9.8
82.5°	8.7
85°	5.4
87.5°	2.2
90°	0.0

(END OF REPORT)