

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254351

Luminaire Tested: P3AS09R459035DE010 E3DLD1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1254351  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-26)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS09R459035DE010 E3DLD1GPH  
Description: 3in Adjustable LED luminaire with, R45 optic, 3500K CCT AND, 90CRI , E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 320.0 lumens  
Efficiency: N/A  
Efficacy: 28.8 lumens/watt  
Spacing Criteria (0/90/45): 0.84 / 0.84 / 0.92  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 11.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1254351  
CATALOG NUMBER: P3AS09R459035DE010 E3DLD1GPH

### Luminous Intensity Polar Plot

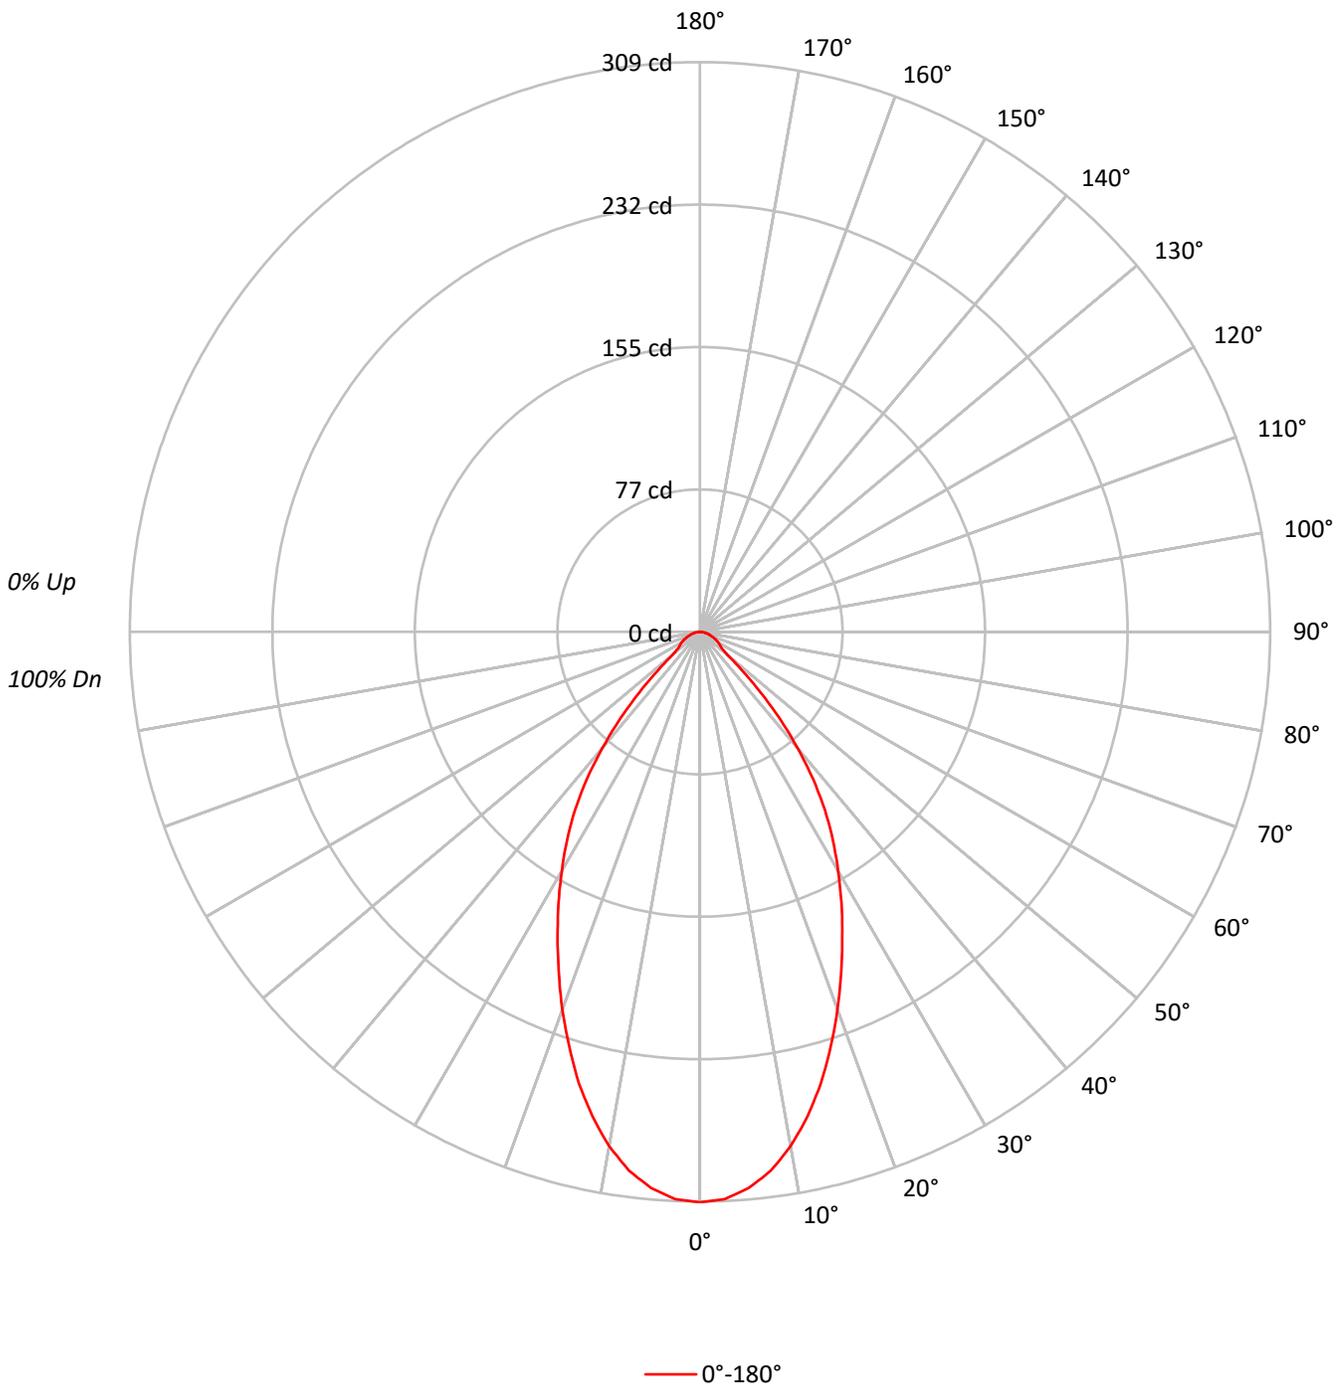



TEST NUMBER: P1254351  
 CATALOG NUMBER: P3AS09R459035DE010 E3DLD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91				91
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83				83
3	99	92	86	82	97	91	85	81	88	83	80	85	81	78	83	80	77	75				75
4	94	85	78	74	92	84	78	73	81	76	72	79	75	71	77	74	71	69				69
5	88	79	72	67	86	78	71	67	76	70	66	74	69	65	72	68	65	63				63
6	83	73	66	61	81	72	66	61	71	65	61	69	64	60	68	63	60	58				58
7	78	68	61	57	77	67	61	56	66	60	56	65	60	56	64	59	55	54				54
8	74	64	57	52	73	63	57	52	62	56	52	61	56	52	60	55	52	50				50
9	70	60	53	49	69	59	53	49	58	52	48	57	52	48	56	52	48	47				47
10	67	56	50	45	66	56	49	45	55	49	45	54	49	45	53	48	45	44				44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	67845
5°	66652
10°	63058
15°	57526
20°	50871
25°	44156
30°	37905
35°	31588
40°	23530
45°	14420
50°	6652
55°	5199
60°	5000
65°	4618
70°	4231
75°	4067
80°	3788
85°	2768

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 14420 cd/sqm



TEST NUMBER: P1254351  
 CATALOG NUMBER: P3AS09R459035DE010 E3DLD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	28.3	8.8
10°-20°	70.5	22.0
20°-30°	83.8	26.2
30°-40°	72.8	22.8
40°-50°	36.5	11.4
50°-60°	12.6	4.0
60°-70°	8.9	2.8
70°-80°	5.0	1.5
80°-90°	1.5	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	182.6	57.1
0°-40°	255.5	79.8
0°-60°	304.6	95.2
0°-90°	320.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	320.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	309	
5°	303	28
15°	253	71
25°	182	84
35°	118	73
45°	46	37
55°	14	13
65°	9	9
75°	5	5
85°	1	1
90°	0	



TEST NUMBER: P1254351  
CATALOG NUMBER: P3AS09R459035DE010 E3DLD1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	309.4
2.5°	307.9
5°	302.8
7.5°	294.7
10°	283.2
12.5°	269.2
15°	253.4
17.5°	235.7
20°	218.0
22.5°	199.9
25°	182.5
27.5°	166.0
30°	149.7
32.5°	134.2
35°	118.0
37.5°	100.7
40°	82.2
42.5°	64.2
45°	46.5
47.5°	30.6
50°	19.5
52.5°	15.1
55°	13.6
57.5°	12.5
60°	11.4
62.5°	10.3
65°	8.9
67.5°	7.7
70°	6.6
72.5°	5.5
75°	4.8
77.5°	3.7
80°	3.0
82.5°	2.2
85°	1.1
87.5°	0.7
90°	0.0

(END OF REPORT)