

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254727

Luminaire Tested: P3AS13R409035DE010 E3DL1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254727
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-23)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R409035DE010 E3DL1GPH
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 90CRI , E3DL1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 571.1 lumens
Efficiency: N/A
Efficacy: 39.1 lumens/watt
Spacing Criteria (0/90/45): 0.65 / 0.65 / 0.63
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254727

CATALOG NUMBER: P3AS13R409035DE010 E3DL1GPH

Luminous Intensity Polar Plot

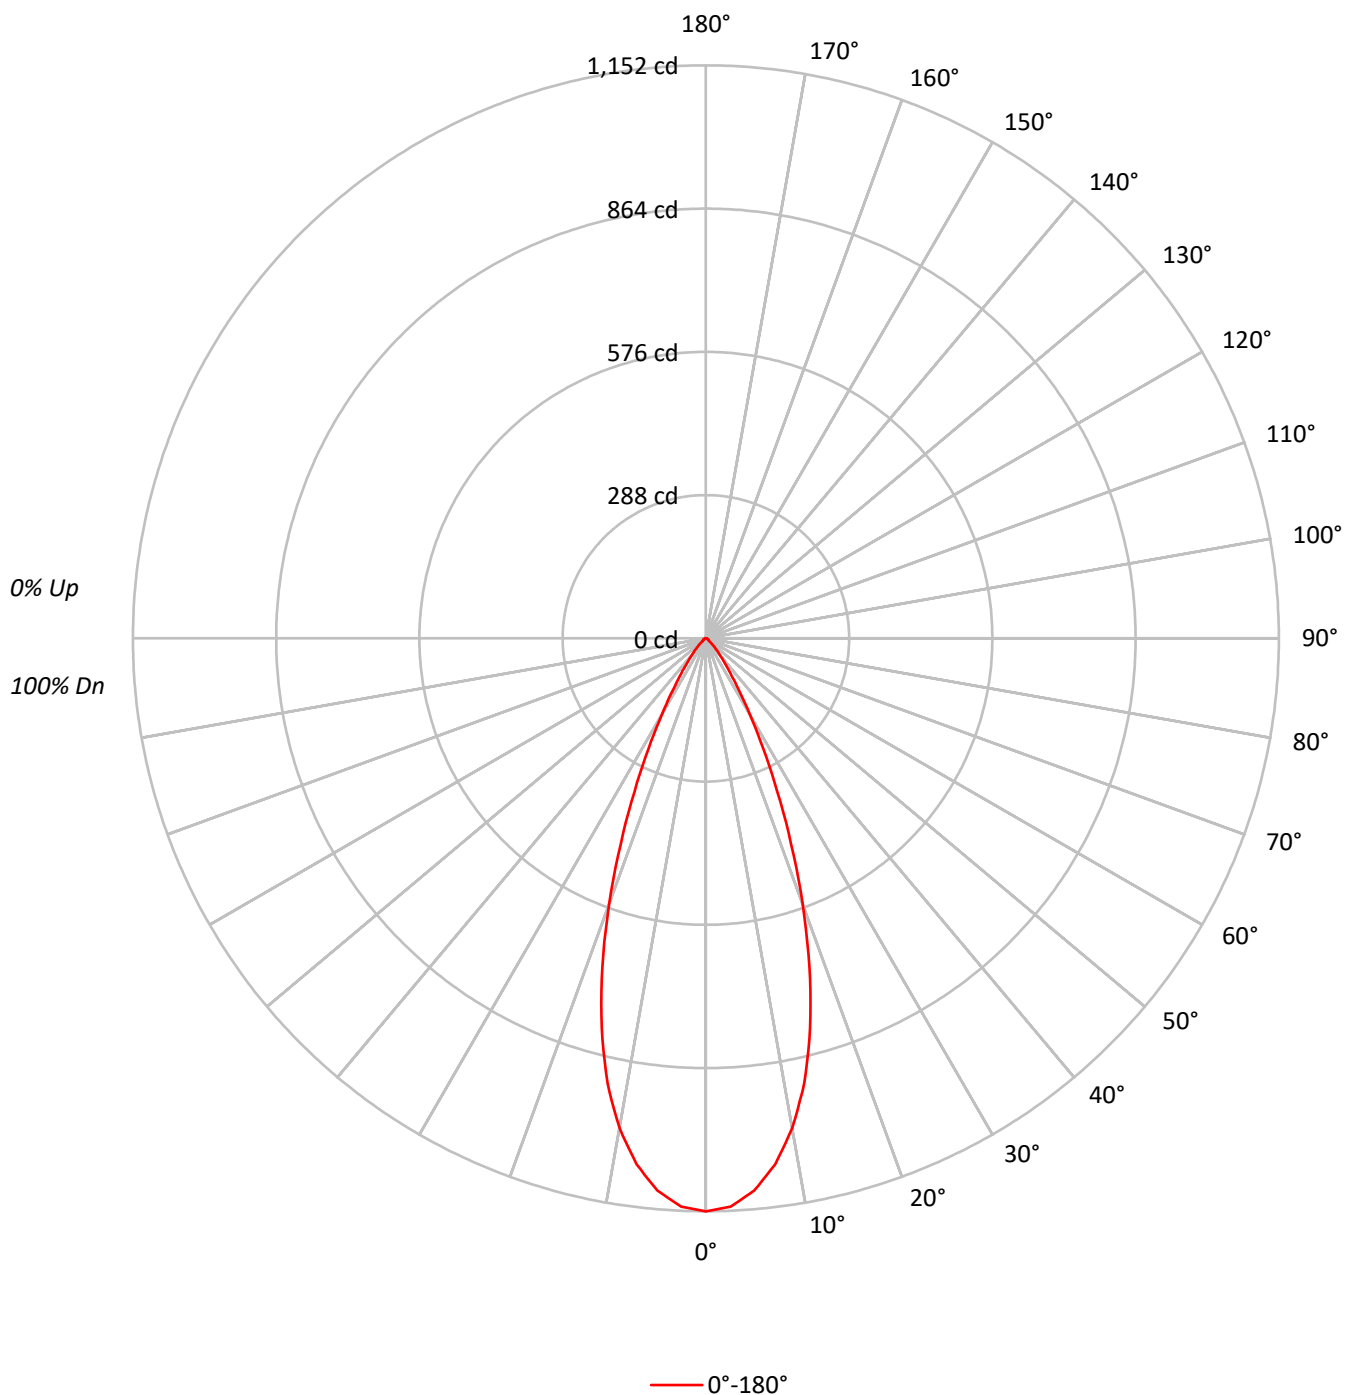

TEST NUMBER: P1254727

CATALOG NUMBER: P3AS13R409035DE010 E3DL1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	114	111	109	107	112	109	107	105	105	104	102		102	100	99		98
2	109	105	101	98	107	103	100	97	100	97	95		97	95	93		94
3	104	99	94	91	102	97	93	90	95	91	88		92	89	87		90
4	100	93	88	85	98	92	88	84	90	86	83		88	85	82		86
5	96	88	83	79	94	88	83	79	86	82	78		84	81	78		83
6	92	84	79	75	91	83	78	75	82	78	74		81	77	74		79
7	88	80	75	71	87	79	74	71	78	74	71		77	73	70		76
8	85	76	71	68	84	76	71	67	75	70	67		74	70	67		73
9	82	73	68	64	81	73	68	64	72	67	64		71	67	64		70
10	78	70	65	62	78	70	65	61	69	64	61		68	64	61		67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	252655
5°	245322
10°	222619
15°	183906
20°	132662
25°	82069
30°	44437
35°	22968
40°	12481
45°	6977
50°	3514
55°	2638
60°	2368
65°	2283
70°	2180
75°	2118
80°	1894
85°	1258

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 6977 cd/sqm

TEST NUMBER: P1254727

CATALOG NUMBER: P3AS13R409035DE010 E3DL1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.7	18.0
10°-20°	220.6	38.6
20°-30°	157.4	27.6
30°-40°	58.0	10.2
40°-50°	18.2	3.2
50°-60°	6.4	1.1
60°-70°	4.4	0.8
70°-80°	2.6	0.5
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	480.8	84.2
0°-40°	538.7	94.3
0°-60°	563.4	98.7
0°-90°	571.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	571.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1152	
5°	1114	103
15°	810	221
25°	339	157
35°	86	58
45°	22	18
55°	7	6
65°	4	4
75°	2	3
85°	0	1
90°	0	

TEST NUMBER: P1254727

CATALOG NUMBER: P3AS13R409035DE010 E3DL1GPH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1152.2
2.5°	1143.4
5°	1114.5
7.5°	1066.5
10°	999.8
12.5°	915.0
15°	810.1
17.5°	692.5
20°	568.5
22.5°	446.5
25°	339.2
27.5°	249.0
30°	175.5
32.5°	123.0
35°	85.8
37.5°	60.8
40°	43.6
42.5°	31.4
45°	22.5
47.5°	15.2
50°	10.3
52.5°	7.4
55°	6.9
57.5°	6.4
60°	5.4
62.5°	4.9
65°	4.4
67.5°	3.9
70°	3.4
72.5°	2.9
75°	2.5
77.5°	2.0
80°	1.5
82.5°	1.0
85°	0.5
87.5°	0.5
90°	0.0

(END OF REPORT)