

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254816

Luminaire Tested: P3AS13R559035DE010 E3DLD1GPH

Issue Date: 1/30/2026

**Test Information**


Test Method: LM-79-2019  
Report Number: P1254816  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-34)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS13R559035DE010 E3DLD1GPH  
Description: 3in Adjustable LED luminaire with, R55 optic, 3500K CCT AND, 90CRI , E3DLD1GPH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 415.0 lumens  
Efficiency: N/A  
Efficacy: 28.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.97  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 14.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1254816  
CATALOG NUMBER: P3AS13R559035DE010 E3DLD1GPH

### Luminous Intensity Polar Plot

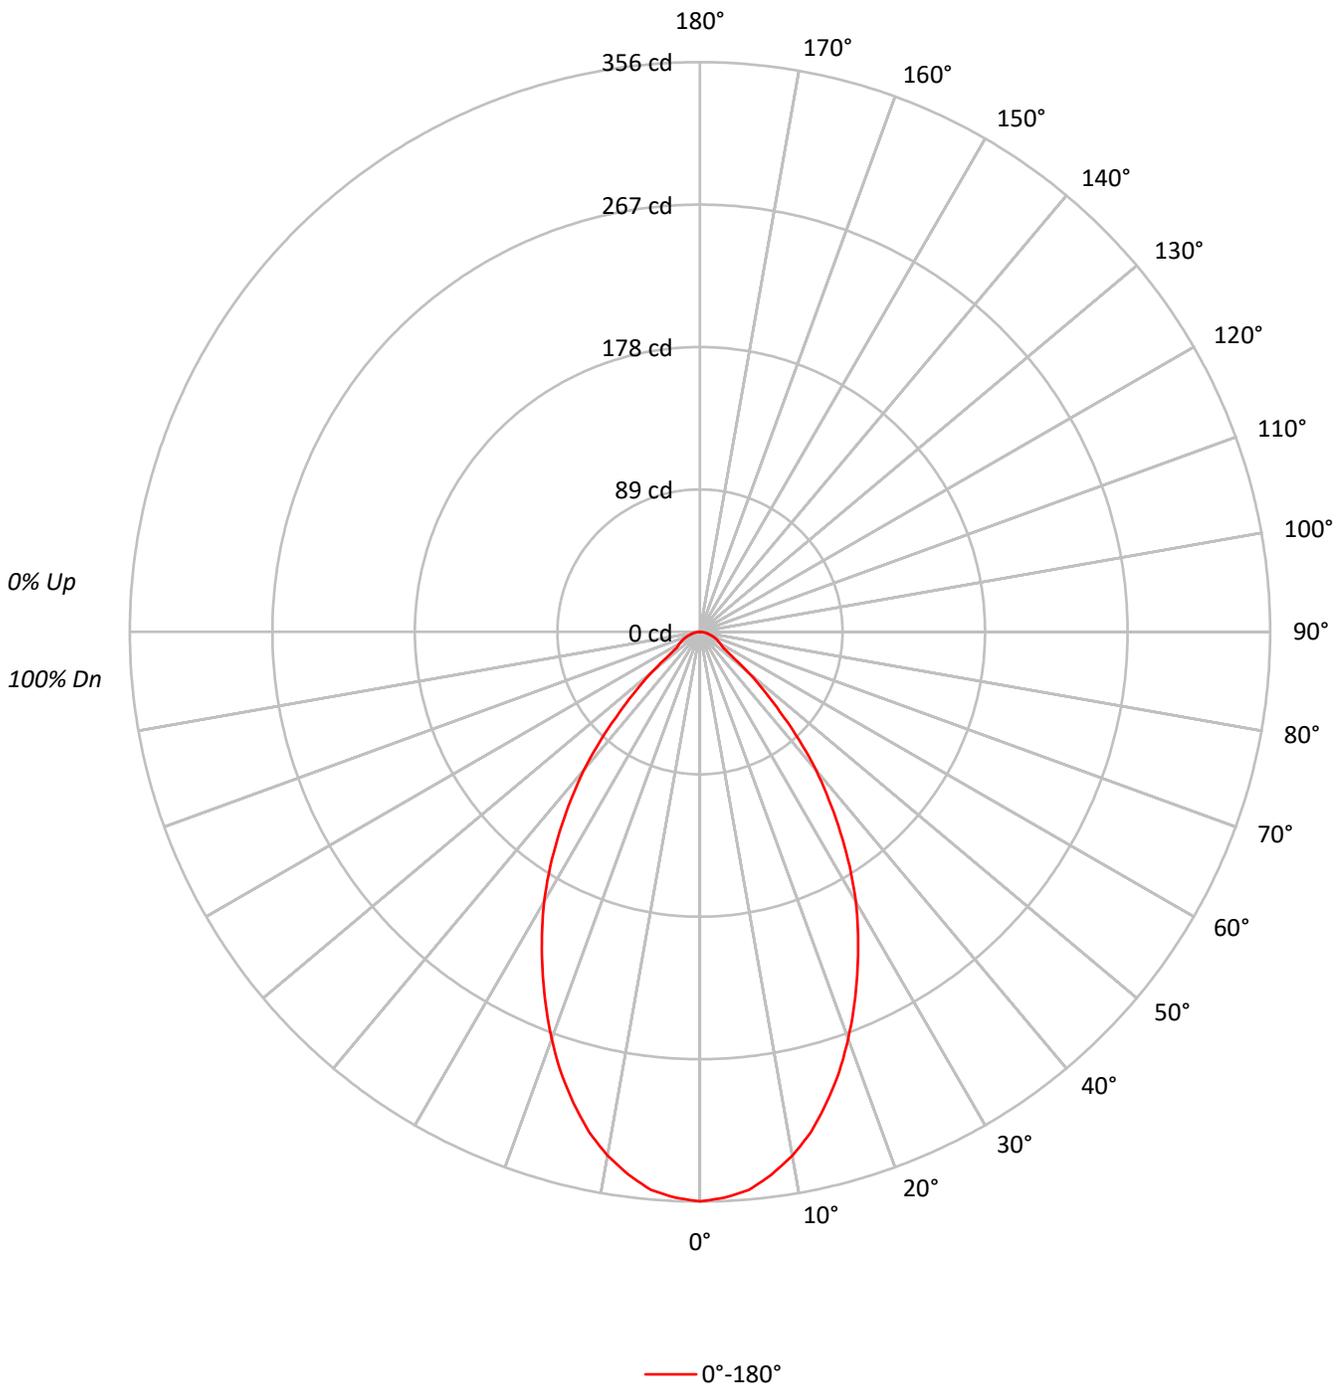



TEST NUMBER: P1254816  
 CATALOG NUMBER: P3AS13R559035DE010 E3DLD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	103	110	107	104	102	103	100	98	99	97	95	95	94	93	91			91
2	105	100	95	91	103	98	93	90	94	91	88	91	88	86	89	86	84	82			82
3	99	91	85	81	97	90	84	80	87	82	79	85	81	77	82	79	76	74			74
4	93	84	77	72	91	83	77	72	80	75	71	78	74	70	76	73	69	68			68
5	87	77	71	66	85	76	70	65	75	69	65	73	68	64	71	67	64	62			62
6	82	72	65	60	80	71	64	60	69	64	59	68	63	59	66	62	58	57			57
7	77	67	60	55	76	66	59	55	65	59	54	63	58	54	62	57	54	52			52
8	73	62	55	51	72	62	55	51	60	54	50	59	54	50	58	53	50	48			48
9	69	58	51	47	68	58	51	47	57	51	47	56	50	46	55	50	46	45			45
10	65	55	48	44	64	54	48	44	53	47	43	52	47	43	52	47	43	42			42

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	78020
5°	77041
10°	73991
15°	69217
20°	63145
25°	56326
30°	49273
35°	40930
40°	32260
45°	21894
50°	13373
55°	6920
60°	6447
65°	6123
70°	5642
75°	4999
80°	4925
85°	3774

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21894 cd/sqm



TEST NUMBER: P1254816  
 CATALOG NUMBER: P3AS13R559035DE010 E3DLD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	32.8	7.9
10°-20°	85.2	20.5
20°-30°	106.7	25.7
30°-40°	95.2	22.9
40°-50°	55.8	13.4
50°-60°	19.3	4.6
60°-70°	11.6	2.8
70°-80°	6.5	1.6
80°-90°	1.9	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	224.7	54.2
0°-40°	320.0	77.1
0°-60°	395.0	95.2
0°-90°	415.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	415.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	356	
5°	350	33
15°	305	85
25°	233	107
35°	153	95
45°	71	56
55°	18	19
65°	12	12
75°	6	6
85°	2	2
90°	0	



TEST NUMBER: P1254816  
CATALOG NUMBER: P3AS13R559035DE010 E3DLD1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	355.8
2.5°	353.9
5°	350.0
7.5°	342.1
10°	332.3
12.5°	320.1
15°	304.9
17.5°	288.7
20°	270.6
22.5°	251.9
25°	232.8
27.5°	213.7
30°	194.6
32.5°	174.0
35°	152.9
37.5°	132.3
40°	112.7
42.5°	91.7
45°	70.6
47.5°	53.9
50°	39.2
52.5°	25.5
55°	18.1
57.5°	16.2
60°	14.7
62.5°	13.2
65°	11.8
67.5°	10.3
70°	8.8
72.5°	7.4
75°	5.9
77.5°	4.9
80°	3.9
82.5°	2.5
85°	1.5
87.5°	1.0
90°	0.0

(END OF REPORT)