

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1254834

Luminaire Tested: P3AS13R609035DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1254834
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-15)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS13R609035DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 90CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1198.0 lumens
Efficiency: N/A
Efficacy: 82.1 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 0.88
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 14.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1254834
CATALOG NUMBER: P3AS13R609035DE010 E3D1H

Luminous Intensity Polar Plot

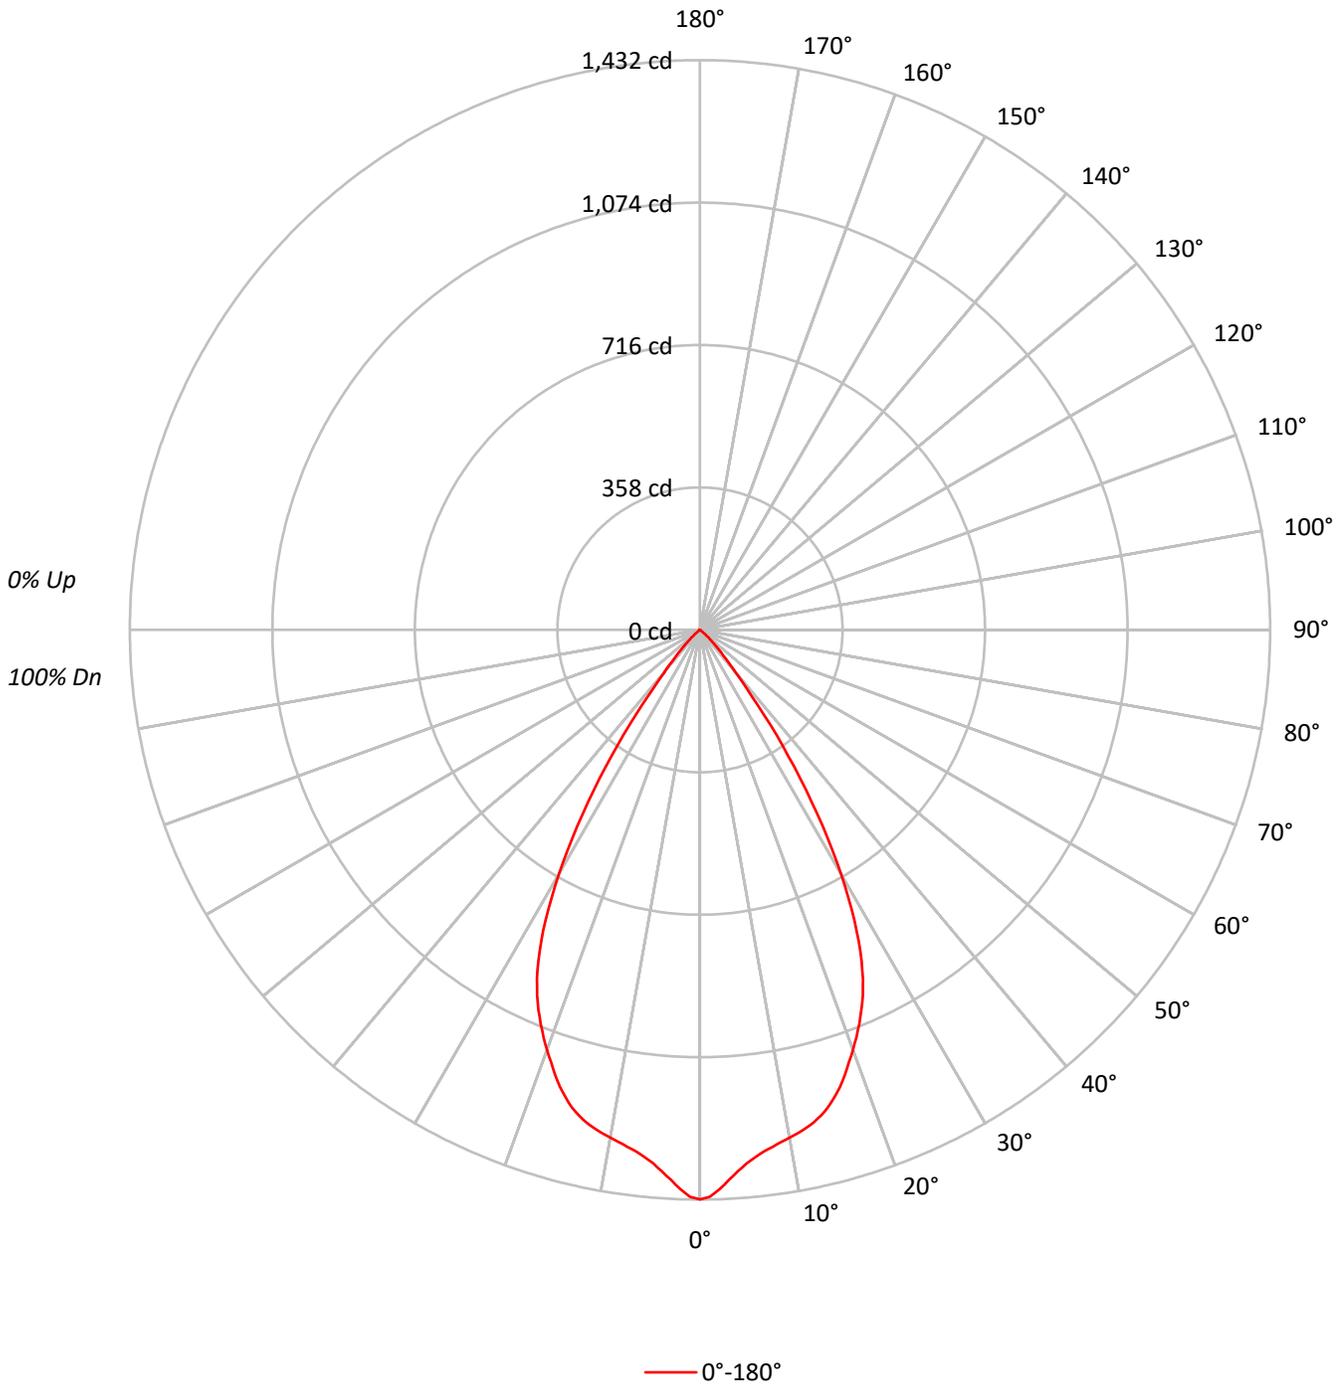



TEST NUMBER: P1254834

CATALOG NUMBER: P3AS13R609035DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	111	109	106	111	109	107	105	105	103	102	101	100	99	98	97	96	94	94	94	94
2	108	104	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88	88	88	88
3	103	97	92	88	101	96	91	88	93	89	86	91	87	85	88	86	84	82	82	82	82
4	98	91	85	81	96	90	85	81	88	83	80	86	82	79	84	81	78	77	77	77	77
5	93	85	80	75	92	84	79	75	83	78	74	81	77	74	79	76	73	72	72	72	72
6	89	80	74	70	87	79	74	70	78	73	70	77	72	69	75	71	69	67	67	67	67
7	85	76	70	66	83	75	69	65	74	69	65	72	68	65	71	67	64	63	63	63	63
8	81	71	65	61	79	71	65	61	70	65	61	69	64	61	68	64	61	59	59	59	59
9	77	67	62	58	76	67	61	58	66	61	57	65	61	57	64	60	57	56	56	56	56
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53	53	53	53

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	313900
5°	296323
10°	288616
15°	282022
20°	262219
25°	234401
30°	179066
35°	103383
40°	40132
45°	16715
50°	3684
55°	573
60°	439
65°	259
70°	321
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 16715 cd/sqm



TEST NUMBER: P1254834
 CATALOG NUMBER: P3AS13R609035DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	127.1	10.6
10°-20°	346.1	28.9
20°-30°	433.4	36.2
30°-40°	242.3	20.2
40°-50°	46.1	3.8
50°-60°	2.4	0.2
60°-70°	0.6	0.0
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	906.6	75.7
0°-40°	1148.8	95.9
0°-60°	1197.3	99.9
0°-90°	1198.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1198.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1432	
5°	1346	127
15°	1242	346
25°	969	433
35°	386	242
45°	54	46
55°	2	2
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P1254834

CATALOG NUMBER: P3AS13R609035DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1431.5
1°	1425.6
2°	1407.0
3°	1384.9
4°	1364.3
5°	1346.2
6°	1332.5
7°	1320.7
8°	1311.9
9°	1303.6
10°	1296.2
11°	1288.9
12°	1280.5
13°	1270.2
14°	1258.0
15°	1242.3
16°	1223.2
17°	1201.6
18°	1177.1
19°	1149.2
20°	1123.7
21°	1096.3
22°	1067.8
23°	1037.9
24°	1005.1
25°	968.8
26°	926.2
27°	878.7
28°	825.3
29°	768.4
30°	707.2
31°	645.4
32°	581.7
32.5°	546.9
33°	515.5
34°	450.4
35°	386.2
36°	328.3
37°	267.1
37.5°	239.1
38°	211.7
39°	170.5
40°	140.2
42.5°	85.3
45°	53.9



TEST NUMBER: P1254834
CATALOG NUMBER: P3AS13R609035DE010 E3D1H

CANDELA DISTRIBUTION (continued):

	0°
47.5°	29.9
50°	10.8
52.5°	2.5
55°	1.5
57.5°	1.0
60°	1.0
62.5°	0.5
65°	0.5
67.5°	0.5
70°	0.5
72.5°	0.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)