

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1255001

Luminaire Tested: P3AS17R259035DE010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1255001
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R259035DE010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 3500K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1687.1 lumens
Efficiency: N/A
Efficacy: 79.6 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1255001

CATALOG NUMBER: P3AS17R259035DE010 E3CB1MMS

Luminous Intensity Polar Plot

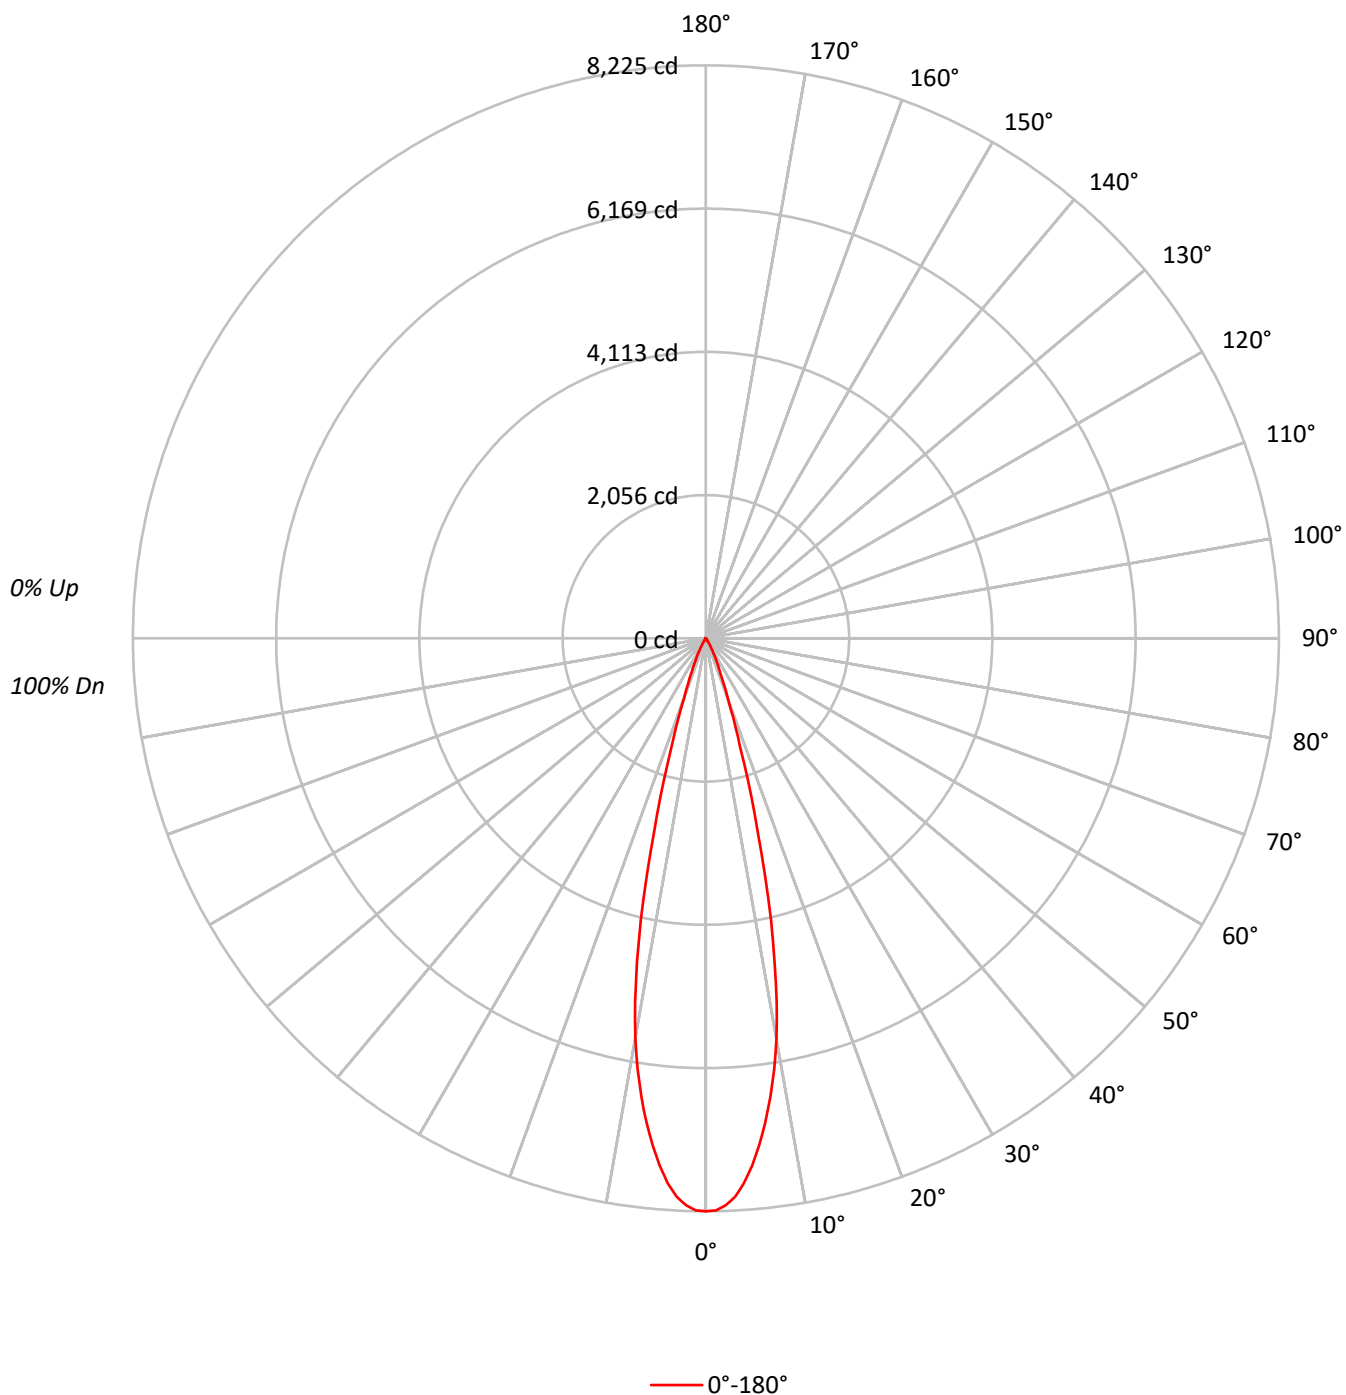

TEST NUMBER: P1255001

CATALOG NUMBER: P3AS17R259035DE010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20					20					20					20
RC	80				70					50					30					10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	99	99
1	115	113	111	110	113	111	109	108	107	106	105	103	103	102	100	99	99	97	96	96
2	112	108	105	103	110	107	104	102	104	102	100	101	99	98	98	97	96	94	93	93
3	108	104	101	98	107	103	100	97	100	98	96	98	96	94	96	94	93	92	91	91
4	105	100	97	94	104	99	96	93	97	95	92	96	93	91	94	92	90	89	88	88
5	103	97	93	90	101	96	93	90	95	92	89	93	91	89	92	90	88	87	86	86
6	100	94	90	87	99	93	90	87	92	89	87	91	88	86	90	87	86	85	84	84
7	97	91	88	85	96	91	87	85	90	87	84	89	86	84	88	85	83	83	82	82
8	95	89	85	83	94	89	85	82	88	84	82	87	84	82	86	83	81	81	80	80
9	93	87	83	80	92	86	83	80	86	82	80	85	82	80	84	82	80	79	78	78
10	91	85	81	78	90	84	81	78	84	80	78	83	80	78	82	80	78	77	76	76

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1803649
5°	1672833
10°	1297326
15°	650515
20°	213705
25°	84973
30°	31878
35°	9235
40°	4179
45°	1644
50°	1365
55°	1032
60°	1184
65°	1401
70°	833
75°	1101
80°	1642
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1644 cd/sqm

TEST NUMBER: P1255001

CATALOG NUMBER: P3AS17R259035DE010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	668.5	39.6
10°-20°	797.5	47.3
20°-30°	179.8	10.7
30°-40°	29.1	1.7
40°-50°	5.3	0.3
50°-60°	2.8	0.2
60°-70°	2.5	0.1
70°-80°	1.4	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1645.7	97.6
0°-40°	1674.9	99.3
0°-60°	1683.0	99.8
0°-90°	1687.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1687.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8225	
5°	7600	668
15°	2866	797
25°	351	180
35°	34	29
45°	5	5
55°	3	3
65°	3	3
75°	1	1
85°	0	0
90°	0	

TEST NUMBER: P1255001

CATALOG NUMBER: P3AS17R259035DE010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	8225.3
1°	8212.0
2°	8145.8
3°	8023.8
4°	7839.6
5°	7599.7
6°	7313.4
7°	7003.3
8°	6648.1
9°	6259.8
10°	5826.4
11°	5326.7
12°	4751.5
13°	4149.8
14°	3504.3
15°	2865.5
17.5°	1632.9
20°	915.8
22.5°	552.7
25°	351.2
27.5°	216.0
30°	125.9
32.5°	66.3
35°	34.5
37.5°	22.5
40°	14.6
42.5°	9.3
45°	5.3
47.5°	4.0
50°	4.0
52.5°	4.0
55°	2.7
57.5°	2.7
60°	2.7
62.5°	2.7
65°	2.7
67.5°	2.7
70°	1.3
72.5°	1.3
75°	1.3
77.5°	1.3
80°	1.3
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1255001
CATALOG NUMBER: P3AS17R259035DE010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)