

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1255261

Luminaire Tested: P3AS17R659035DE010 E3DLP1WMH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1255261
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-41)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS17R659035DE010 E3DLP1WMH
Description: 3in Adjustable LED luminaire with, R65 optic, 3500K CCT AND, 90CRI , E3DLP1WMH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 918.0 lumens
Efficiency: N/A
Efficacy: 43.3 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 21.2
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1255261

CATALOG NUMBER: P3AS17R659035DE010 E3DLP1WMH

Luminous Intensity Polar Plot

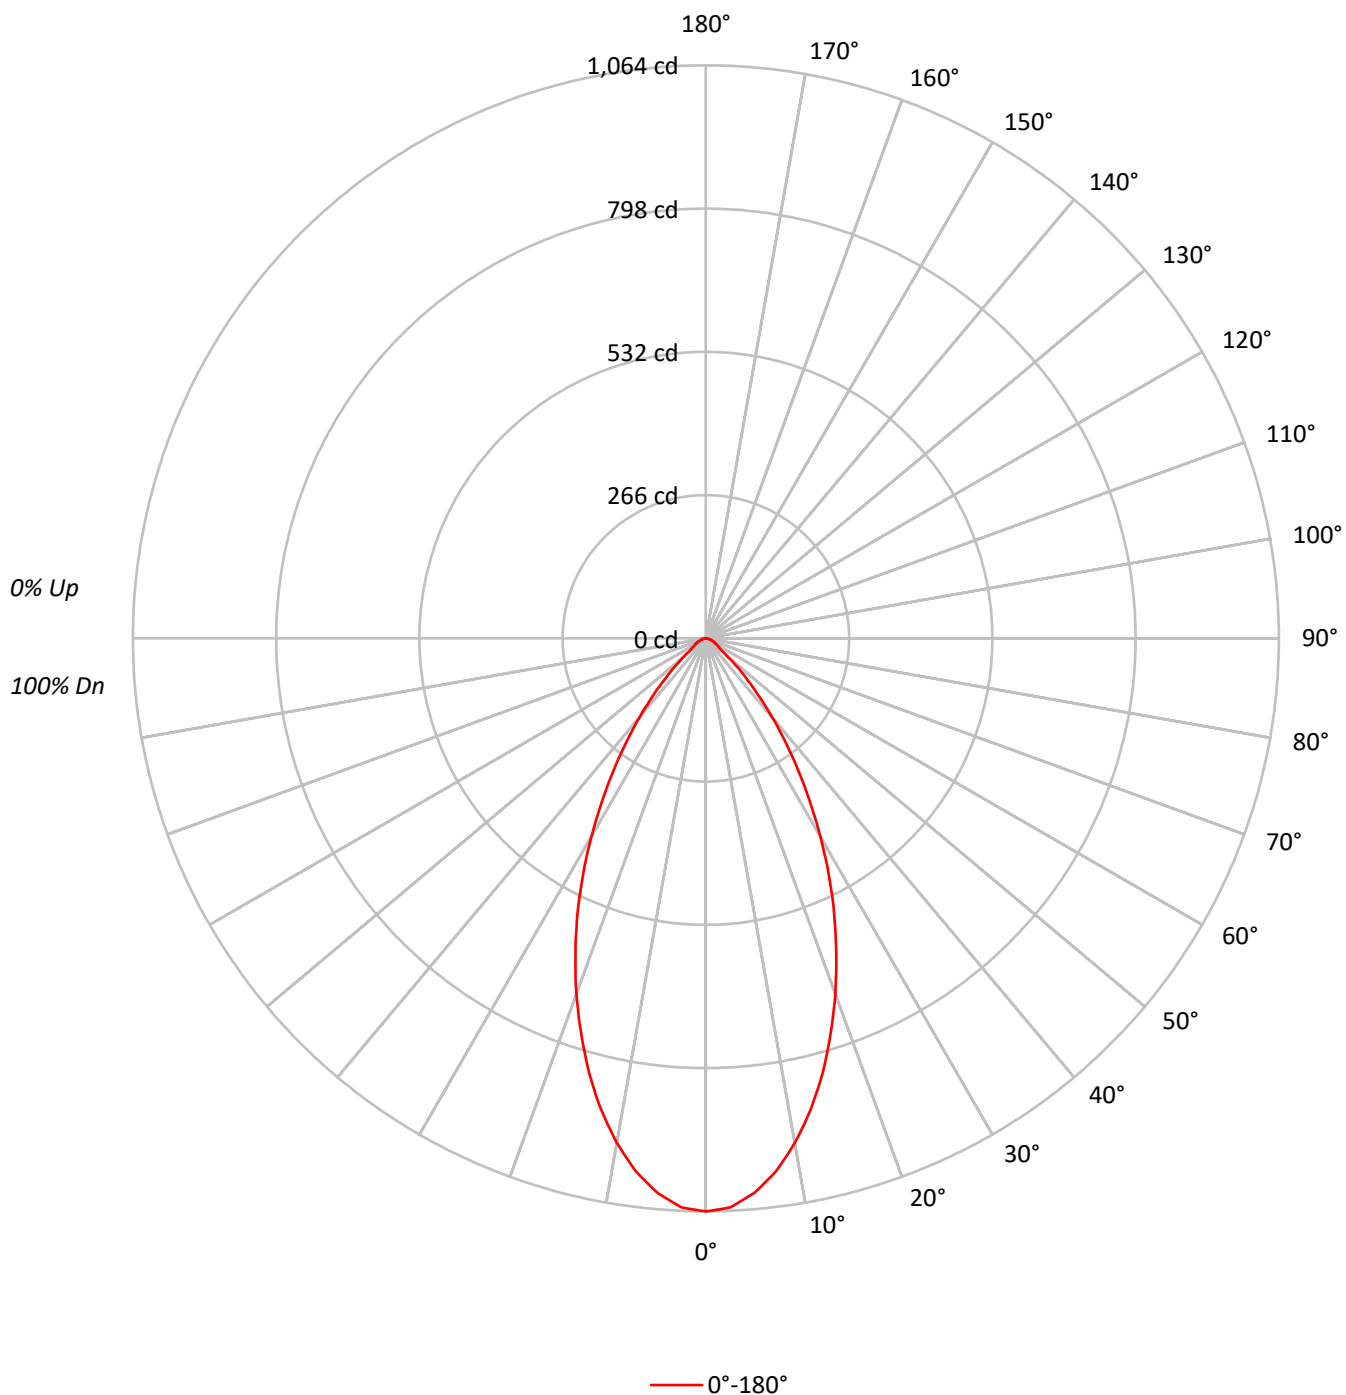

TEST NUMBER: P1255261

CATALOG NUMBER: P3AS17R659035DE010 E3DLP1WMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		90
3	101	94	88	84	99	92	87	83	90	85	82		87	84	81		85
4	95	87	81	76	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	59	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		59
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	233337
5°	227536
10°	211887
15°	189899
20°	164001
25°	136411
30°	107586
35°	79719
40°	54931
45°	34081
50°	18524
55°	11622
60°	9868
65°	8924
70°	7629
75°	6693
80°	6693
85°	6542

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 34081 cd/sqm

TEST NUMBER: P1255261

CATALOG NUMBER: P3AS17R659035DE010 E3DLP1WMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	96.1	10.5
10°-20°	232.5	25.3
20°-30°	257.1	28.0
30°-40°	186.7	20.3
40°-50°	87.5	9.5
50°-60°	29.5	3.2
60°-70°	17.0	1.9
70°-80°	8.9	1.0
80°-90°	2.9	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	585.6	63.8
0°-40°	772.3	84.1
0°-60°	889.2	96.9
0°-90°	918.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	918.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1064	
5°	1034	96
15°	836	232
25°	564	257
35°	298	187
45°	110	87
55°	30	29
65°	17	17
75°	8	9
85°	3	3
90°	0	

TEST NUMBER: P1255261

CATALOG NUMBER: P3AS17R659035DE010 E3DLP1WMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1064.1
2.5°	1057.5
5°	1033.7
7.5°	997.9
10°	951.6
12.5°	897.4
15°	836.5
17.5°	770.3
20°	702.8
22.5°	632.6
25°	563.8
27.5°	493.7
30°	424.9
32.5°	358.7
35°	297.8
37.5°	242.2
40°	191.9
42.5°	146.9
45°	109.9
47.5°	79.4
50°	54.3
52.5°	37.1
55°	30.4
57.5°	26.5
60°	22.5
62.5°	19.9
65°	17.2
67.5°	14.6
70°	11.9
72.5°	10.6
75°	7.9
77.5°	6.6
80°	5.3
82.5°	4.0
85°	2.6
87.5°	1.3
90°	0.0

(END OF REPORT)