

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1255346

Luminaire Tested: P3AS20R259035D010 E3CB1MMS

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1255346
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R259035D010 E3CB1MMS
Description: 3in Adjustable LED luminaire with, R25 optic, 3500K CCT AND, 90CRI , E3CB1MMS TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2214.0 lumens
Efficiency: N/A
Efficacy: 76.9 lumens/watt
Spacing Criteria (0/90/45): 0.45 / 0.45 / 0.41
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1255346

CATALOG NUMBER: P3AS20R259035D010 E3CB1MMS

Luminous Intensity Polar Plot

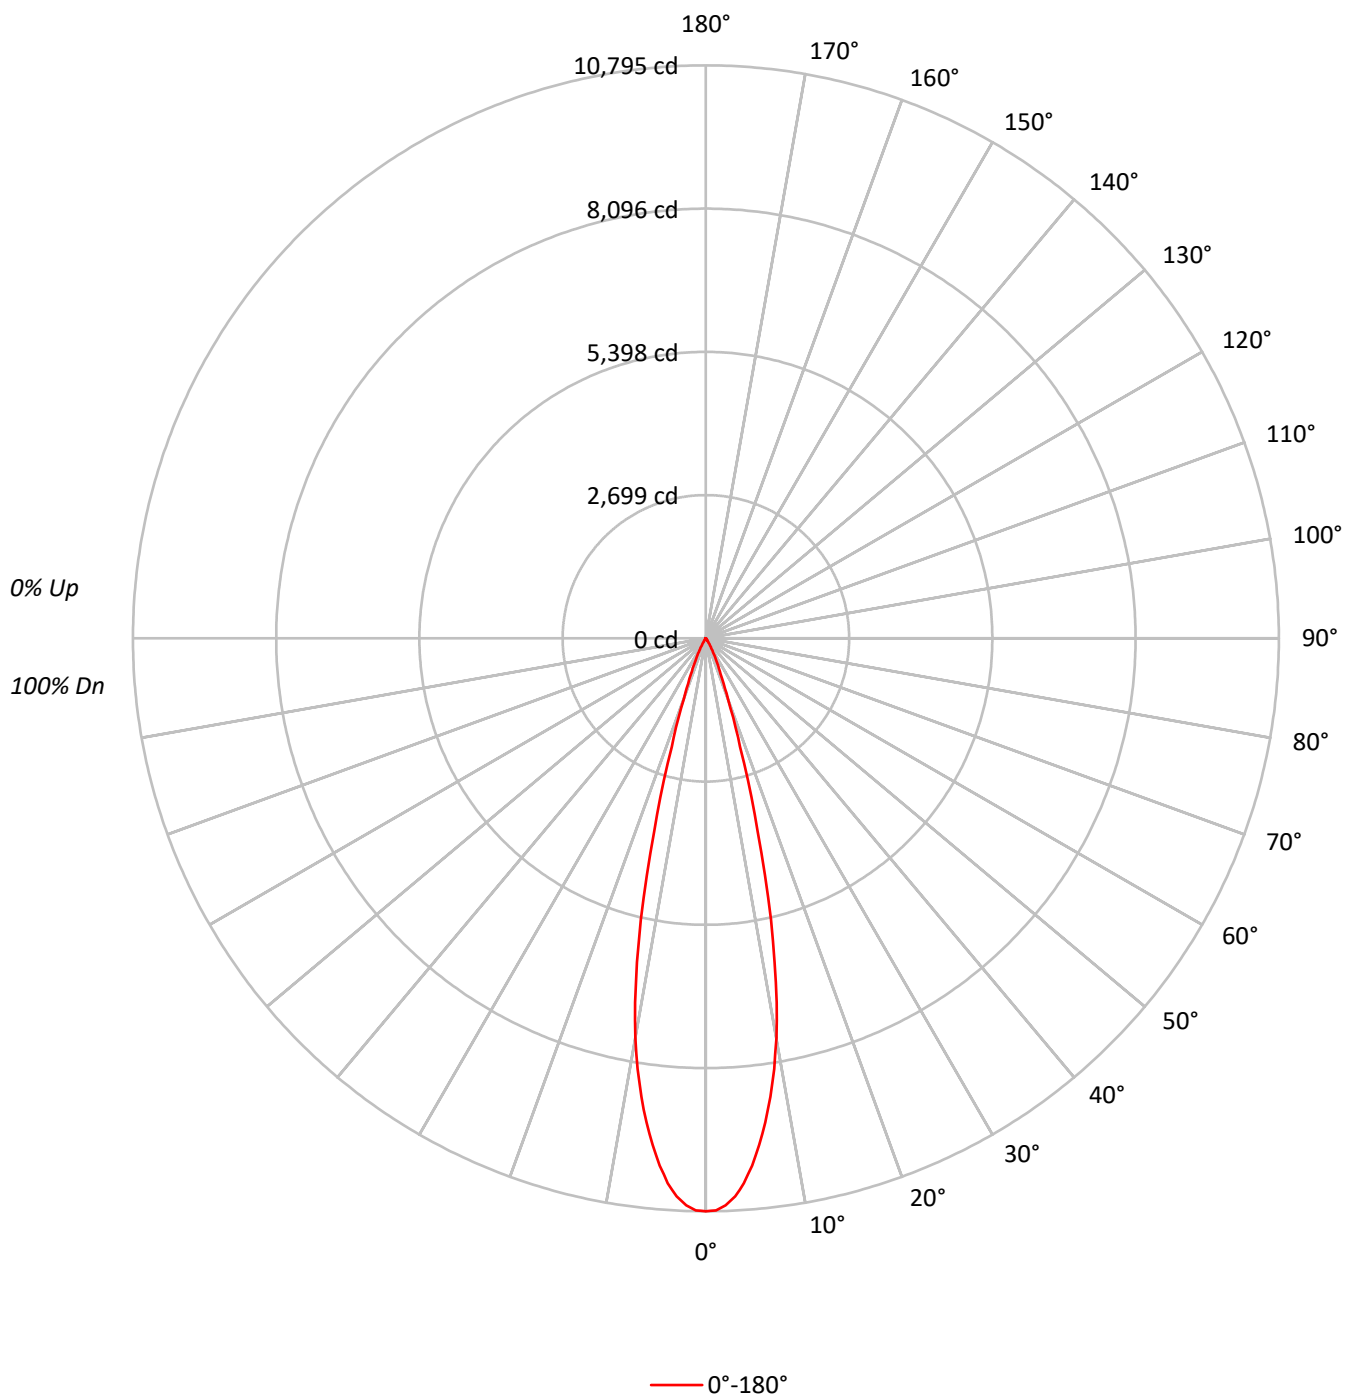

TEST NUMBER: P1255346

CATALOG NUMBER: P3AS20R259035D010 E3CB1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	113	111	110	113	111	109	108	107	106	105		103	103	102		100
2	112	108	105	103	110	107	104	102	104	102	100		101	99	98		98
3	108	104	101	98	107	103	100	97	100	98	96		98	96	94		96
4	105	100	97	94	104	99	96	93	97	95	92		96	93	91		94
5	103	97	93	90	101	96	93	90	95	92	89		93	91	89		92
6	100	94	90	87	99	93	90	87	92	89	87		91	88	86		90
7	97	91	88	85	96	91	87	85	90	87	84		89	86	84		88
8	95	89	85	83	94	89	85	82	88	84	82		87	84	82		86
9	93	87	83	80	92	86	83	80	86	82	80		85	82	80		84
10	91	85	81	78	90	84	81	78	84	80	78		83	80	78		82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2367091
5°	2195416
10°	1702574
15°	853717
20°	280468
25°	111515
30°	41829
35°	12100
40°	5467
45°	2171
50°	1774
55°	1338
60°	1535
65°	1816
70°	1090
75°	1440
80°	2147
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2171 cd/sqm

TEST NUMBER: P1255346

CATALOG NUMBER: P3AS20R259035D010 E3CB1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	877.3	39.6
10°-20°	1046.6	47.3
20°-30°	235.9	10.7
30°-40°	38.2	1.7
40°-50°	6.9	0.3
50°-60°	3.7	0.2
60°-70°	3.2	0.1
70°-80°	1.8	0.1
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2159.8	97.6
0°-40°	2198.1	99.3
0°-60°	2208.7	99.8
0°-90°	2214.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2214.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	10795	
5°	9974	877
15°	3761	1047
25°	461	236
35°	45	38
45°	7	7
55°	4	4
65°	4	3
75°	2	2
85°	0	0
90°	0	

TEST NUMBER: P1255346

CATALOG NUMBER: P3AS20R259035D010 E3CB1MMS

CANDELA DISTRIBUTION (FULL):

0°	
0°	10794.8
1°	10777.4
2°	10690.4
3°	10530.4
4°	10288.6
5°	9973.8
6°	9598.1
7°	9191.0
8°	8724.9
9°	8215.2
10°	7646.4
11°	6990.7
12°	6235.8
13°	5446.1
14°	4599.0
15°	3760.6
17.5°	2143.0
20°	1201.9
22.5°	725.3
25°	460.9
27.5°	283.5
30°	165.2
32.5°	87.0
35°	45.2
37.5°	29.6
40°	19.1
42.5°	12.2
45°	7.0
47.5°	5.2
50°	5.2
52.5°	5.2
55°	3.5
57.5°	3.5
60°	3.5
62.5°	3.5
65°	3.5
67.5°	3.5
70°	1.7
72.5°	1.7
75°	1.7
77.5°	1.7
80°	1.7
82.5°	0.0
85°	0.0
87.5°	0.0



TEST NUMBER: P1255346

CATALOG NUMBER: P3AS20R259035D010 E3CB1MMS

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0

(END OF REPORT)