

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1255619

Luminaire Tested: P3AS20R709035D010 E3DL1H

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1255619
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-47)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS20R709035D010 E3DL1H
Description: 3in Adjustable LED luminaire with, R70 optic, 3500K CCT AND, 90CRI , E3DL1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1751.0 lumens
Efficiency: N/A
Efficacy: 60.8 lumens/watt
Spacing Criteria (0/90/45): 0.97 / 0.97 / 0.98
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1255619

CATALOG NUMBER: P3AS20R709035D010 E3DL1H

Luminous Intensity Polar Plot

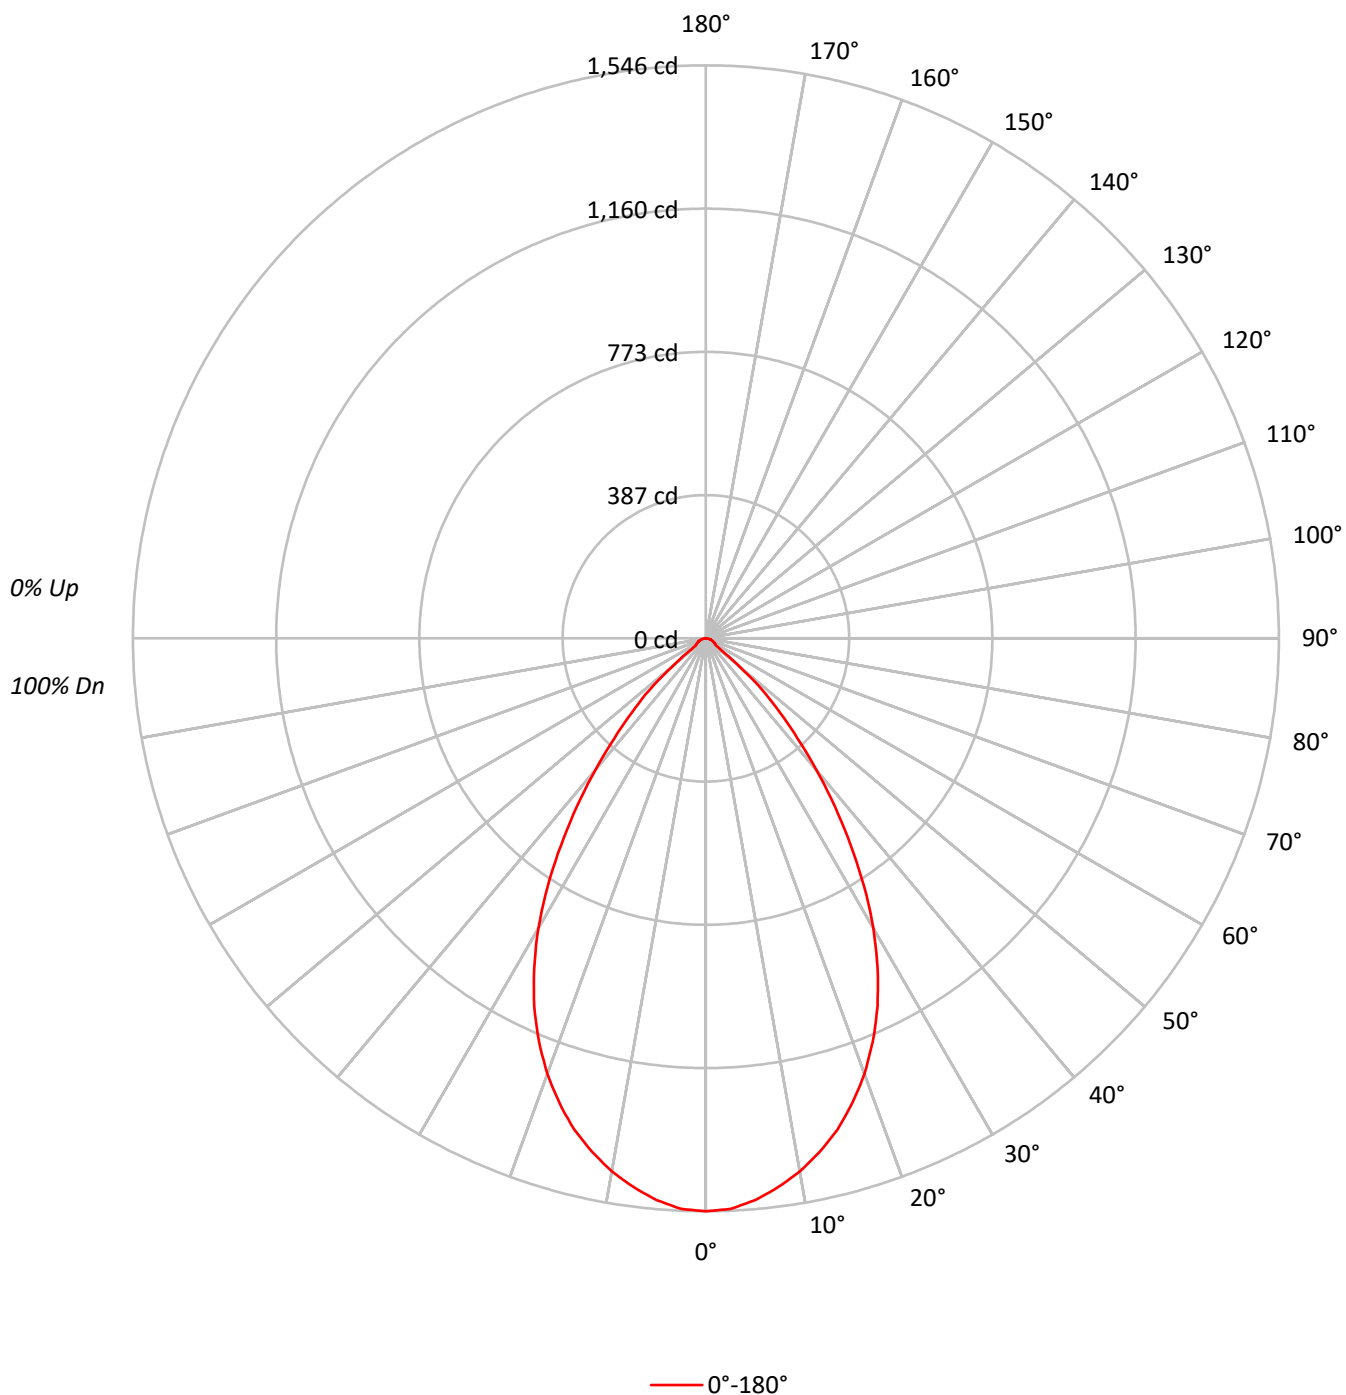

TEST NUMBER: P1255619

CATALOG NUMBER: P3AS20R709035D010 E3DL1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	104	110	107	105	103	103	101	100		100	98	97		96
2	106	101	96	93	104	99	95	92	96	93	90		93	90	88		90
3	100	93	88	83	98	92	87	82	89	85	81		86	83	80		84
4	94	86	80	75	93	85	79	75	83	78	74		81	76	73		79
5	89	80	73	69	87	79	73	68	77	72	68		75	71	67		74
6	84	74	68	63	82	73	67	63	72	66	62		70	65	62		69
7	79	69	62	58	78	68	62	58	67	61	57		66	61	57		65
8	75	65	58	53	74	64	58	53	63	57	53		62	57	53		61
9	71	60	54	50	70	60	54	50	59	53	49		58	53	49		57
10	67	57	50	46	66	56	50	46	55	50	46		55	49	46		54

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	338986
5°	334910
10°	325244
15°	311466
20°	291762
25°	265056
30°	228947
35°	182459
40°	132906
45°	87358
50°	40937
55°	12616
60°	12192
65°	11726
70°	11156
75°	11777
80°	10986
85°	8806

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 87358 cd/sqm

TEST NUMBER: P1255619

CATALOG NUMBER: P3AS20R709035D010 E3DL1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	143.3	8.2
10°-20°	384.0	21.9
20°-30°	499.0	28.5
30°-40°	423.5	24.2
40°-50°	218.3	12.5
50°-60°	42.1	2.4
60°-70°	22.8	1.3
70°-80°	14.0	0.8
80°-90°	4.0	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1026.3	58.6
0°-40°	1449.8	82.8
0°-60°	1710.2	97.7
0°-90°	1751.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1751.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1546	
5°	1522	143
15°	1372	384
25°	1096	499
35°	682	423
45°	282	218
55°	33	42
65°	23	23
75°	14	14
85°	4	4
90°	0	

TEST NUMBER: P1255619

CATALOG NUMBER: P3AS20R709035D010 E3DL1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	1545.9
2.5°	1540.6
5°	1521.5
7.5°	1493.7
10°	1460.7
12.5°	1418.9
15°	1372.0
17.5°	1314.6
20°	1250.3
22.5°	1177.2
25°	1095.5
27.5°	1003.3
30°	904.2
32.5°	794.7
35°	681.6
37.5°	570.4
40°	464.3
42.5°	365.2
45°	281.7
47.5°	206.9
50°	120.0
52.5°	52.2
55°	33.0
57.5°	31.3
60°	27.8
62.5°	26.1
65°	22.6
67.5°	20.9
70°	17.4
72.5°	15.6
75°	13.9
77.5°	10.4
80°	8.7
82.5°	5.2
85°	3.5
87.5°	1.7
90°	0.0

(END OF REPORT)