

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1255763

Luminaire Tested: P3AS24R359035D010 E3DL1LI

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1255763  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-19)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS24R359035D010 E3DL1LI  
Description: 3in Adjustable LED luminaire with, R35 optic, 3500K CCT AND, 90CRI , E3DL1LI TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 2143.9 lumens  
Efficiency: N/A  
Efficacy: 74.4 lumens/watt  
Spacing Criteria (0/90/45): 0.58 / 0.58 / 0.58  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 28.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1255763

CATALOG NUMBER: P3AS24R359035D010 E3DL1LI

### Luminous Intensity Polar Plot

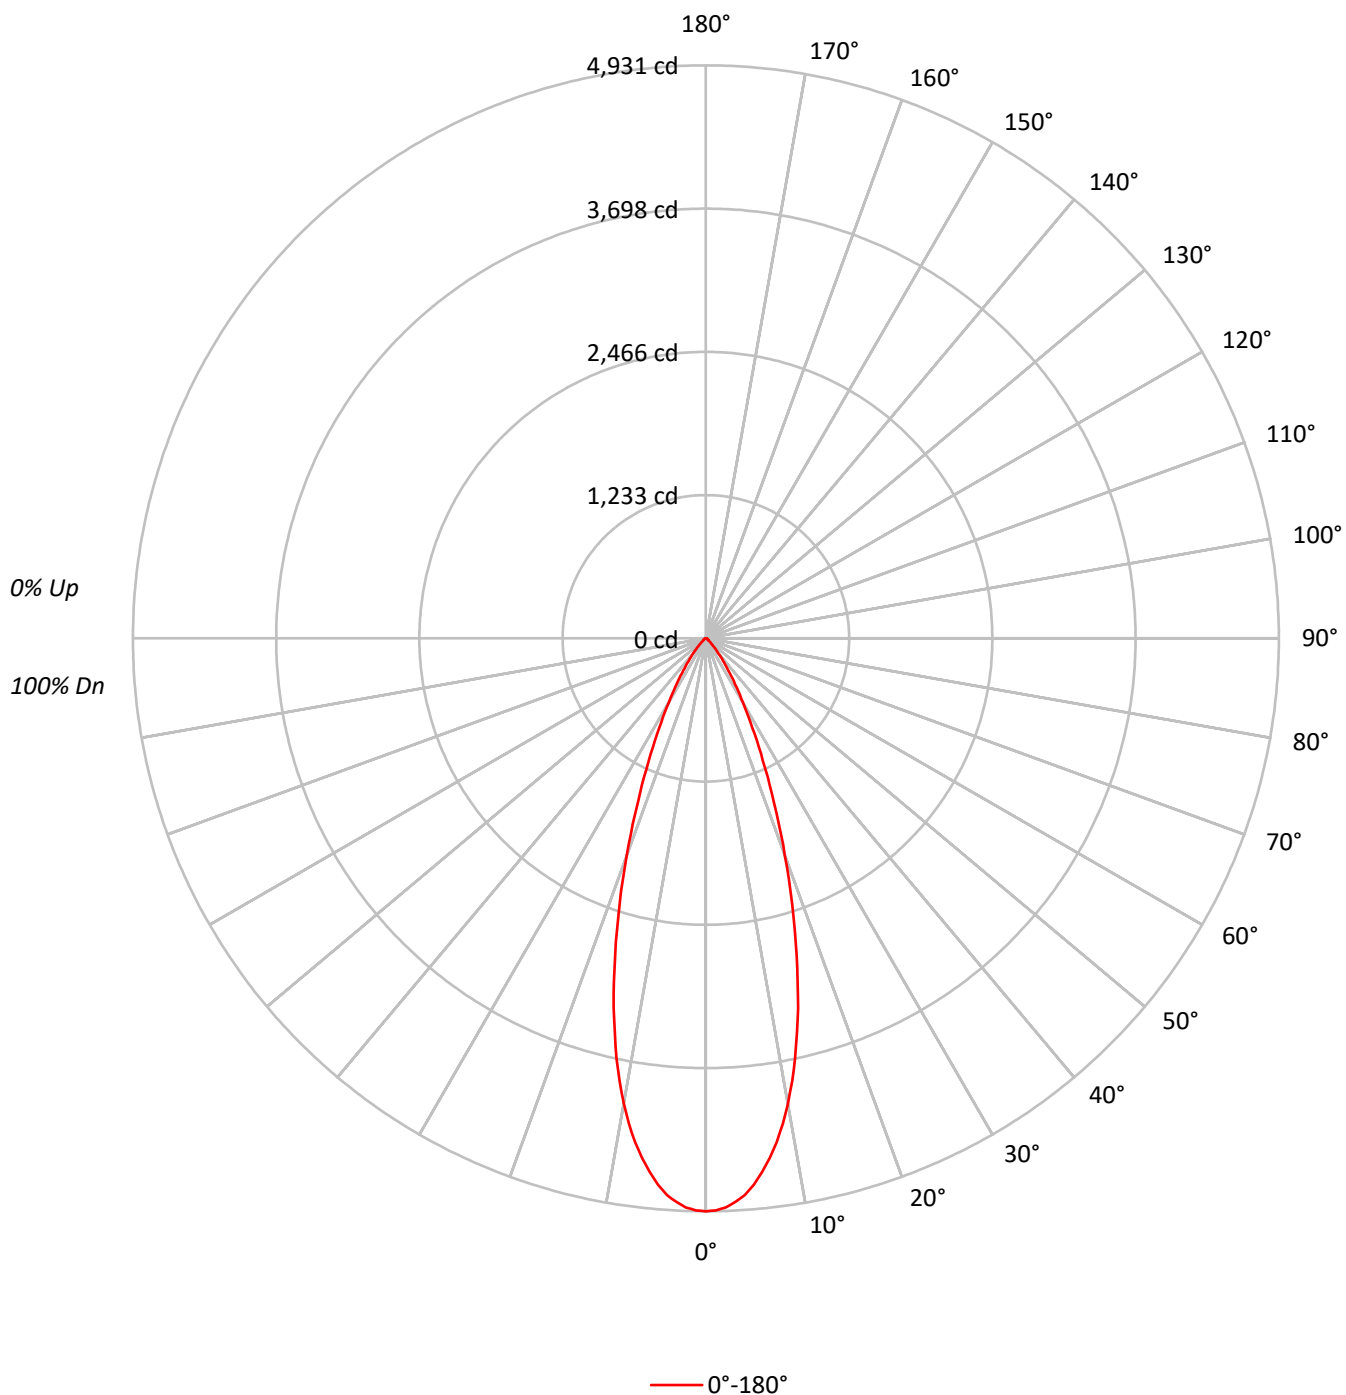

TEST NUMBER: P1255763

CATALOG NUMBER: P3AS24R359035D010 E3DL1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
|-----|-----|-----|-----|-----|--|-----|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|--|-----|-----|-----|
| RF  | 20  |     |     |     |  | 20  |     |     |     |  | 20  |     |     |  |     | 20  |     |  |     |     | 20  |
| RC  | 80  |     |     |     |  | 70  |     |     |     |  | 50  |     |     |  |     | 30  |     |  |     |     | 10  |
| RW  | 70  | 50  | 30  | 10  |  | 70  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |  | 50  | 30  | 10  |
| RCR |     |     |     |     |  |     |     |     |     |  |     |     |     |  |     |     |     |  |     |     |     |
| 0   | 119 | 119 | 119 | 119 |  | 116 | 116 | 116 | 116 |  | 111 | 111 | 111 |  | 106 | 106 | 106 |  | 102 | 102 | 102 |
| 1   | 114 | 112 | 109 | 107 |  | 112 | 109 | 107 | 106 |  | 105 | 104 | 102 |  | 102 | 100 | 99  |  | 98  | 97  | 96  |
| 2   | 109 | 105 | 101 | 98  |  | 107 | 103 | 100 | 97  |  | 100 | 97  | 95  |  | 97  | 95  | 93  |  | 94  | 93  | 91  |
| 3   | 105 | 99  | 95  | 91  |  | 103 | 98  | 94  | 90  |  | 95  | 92  | 89  |  | 93  | 90  | 88  |  | 91  | 88  | 86  |
| 4   | 100 | 94  | 89  | 85  |  | 99  | 93  | 88  | 85  |  | 91  | 87  | 84  |  | 89  | 85  | 83  |  | 87  | 84  | 82  |
| 5   | 96  | 89  | 84  | 80  |  | 95  | 88  | 83  | 80  |  | 86  | 82  | 79  |  | 85  | 81  | 78  |  | 83  | 80  | 78  |
| 6   | 92  | 85  | 80  | 76  |  | 91  | 84  | 79  | 76  |  | 83  | 78  | 75  |  | 81  | 77  | 75  |  | 80  | 77  | 74  |
| 7   | 89  | 81  | 76  | 72  |  | 88  | 80  | 75  | 72  |  | 79  | 75  | 71  |  | 78  | 74  | 71  |  | 77  | 73  | 71  |
| 8   | 85  | 77  | 72  | 69  |  | 84  | 77  | 72  | 68  |  | 76  | 71  | 68  |  | 75  | 71  | 68  |  | 74  | 70  | 68  |
| 9   | 82  | 74  | 69  | 66  |  | 81  | 74  | 69  | 65  |  | 73  | 68  | 65  |  | 72  | 68  | 65  |  | 71  | 68  | 65  |
| 10  | 79  | 71  | 66  | 63  |  | 78  | 71  | 66  | 63  |  | 70  | 66  | 63  |  | 69  | 65  | 62  |  | 69  | 65  | 62  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 1081339 |
| 5°  | 1039222 |
| 10° | 905483  |
| 15° | 693534  |
| 20° | 464000  |
| 25° | 280758  |
| 30° | 161113  |
| 35° | 90078   |
| 40° | 47861   |
| 45° | 24654   |
| 50° | 11838   |
| 55° | 9366    |
| 60° | 8947    |
| 65° | 7420    |
| 70° | 7822    |
| 75° | 6947    |
| 80° | 7703    |
| 85° | 5032    |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 24654 cd/sqm

TEST NUMBER: P1255763

CATALOG NUMBER: P3AS24R359035D010 E3DL1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 429.6  | 20.0      |
| 10°-20°   | 832.4  | 38.8      |
| 20°-30°   | 545.0  | 25.4      |
| 30°-40°   | 221.1  | 10.3      |
| 40°-50°   | 66.3   | 3.1       |
| 50°-60°   | 22.5   | 1.1       |
| 60°-70°   | 15.1   | 0.7       |
| 70°-80°   | 8.9    | 0.4       |
| 80°-90°   | 3.0    | 0.1       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 1807.0 | 84.3      |
| 0°-40°    | 2028.1 | 94.6      |
| 0°-60°    | 2116.9 | 98.7      |
| 0°-90°    | 2143.9 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 2143.9 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 4931 |      |
| 5°  | 4721 | 430  |
| 15° | 3055 | 832  |
| 25° | 1160 | 545  |
| 35° | 336  | 221  |
| 45° | 80   | 66   |
| 55° | 24   | 23   |
| 65° | 14   | 15   |
| 75° | 8    | 9    |
| 85° | 2    | 3    |
| 90° | 0    |      |

TEST NUMBER: P1255763

CATALOG NUMBER: P3AS24R359035D010 E3DL1LI

**CANDELA DISTRIBUTION (FULL):**

| 0°    |        |
|-------|--------|
| 0°    | 4931.3 |
| 1°    | 4923.1 |
| 2°    | 4900.7 |
| 3°    | 4855.8 |
| 4°    | 4802.8 |
| 5°    | 4721.2 |
| 6°    | 4619.3 |
| 7°    | 4505.1 |
| 8°    | 4376.6 |
| 9°    | 4229.7 |
| 10°   | 4066.6 |
| 11°   | 3885.1 |
| 12°   | 3695.4 |
| 13°   | 3483.3 |
| 14°   | 3281.4 |
| 15°   | 3055.0 |
| 17.5° | 2506.4 |
| 20°   | 1988.4 |
| 22.5° | 1529.6 |
| 25°   | 1160.4 |
| 27.5° | 864.7  |
| 30°   | 636.3  |
| 32.5° | 467.0  |
| 35°   | 336.5  |
| 37.5° | 238.6  |
| 40°   | 167.2  |
| 42.5° | 116.2  |
| 45°   | 79.5   |
| 47.5° | 53.0   |
| 50°   | 34.7   |
| 52.5° | 26.5   |
| 55°   | 24.5   |
| 57.5° | 22.4   |
| 60°   | 20.4   |
| 62.5° | 18.4   |
| 65°   | 14.3   |
| 67.5° | 12.2   |
| 70°   | 12.2   |
| 72.5° | 10.2   |
| 75°   | 8.2    |
| 77.5° | 6.1    |
| 80°   | 6.1    |
| 82.5° | 4.1    |
| 85°   | 2.0    |
| 87.5° | 2.0    |



TEST NUMBER: P1255763

CATALOG NUMBER: P3AS24R359035D010 E3DL1LI

CANDELA DISTRIBUTION (continued):



(END OF REPORT)