

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1255789

Luminaire Tested: P3AS24R409035D010 E3D1LI

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1255789
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-12)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R409035D010 E3D1LI
Description: 3in Adjustable LED luminaire with, R40 optic, 3500K CCT AND, 90CRI , E3D1LI TRIM
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2857.0 lumens
Efficiency: N/A
Efficacy: 99.2 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.6
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1255789
CATALOG NUMBER: P3AS24R409035D010 E3D1LI

Luminous Intensity Polar Plot

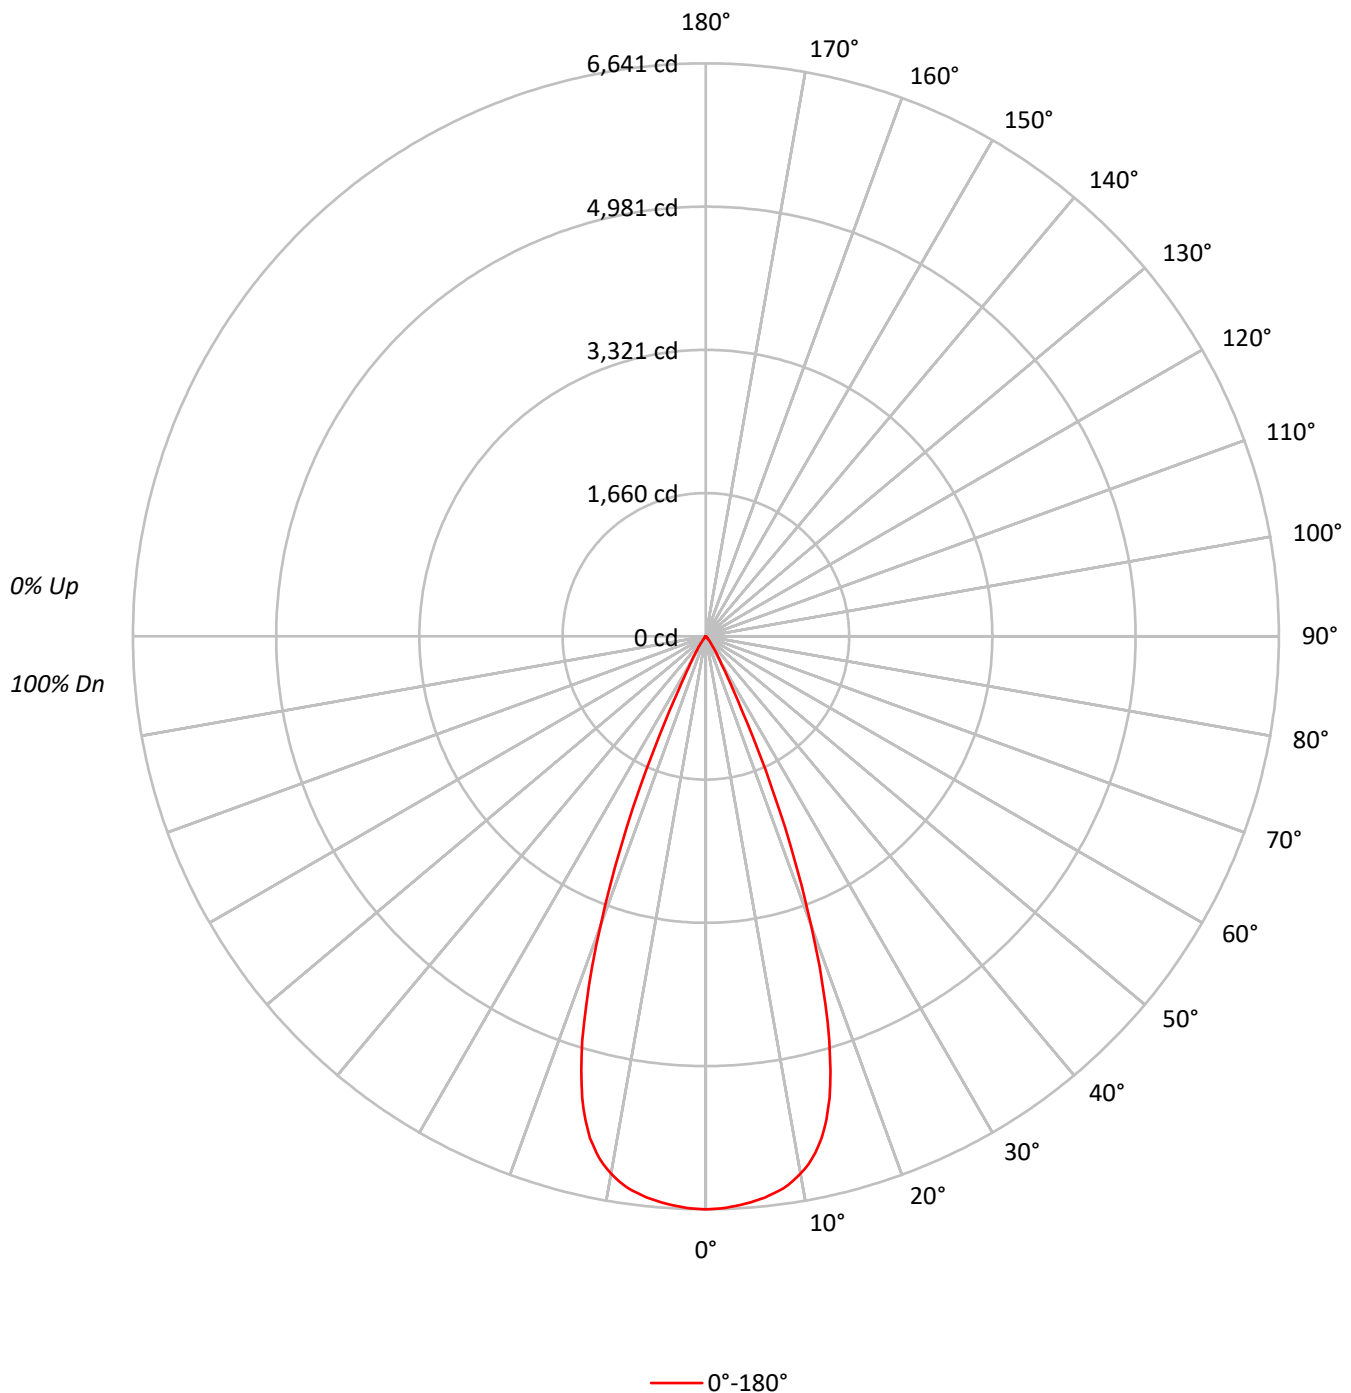

TEST NUMBER: P1255789

CATALOG NUMBER: P3AS24R409035D010 E3D1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	115	112	110	109	112	110	109	107	106	105	104		103	102	101		99
2	111	107	104	101	109	105	102	100	102	100	98		99	97	96		96
3	107	102	98	95	105	100	97	94	98	95	93		96	93	91		93
4	103	97	93	90	101	96	92	89	94	91	88		92	89	87		90
5	99	93	89	85	98	92	88	85	91	87	84		89	86	84		88
6	96	89	85	81	95	89	84	81	87	83	81		86	83	80		85
7	93	86	81	78	92	85	81	78	84	80	77		83	80	77		82
8	90	83	78	75	89	82	78	75	81	77	75		80	77	74		79
9	87	80	75	72	86	79	75	72	78	75	72		78	74	72		77
10	84	77	72	70	83	77	72	69	76	72	69		75	72	69		74

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1456287
5°	1445759
10°	1407923
15°	1257669
20°	833913
25°	312405
30°	83582
35°	32658
40°	11736
45°	5582
50°	1706
55°	765
60°	439
65°	519
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 5582 cd/sqm

TEST NUMBER: P1255789

CATALOG NUMBER: P3AS24R409035D010 E3D1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	619.8	21.7
10°-20°	1467.9	51.4
20°-30°	665.7	23.3
30°-40°	86.3	3.0
40°-50°	14.9	0.5
50°-60°	1.8	0.1
60°-70°	0.6	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2753.4	96.4
0°-40°	2839.7	99.4
0°-60°	2856.4	100.0
0°-90°	2857.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2857.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6641	
5°	6568	620
15°	5540	1468
25°	1291	666
35°	122	86
45°	18	15
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1255789

CATALOG NUMBER: P3AS24R409035D010 E3D1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	6641.2
1°	6637.2
2°	6627.2
3°	6612.2
4°	6593.2
5°	6568.1
6°	6539.1
7°	6503.1
8°	6459.1
9°	6399.1
10°	6323.1
11°	6234.1
12°	6115.1
13°	5968.0
14°	5776.0
15°	5540.0
16°	5238.9
17°	4895.9
18°	4483.8
19°	4048.7
20°	3573.6
21°	3098.5
22°	2630.5
23°	2164.4
24°	1706.3
25°	1291.2
26°	956.2
27°	700.1
28°	526.1
29°	409.1
30°	330.1
31°	273.0
32°	228.0
32.5°	208.0
33°	188.0
34°	153.0
35°	122.0
36°	96.0
37°	76.0
37.5°	68.0
38°	60.0
39°	50.0
40°	41.0
42.5°	27.0
45°	18.0

TEST NUMBER: P1255789

CATALOG NUMBER: P3AS24R409035D010 E3D1LI

CANDELA DISTRIBUTION (continued):

	0°
47.5°	11.0
50°	5.0
52.5°	2.0
55°	2.0
57.5°	1.0
60°	1.0
62.5°	1.0
65°	1.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)