

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1255917

Luminaire Tested: P3AS24R609035D010 E3DLP1GPH

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1255917
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-37)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS24R609035D010 E3DLP1GPH
Description: 3in Adjustable LED luminaire with, R60 optic, 3500K CCT AND, 90CRI , E3DLP1GPH TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 727.0 lumens
Efficiency: N/A
Efficacy: 25.2 lumens/watt
Spacing Criteria (0/90/45): 0.79 / 0.79 / 0.83
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 28.8
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1255917

CATALOG NUMBER: P3AS24R609035D010 E3DLP1GPH

Luminous Intensity Polar Plot

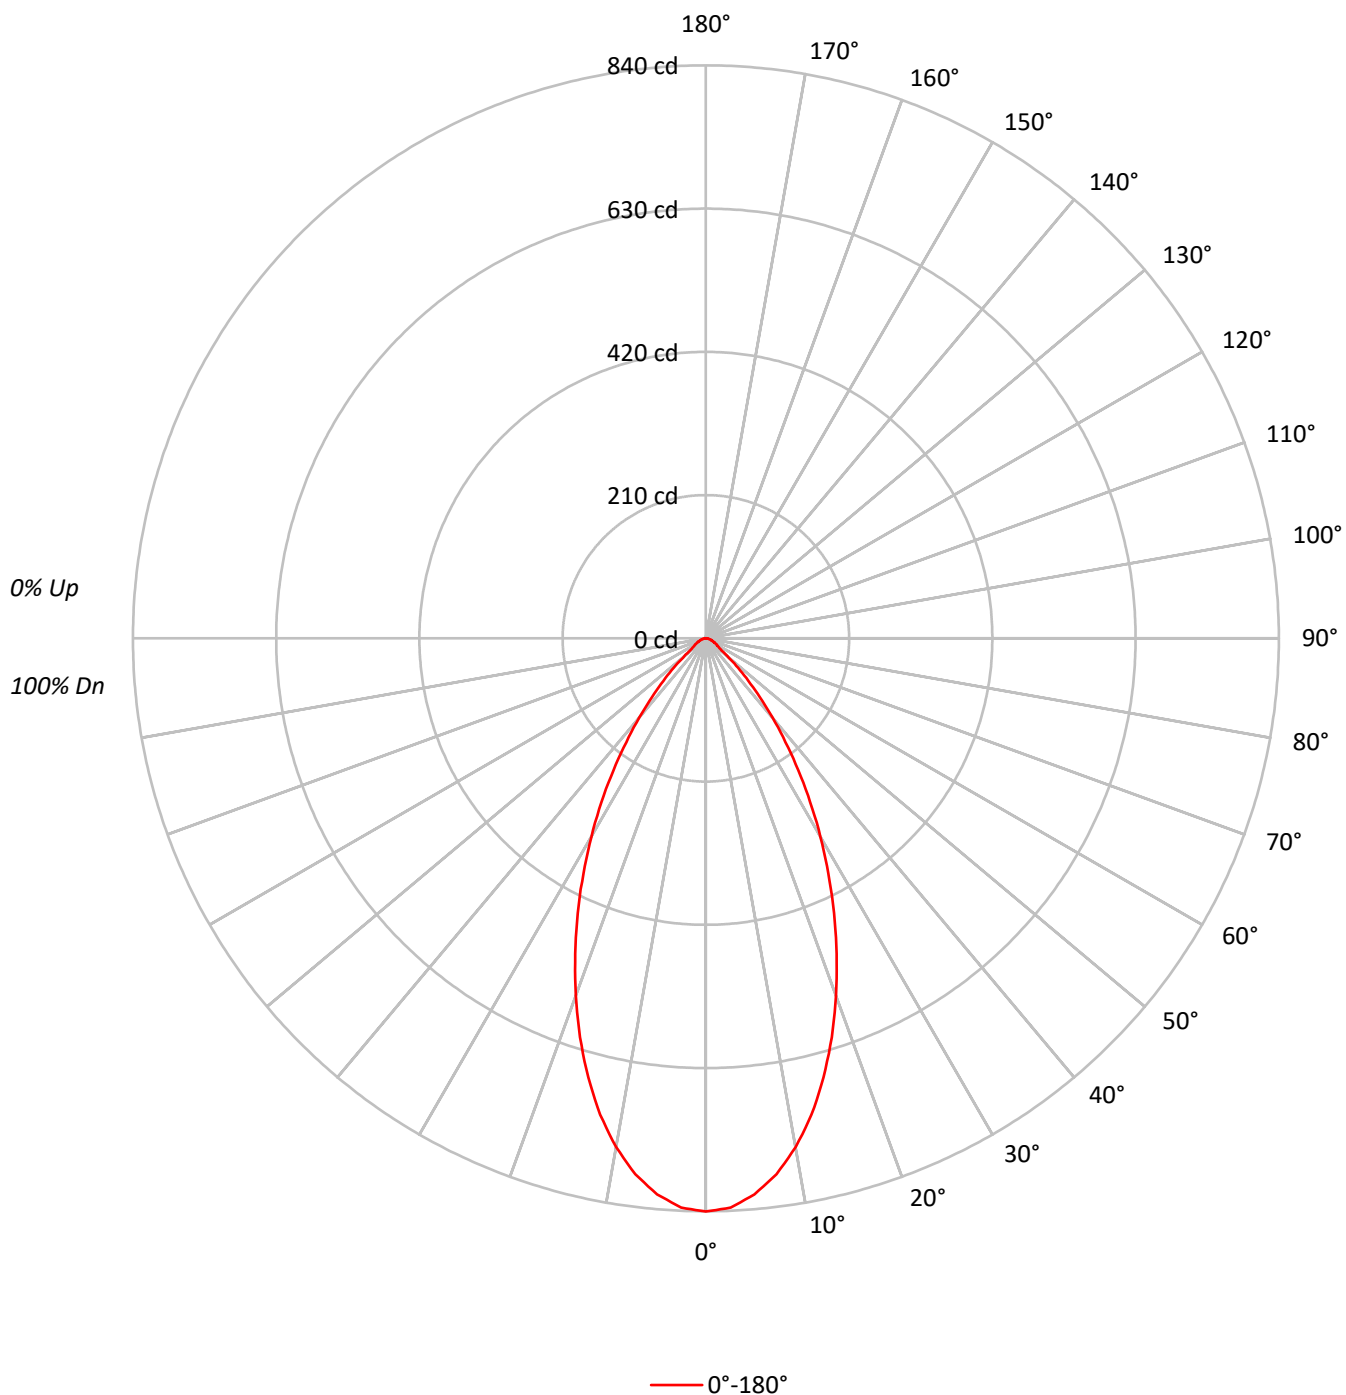

TEST NUMBER: P1255917

CATALOG NUMBER: P3AS24R609035D010 E3DLP1GPH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	113	110	107	105	110	108	105	103	104	102	100		100	98	97		96
2	107	101	97	93	104	100	96	92	96	93	90		93	91	88		91
3	101	94	88	84	99	92	87	83	90	86	82		87	84	81		85
4	95	87	81	77	93	86	80	76	84	79	75		82	78	74		80
5	90	81	75	70	88	80	74	70	78	73	69		77	72	69		75
6	85	76	69	65	84	75	69	65	73	68	64		72	67	64		71
7	81	71	65	60	79	70	64	60	69	64	60		68	63	59		67
8	77	67	60	56	75	66	60	56	65	60	56		64	59	55		63
9	73	63	57	52	72	62	56	52	61	56	52		60	55	52		60
10	69	59	53	49	68	59	53	49	58	53	49		57	52	49		56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	184240
5°	180101
10°	168623
15°	151284
20°	130095
25°	107571
30°	85000
35°	63122
40°	43481
45°	27259
50°	15010
55°	8793
60°	7894
65°	6745
70°	5770
75°	5931
80°	5051
85°	5032

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 27259 cd/sqm

TEST NUMBER: P1255917

CATALOG NUMBER: P3AS24R609035D010 E3DLP1GPH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.2	10.5
10°-20°	185.1	25.5
20°-30°	203.0	27.9
30°-40°	147.9	20.3
40°-50°	69.9	9.6
50°-60°	22.9	3.2
60°-70°	13.0	1.8
70°-80°	7.0	1.0
80°-90°	2.2	0.3
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	464.2	63.9
0°-40°	612.1	84.2
0°-60°	704.9	97.0
0°-90°	727.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	727.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	840	
5°	818	76
15°	666	185
25°	445	203
35°	236	148
45°	88	70
55°	23	23
65°	13	13
75°	7	7
85°	2	2
90°	0	

TEST NUMBER: P1255917

CATALOG NUMBER: P3AS24R609035D010 E3DLP1GPH

CANDELA DISTRIBUTION (FULL):

	0°
0°	840.2
2.5°	835.2
5°	818.2
7.5°	792.3
10°	757.3
12.5°	715.3
15°	666.4
17.5°	613.4
20°	557.5
22.5°	500.5
25°	444.6
27.5°	388.6
30°	335.7
32.5°	284.7
35°	235.8
37.5°	191.8
40°	151.9
42.5°	116.9
45°	87.9
47.5°	63.9
50°	44.0
52.5°	29.0
55°	23.0
57.5°	20.0
60°	18.0
62.5°	15.0
65°	13.0
67.5°	11.0
70°	9.0
72.5°	8.0
75°	7.0
77.5°	5.0
80°	4.0
82.5°	3.0
85°	2.0
87.5°	1.0
90°	0.0

(END OF REPORT)