

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256163

Luminaire Tested: P3AS02R259040DE010 E3DLD1WMH

Issue Date: 1/30/2026

**Test Information**

Test Method: LM-79-2019  
Report Number: P1256163  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-10)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/30/2026  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: IRiS  
Catalog Number: P3AS02R259040DE010 E3DLD1WMH  
Description: 3in Adjustable LED luminaire with, R25 optic, 4000K CCT AND, 90CRI , E3DLD1WMH TRIM  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 210.1 lumens  
Efficiency: N/A  
Efficacy: 58.4 lumens/watt  
Spacing Criteria (0/90/45): 0.78 / 0.78 / 0.85  
Luminous Opening: Circular (Dia: 0.25' x H: 0')  
CIE Type: Direct

Input Watts (W): 3.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P1256163

CATALOG NUMBER: P3AS02R259040DE010 E3DLD1WMH

### Luminous Intensity Polar Plot

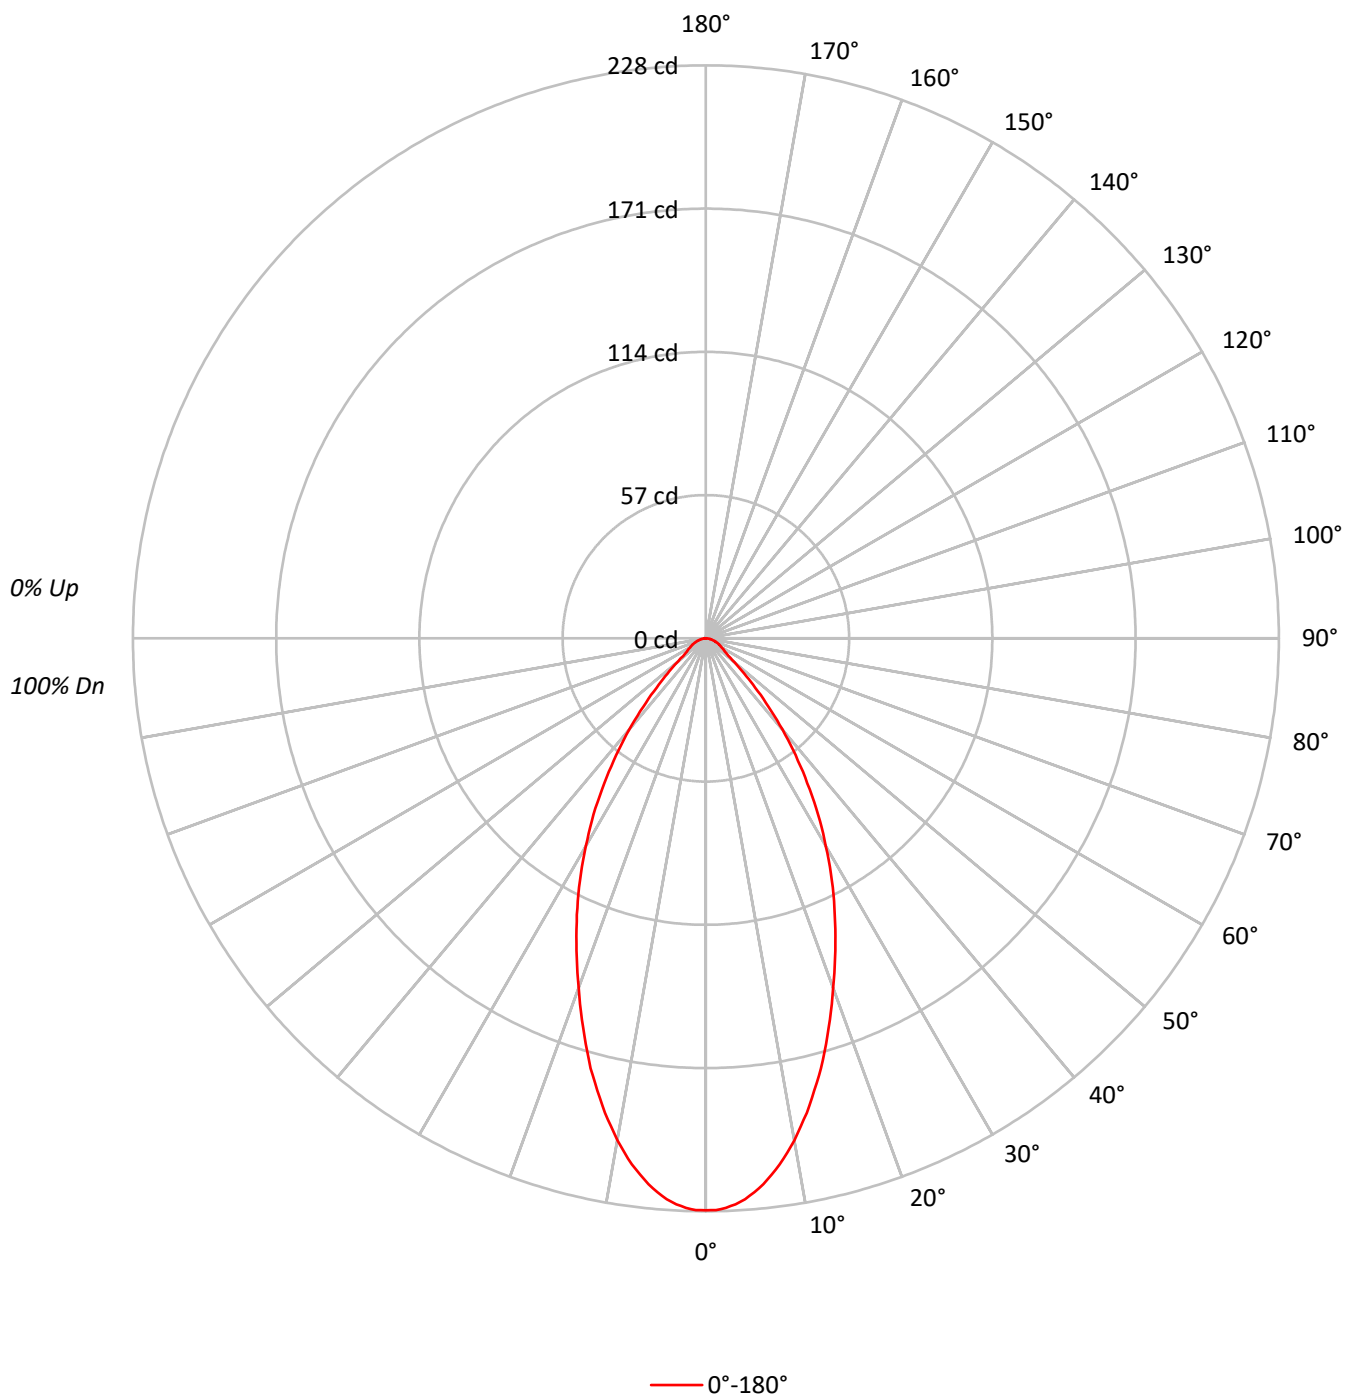

TEST NUMBER: P1256163

CATALOG NUMBER: P3AS02R259040DE010 E3DLD1WMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     |     | 20  |     |     |     |     | 20  |     |     |     |    | 20 |
| RC  | 80  |     |     |     | 70  |     |     |     |     | 50  |     |     |     |     | 30  |     |     |     |    | 10 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 112 | 109 | 106 | 104 | 110 | 107 | 104 | 102 | 103 | 101 | 99  | 99  | 98  | 96  | 96  | 94  | 93  | 91  |    |    |
| 2   | 106 | 100 | 96  | 92  | 104 | 99  | 94  | 91  | 95  | 92  | 89  | 92  | 89  | 87  | 89  | 87  | 85  | 83  |    |    |
| 3   | 100 | 92  | 87  | 82  | 98  | 91  | 86  | 82  | 88  | 84  | 80  | 86  | 82  | 79  | 83  | 80  | 78  | 76  |    |    |
| 4   | 94  | 85  | 79  | 74  | 92  | 84  | 78  | 74  | 82  | 77  | 73  | 80  | 76  | 72  | 78  | 74  | 71  | 70  |    |    |
| 5   | 89  | 79  | 73  | 68  | 87  | 78  | 72  | 68  | 76  | 71  | 67  | 75  | 70  | 66  | 73  | 69  | 66  | 64  |    |    |
| 6   | 84  | 74  | 67  | 62  | 82  | 73  | 67  | 62  | 71  | 66  | 62  | 70  | 65  | 61  | 69  | 64  | 61  | 59  |    |    |
| 7   | 79  | 69  | 62  | 58  | 78  | 68  | 62  | 58  | 67  | 61  | 57  | 66  | 61  | 57  | 65  | 60  | 57  | 55  |    |    |
| 8   | 75  | 65  | 58  | 54  | 74  | 64  | 58  | 53  | 63  | 57  | 53  | 62  | 57  | 53  | 61  | 56  | 53  | 51  |    |    |
| 9   | 71  | 61  | 54  | 50  | 70  | 60  | 54  | 50  | 59  | 54  | 50  | 58  | 53  | 50  | 57  | 53  | 49  | 48  |    |    |
| 10  | 68  | 57  | 51  | 47  | 67  | 57  | 51  | 47  | 56  | 50  | 47  | 55  | 50  | 46  | 54  | 50  | 46  | 45  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 49908 |
| 5°  | 48712 |
| 10° | 45156 |
| 15° | 40205 |
| 20° | 34560 |
| 25° | 29373 |
| 30° | 24181 |
| 35° | 18846 |
| 40° | 13568 |
| 45° | 8590  |
| 50° | 5083  |
| 55° | 3517  |
| 60° | 3201  |
| 65° | 3009  |
| 70° | 2693  |
| 75° | 2457  |
| 80° | 2273  |
| 85° | 2013  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
Vertical Angle: 45°  
Luminance: 8590 cd/sqm

TEST NUMBER: P1256163

CATALOG NUMBER: P3AS02R259040DE010 E3DLD1WMH

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 20.5   | 9.8       |
| 10°-20°   | 49.2   | 23.4      |
| 20°-30°   | 55.6   | 26.5      |
| 30°-40°   | 44.0   | 20.9      |
| 40°-50°   | 22.2   | 10.6      |
| 50°-60°   | 8.9    | 4.2       |
| 60°-70°   | 5.7    | 2.7       |
| 70°-80°   | 3.2    | 1.5       |
| 80°-90°   | 0.9    | 0.4       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| <hr/>     |        |           |
| 0°-30°    | 125.3  | 59.6      |
| 0°-40°    | 169.2  | 80.6      |
| 0°-60°    | 200.3  | 95.4      |
| 0°-90°    | 210.1  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 210.1  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 228 |      |
| 5°  | 221 | 21   |
| 15° | 177 | 49   |
| 25° | 121 | 56   |
| 35° | 70  | 44   |
| 45° | 28  | 22   |
| 55° | 9   | 9    |
| 65° | 6   | 6    |
| 75° | 3   | 3    |
| 85° | 1   | 1    |
| 90° | 0   |      |

TEST NUMBER: P1256163

CATALOG NUMBER: P3AS02R259040DE010 E3DLD1WMH

**CANDELA DISTRIBUTION (FULL):**

| 0°    |       |
|-------|-------|
| 0°    | 227.6 |
| 1°    | 227.6 |
| 2°    | 226.8 |
| 3°    | 225.5 |
| 4°    | 223.7 |
| 5°    | 221.3 |
| 6°    | 218.4 |
| 7°    | 215.0 |
| 8°    | 211.4 |
| 9°    | 207.2 |
| 10°   | 202.8 |
| 11°   | 197.8 |
| 12°   | 193.1 |
| 13°   | 187.6 |
| 14°   | 182.3 |
| 15°   | 177.1 |
| 17.5° | 162.5 |
| 20°   | 148.1 |
| 22.5° | 134.5 |
| 25°   | 121.4 |
| 27.5° | 108.6 |
| 30°   | 95.5  |
| 32.5° | 83.2  |
| 35°   | 70.4  |
| 37.5° | 58.6  |
| 40°   | 47.4  |
| 42.5° | 36.9  |
| 45°   | 27.7  |
| 47.5° | 20.7  |
| 50°   | 14.9  |
| 52.5° | 11.2  |
| 55°   | 9.2   |
| 57.5° | 8.4   |
| 60°   | 7.3   |
| 62.5° | 6.5   |
| 65°   | 5.8   |
| 67.5° | 5.0   |
| 70°   | 4.2   |
| 72.5° | 3.7   |
| 75°   | 2.9   |
| 77.5° | 2.4   |
| 80°   | 1.8   |
| 82.5° | 1.3   |
| 85°   | 0.8   |
| 87.5° | 0.3   |



TEST NUMBER: P1256163

CATALOG NUMBER: P3AS02R259040DE010 E3DLD1WMH

CANDELA DISTRIBUTION (continued):



(END OF REPORT)