

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256179

Luminaire Tested: P3AS02R309040DE010 E3D1H

Issue Date: 1/29/2026

Test Information

Test Method: LM-79-2019
Report Number: P1256179
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2501-338-10)
Test Lab: INNOVATION CENTER
Issue Date: 1/29/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R309040DE010 E3D1H
Description: 3in Adjustable LED luminaire with, R30 optic, 4000K CCT AND, 90CRI , E3D1H TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 331.0 lumens
Efficiency: N/A
Efficacy: 91.9 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.47
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1256179

CATALOG NUMBER: P3AS02R309040DE010 E3D1H

Luminous Intensity Polar Plot

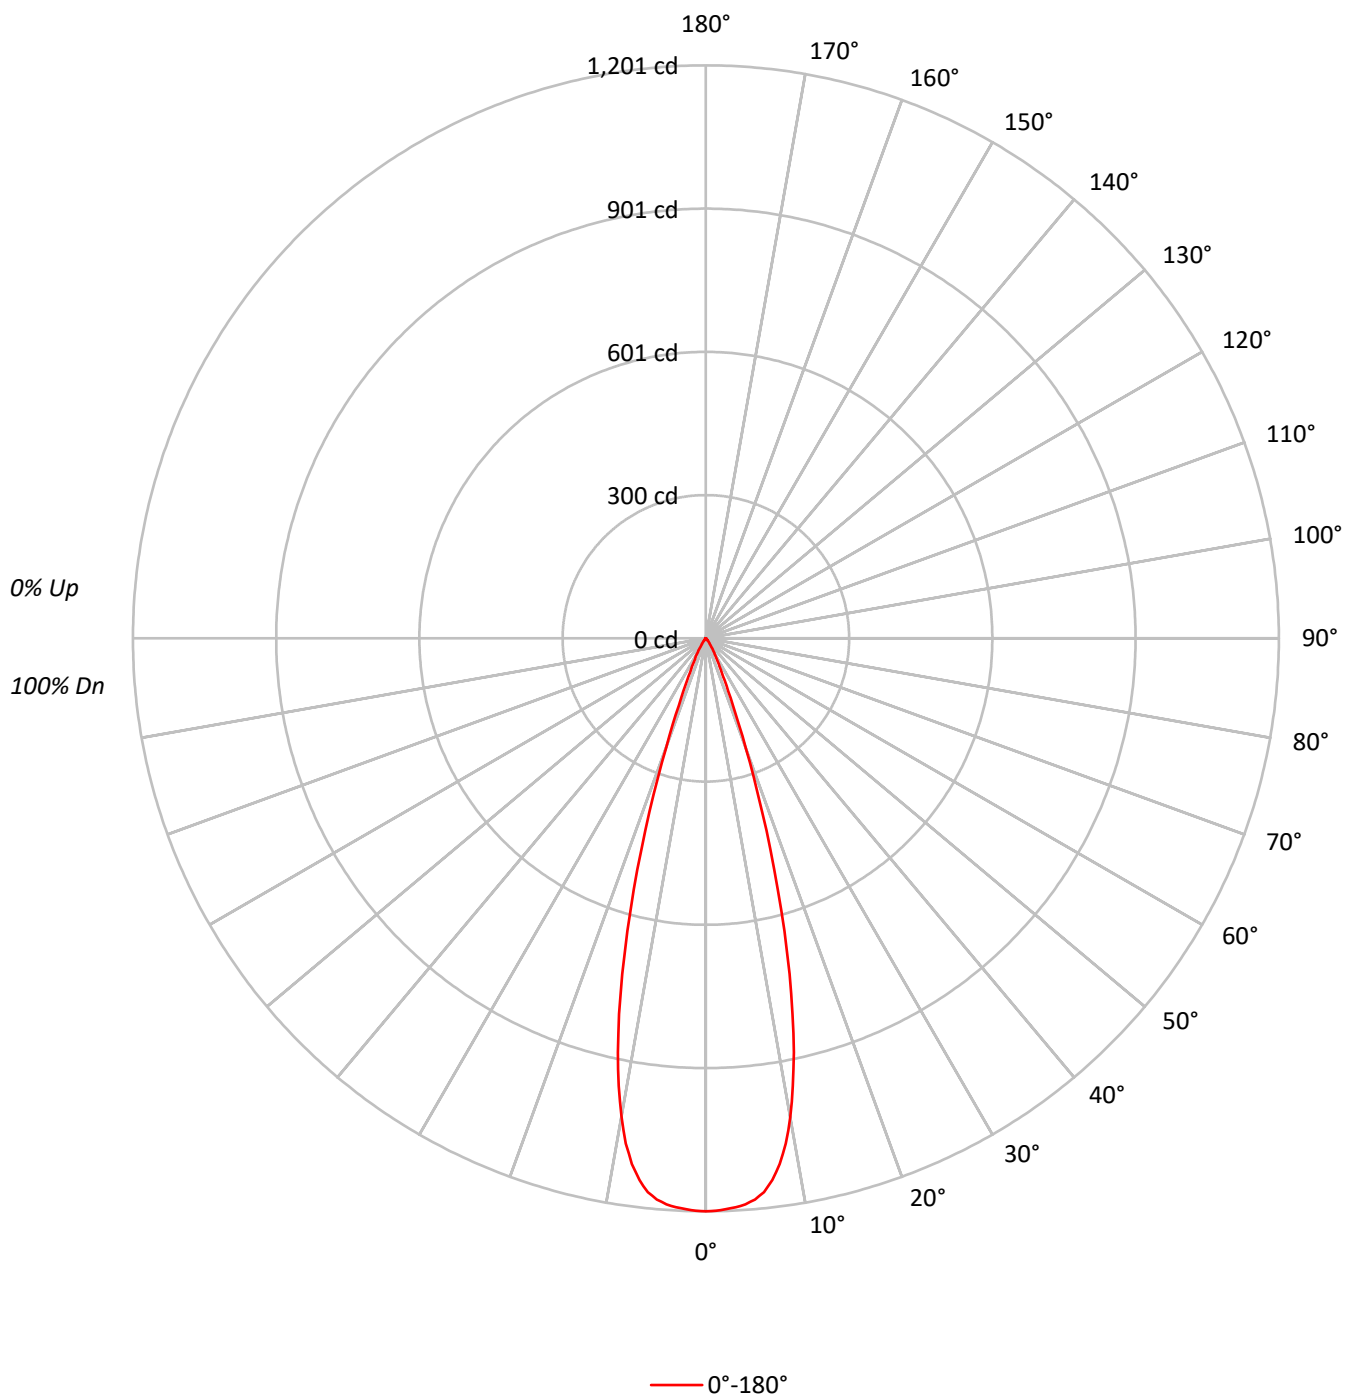

TEST NUMBER: P1256179

CATALOG NUMBER: P3AS02R309040DE010 E3D1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	119	119	119	119		116	116	116	116		111	111	111		106	106	106		102	102	102
1	115	113	111	109		113	111	109	108		107	106	104		103	102	101		100	99	98
2	111	108	105	102		109	106	103	101		103	101	99		100	98	97		97	96	95
3	108	103	100	97		106	102	99	96		99	97	95		97	95	93		95	93	92
4	105	99	95	92		103	98	95	92		96	93	91		94	92	90		93	91	89
5	101	96	92	89		100	95	91	88		93	90	87		92	89	87		90	88	86
6	99	92	88	85		97	92	88	85		90	87	85		89	86	84		88	85	83
7	96	89	85	82		95	89	85	82		88	84	82		87	84	81		86	83	81
8	93	87	83	80		92	86	82	80		85	82	79		84	81	79		84	81	79
9	91	84	80	77		90	84	80	77		83	79	77		82	79	77		82	79	77
10	88	82	78	75		88	81	78	75		81	77	75		80	77	75		80	77	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	263356
5°	259916
10°	226939
15°	144246
20°	57148
25°	19090
30°	8887
35°	4015
40°	1546
45°	744
50°	205
55°	115
60°	44
65°	52
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 744 cd/sqm

TEST NUMBER: P1256179

CATALOG NUMBER: P3AS02R309040DE010 E3D1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	108.0	32.6
10°-20°	167.4	50.6
20°-30°	43.2	13.0
30°-40°	10.1	3.1
40°-50°	2.0	0.6
50°-60°	0.2	0.1
60°-70°	0.1	0.0
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	318.5	96.2
0°-40°	328.7	99.3
0°-60°	330.9	100.0
0°-90°	331.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	331.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1201	
5°	1181	108
15°	635	167
25°	79	43
35°	15	10
45°	2	2
55°	0	0
65°	0	0
75°	0	0
85°	0	0
90°	0	

TEST NUMBER: P1256179

CATALOG NUMBER: P3AS02R309040DE010 E3D1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	1201.0
1°	1200.1
2°	1197.3
3°	1194.1
4°	1189.3
5°	1180.8
6°	1167.1
7°	1144.2
8°	1113.0
9°	1072.2
10°	1019.2
11°	956.1
12°	887.2
13°	807.9
14°	724.9
15°	635.4
16°	547.6
17°	463.1
18°	382.0
19°	307.6
20°	244.9
21°	192.7
22°	151.6
23°	120.0
24°	96.1
25°	78.9
26°	65.8
27°	55.9
28°	48.3
29°	41.4
30°	35.1
32.5°	22.1
35°	15.0
37.5°	9.4
40°	5.4
42.5°	3.6
45°	2.4
47.5°	1.4
50°	0.6
52.5°	0.3
55°	0.3
57.5°	0.1
60°	0.1
62.5°	0.1
65°	0.1



TEST NUMBER: P1256179

CATALOG NUMBER: P3AS02R309040DE010 E3D1H

CANDELA DISTRIBUTION (continued):

	0°
67.5°	0.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)