

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: IRiS

Report Number: P1256394

Luminaire Tested: P3AS02R659040DE010 E3DLD1MW

Issue Date: 1/30/2026

Test Information

Test Method: LM-79-2019
Report Number: P1256394
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2601-647-42)
Test Lab: INNOVATION CENTER
Issue Date: 1/30/2026
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: IRiS
Catalog Number: P3AS02R659040DE010 E3DLD1MW
Description: 3in Adjustable LED luminaire with, R65 optic, 4000K CCT AND, 90CRI , E3DLD1MW TRIM
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 205.9 lumens
Efficiency: N/A
Efficacy: 57.2 lumens/watt
Spacing Criteria (0/90/45): 0.94 / 0.94 / 1
Luminous Opening: Circular (Dia: 0.25' x H: 0')
CIE Type: Direct

Input Watts (W): 3.6
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P1256394

CATALOG NUMBER: P3AS02R659040DE010 E3DLD1MW

Luminous Intensity Polar Plot

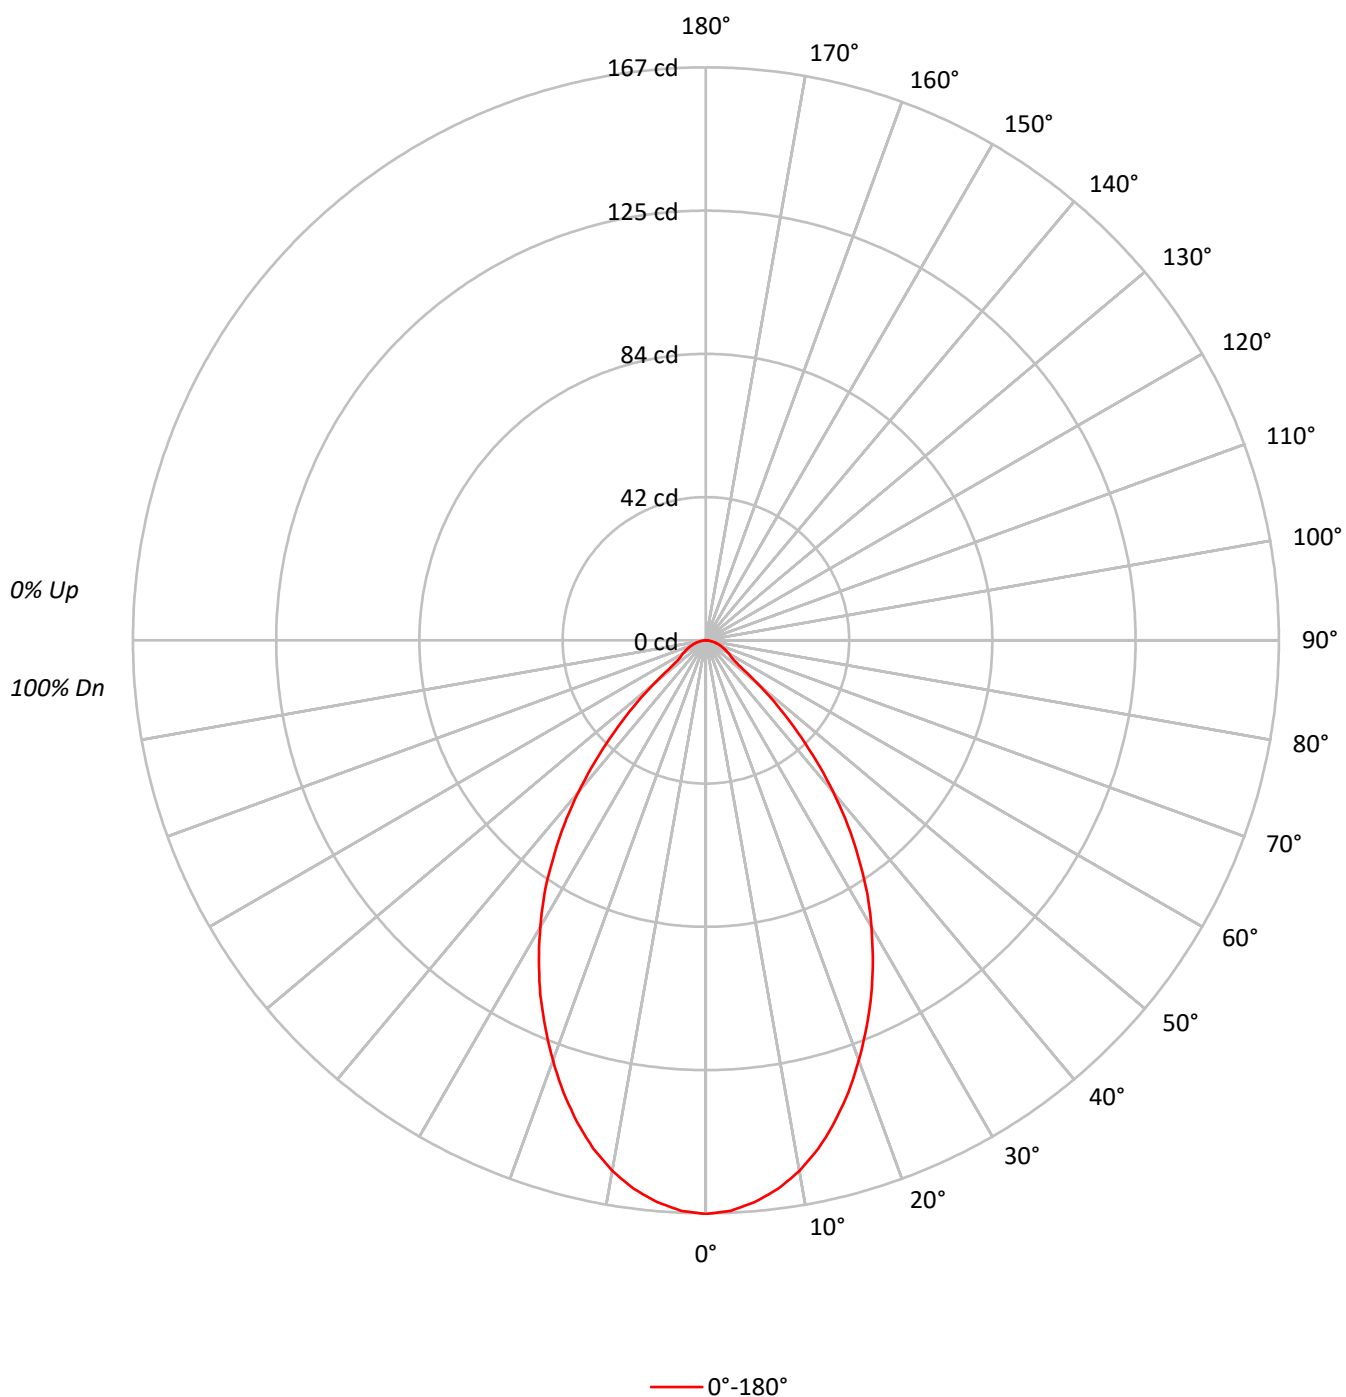

TEST NUMBER: P1256394

CATALOG NUMBER: P3AS02R659040DE010 E3DLD1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102
1	112	109	106	103	110	107	104	101	102	100	98		99	97	95		95
2	105	99	94	90	103	98	93	89	94	90	87		91	88	85		88
3	99	91	85	80	96	89	84	79	87	82	78		84	80	77		82
4	92	83	77	72	91	82	76	71	80	75	71		78	73	70		76
5	87	77	70	65	85	76	69	65	74	68	64		72	67	63		71
6	82	71	64	59	80	70	64	59	69	63	58		67	62	58		66
7	77	66	59	54	75	65	59	54	64	58	54		63	57	53		61
8	72	61	55	50	71	61	54	50	60	54	49		59	53	49		58
9	68	57	51	46	67	57	50	46	56	50	46		55	50	46		54
10	65	54	47	43	64	53	47	43	52	47	43		52	46	42		51

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	36664
5°	36165
10°	34958
15°	32963
20°	30406
25°	27606
30°	24434
35°	20800
40°	16545
45°	11691
50°	6789
55°	3708
60°	3421
65°	3113
70°	2821
75°	2626
80°	2273
85°	2013

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 11691 cd/sqm

TEST NUMBER: P1256394

CATALOG NUMBER: P3AS02R659040DE010 E3DLD1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	15.5	7.5
10°-20°	40.6	19.7
20°-30°	52.2	25.4
30°-40°	48.3	23.4
40°-50°	29.2	14.2
50°-60°	9.9	4.8
60°-70°	6.0	2.9
70°-80°	3.3	1.6
80°-90°	1.0	0.5
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	108.3	52.6
0°-40°	156.6	76.0
0°-60°	195.7	95.0
0°-90°	205.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	205.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	167	
5°	164	15
15°	145	41
25°	114	52
35°	78	48
45°	38	29
55°	10	10
65°	6	6
75°	3	3
85°	1	1
90°	0	

TEST NUMBER: P1256394

CATALOG NUMBER: P3AS02R659040DE010 E3DLD1MW

CANDELA DISTRIBUTION (FULL):

0°	
0°	167.2
2.5°	166.4
5°	164.3
7.5°	161.2
10°	157.0
12.5°	151.7
15°	145.2
17.5°	138.1
20°	130.3
22.5°	122.2
25°	114.1
27.5°	105.4
30°	96.5
32.5°	87.6
35°	77.7
37.5°	68.0
40°	57.8
42.5°	47.6
45°	37.7
47.5°	28.5
50°	19.9
52.5°	12.6
55°	9.7
57.5°	8.6
60°	7.8
62.5°	6.8
65°	6.0
67.5°	5.2
70°	4.4
72.5°	3.9
75°	3.1
77.5°	2.6
80°	1.8
82.5°	1.3
85°	0.8
87.5°	0.5
90°	0.0

(END OF REPORT)